


MIRO TH 24VDC SK 5P OPTO-COUPLER MODULE



IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
with auxiliary common contacts
Screw terminals

[Link to Product](#)

Illustration

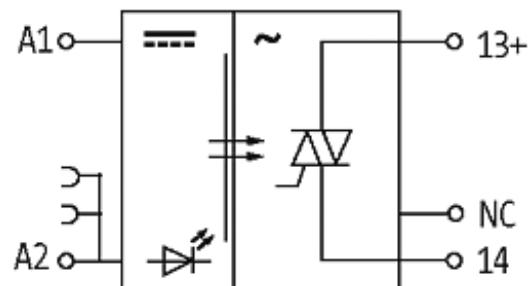

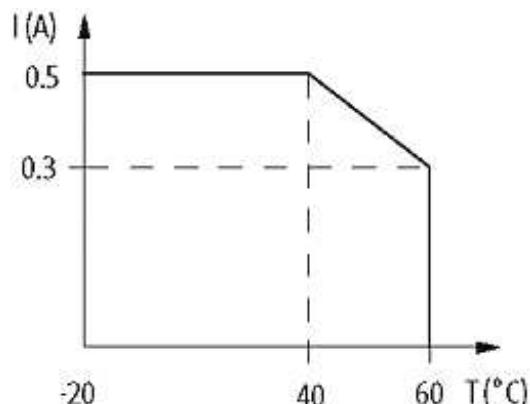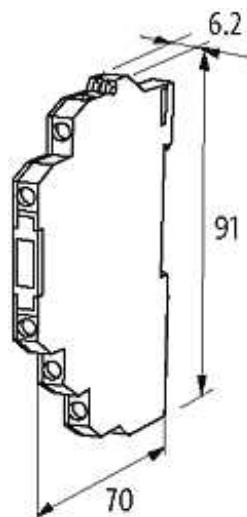

Product may differ from Image

Approvals



Input

Voltage range ON	10...44 V DC
Voltage range OFF	0...3 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H x W x D	91x6.2x70 mm

Output

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Switching voltage	12...250 V AC
Switching current per output	1 mA...0.5 A
Saturation voltage (across output)	max. 1.5 V AC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20 Hz, depending on suppression

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1