


AKTIVE INTERFACEMODUL 8-WAY


IN: 24 VDC - OUT: 250 VAC/DC / 6 A

Compact design
with plug relays
8 plugged relays; each 1 NO/NC contact
24 V DC
Diode + LED

[Link to Product](#)

Illustration

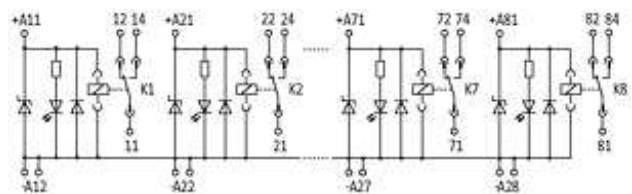

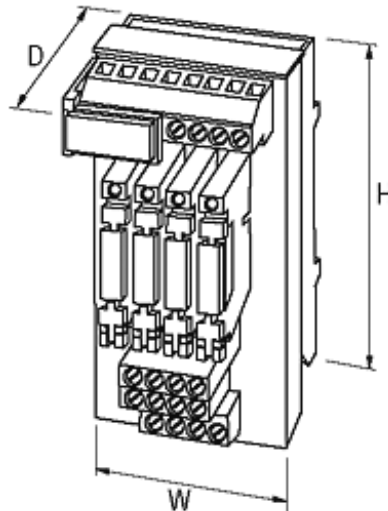

Product may differ from Image

Utilization category

| | |
|-------|---|
| AC-12 | 6 A (24/110/230 V AC) |
| AC-15 | 3 A (24/110/230 V AC) |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |

General data

| | |
|------------------------|---|
| Connection | Screw terminals: max. 4 mm ² , with separate -A2 connections |
| Test isolation voltage | 4 kV (input/output) |
| Mounting method | DIN-rail mountable (EN 60715) |
| Dimensions H × W × D | 86×67.5×75 mm |

Technical Data

| | |
|-------------------|------------------|
| Switching voltage | 12...250 V AC/DC |
| Switching current | max. 6 A |
| Min. load current | 10 mA |

Commercial data

| | |
|------------------------|----------|
| country of origin | CZ |
| customs tariff number | 85437090 |
| minimum order quantity | 1 |