


PKB 1 FOR SIGNAL TRANSFER


250V / 15 A

4×22-pole 15 A per potential rail Screw plug-in terminals

Link to Product

Illustration

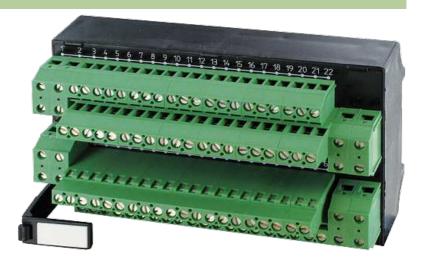




The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Murrelektronik GmbH | Falkenstraße 3,71570 Oppenweiler | Fon +49 (71 91) 47-0, Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com



stay connected



Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Connection	Screw plug-in terminal: max. 4 mm ² , single wire
Dimensions H × W × D	63×140×48 mm
Temperature range	-20+60 °C
Technical Data	
Operating voltage	max. 250 V AC
Operating current per bit	15 A per potential rail
Material group	EN 60664-1 over voltage, category II
Commercial data	
country of origin	CZ
customs tariff number	85369010
minimum order quantity	1

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Murrelektronik GmbH | Falkenstraße 3,71570 Oppenweiler | Fon +49 (71 91) 47-0, Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com