

PKB 2 FOR SIGNAL TRANSFER



250V / 25 A


4×22-pole
25 A per potential rail
Screw plug-in terminals

Input terminal: max. 6 mm² single core, total current: max. 100 A

[Link to Product](#)

Illustration

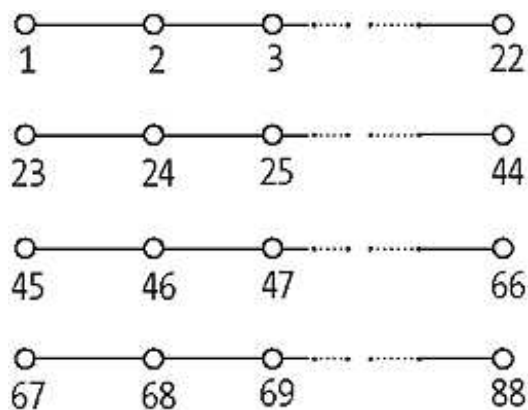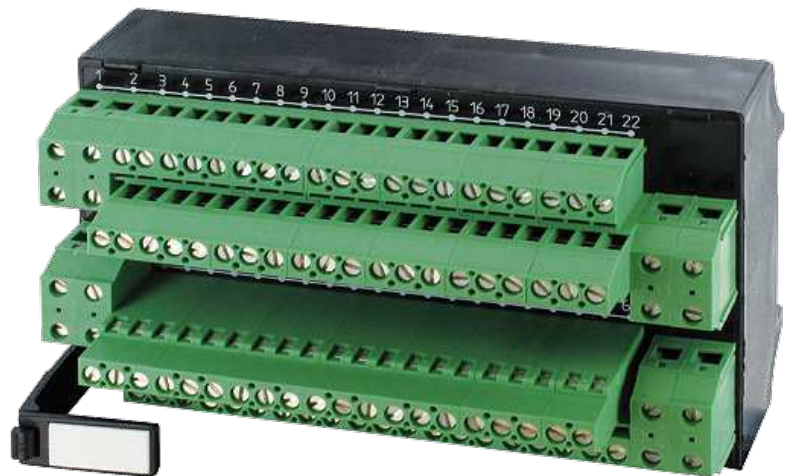

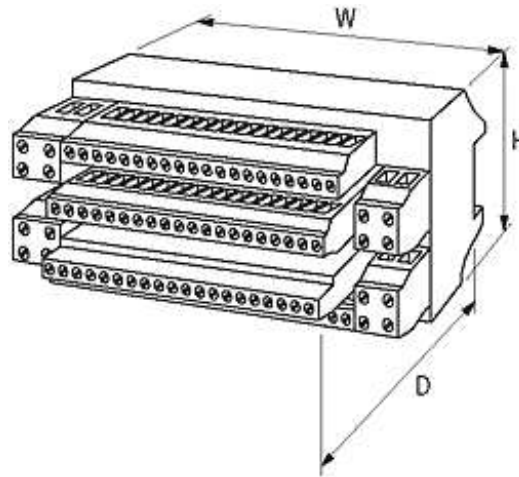

Product may differ from Image

General data

| | |
|----------------------|---|
| Connection | Screw plug-in terminal: max. 4 mm ² , input terminal: max. 6 mm ² single wire (AWG 9) |
| Mounting method | DIN-rail mountable (EN 60715) |
| Dimensions H × W × D | 75×135×66 mm |
| Temperature range | -20...+60 °C |

Technical Data

| | |
|---------------------------|--------------------------------------|
| Operating voltage | max. 250 V AC |
| Operating current per bit | 25 A per potential rail |
| Total current | max. 100 A |
| Material group | EN 60664-1 over voltage, category II |

Commercial data

| | |
|------------------------|----------|
| country of origin | CZ |
| customs tariff number | 85369010 |
| minimum order quantity | 1 |