K 2-24 V DC PLUG-IN RELAY

IN: 24 VDC - OUT: 125 VAC/DC / 2 A

2 NO/NC contacts
24 V DC

Relays with other voltage available on request.

Link to Product

Illustration

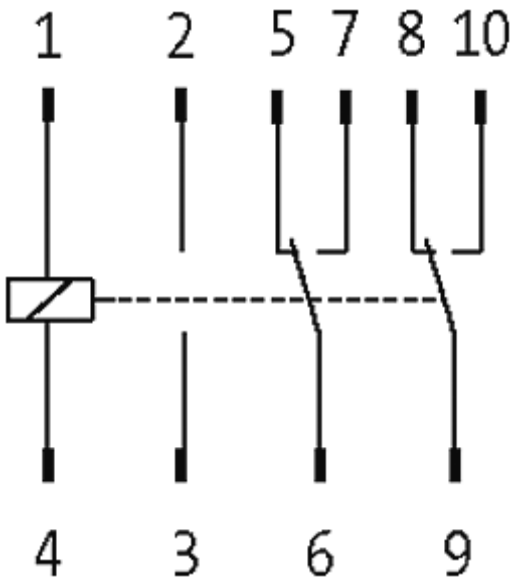

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

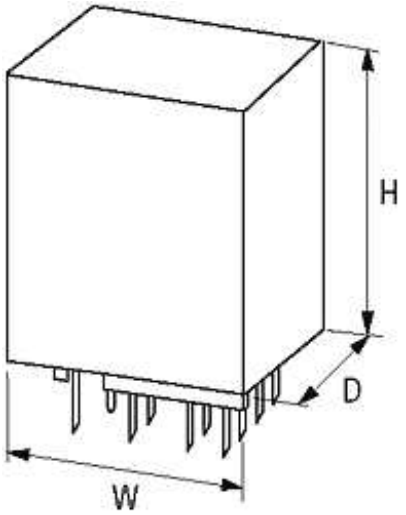

Product may differ from Image

General data	
Dimensions H × W × D	30×24×19 mm
Contact material	Ag Ni 0.15 hv; Ag hv
Technical Data	
Switching voltage	max. 125 V AC/250 V DC
Switching current	max. 2 A
Power rating (voltage dependent)	max. 50 VA/0.7 W
Max. power (W)	max. 2.2 VA/0.7 W
Switching time	6 ms
Commercial data	
country of origin	SI
customs tariff number	85364900
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16