


Emergency stop with 2 positive opening

contacts in a 42mm enclosure


E-Stop 42 2NC M12(5)
with M12 connection
5-pole
2 NC (positively-opening)

[Link to Product](#)

Illustration

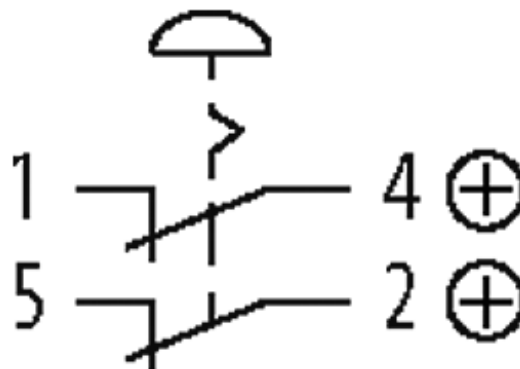

Male




PIN 1: N/C 1

PIN 2: N/C 2

PIN 3: n.c.

PIN 4: N/C 1

PIN 5: N/C 2

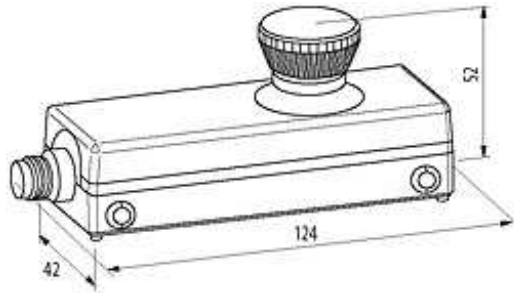

Product may differ from Image

Approvals



Contact layout

PIN 1	N/C 1
PIN 2	N/O 2
PIN 3	n.c.
PIN 4	N/C 1
PIN 5	N/O 2

General data

Mech./ elect. life	50.000 actuations, load-temperature dependent
Lambda (d)	20 % (N/C)
B10d	250.000
Contact material	Ag Ni
Protection	IP65
Connection	M12 (5-pole)
Mounting method	with clip on back
Dimensions H x W x D	52x124x42 mm
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)

Technical Data

Contact bounce time	max. 10 ms
Operating voltage	24 V AC/DC
Operating current	2 A

Commercial data

country of origin	DE
customs tariff number	85365080
minimum order quantity	1