

Emergency stop with 2 positive opening

contacts in a IP65 enclosure

E-Stop 42 2NC L M12(8)

with M12 connection



8-pole


1 button can be lit

2 NC (positively-opening)


[Link to Product](#)

Illustration

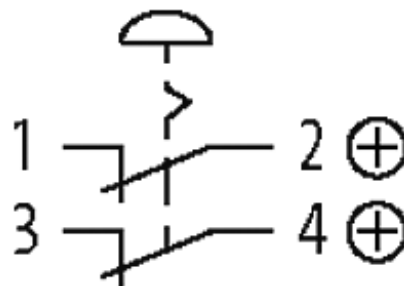



| | |
|--------|--------|
| PIN 1: | N/C 1 |
| PIN 2: | N/C 1 |
| PIN 3: | N/C 2 |
| PIN 4: | N/C 2 |
| PIN 5: | n.c. |
| PIN 6: | n.c. |
| PIN 7: | (X2/-) |
| PIN 8: | (X1/+) |

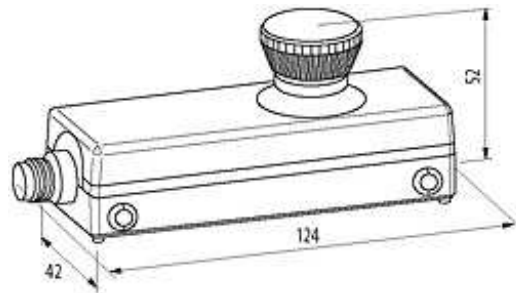

Product may differ from Image

Approvals



Contact layout

| | |
|-------|--------|
| PIN 1 | N/C 1 |
| PIN 2 | N/C 1 |
| PIN 3 | N/C 2 |
| PIN 4 | N/C 2 |
| PIN 5 | n.c. |
| PIN 6 | n.c. |
| PIN 7 | (X2/-) |
| PIN 8 | (X1/+) |

General data

| | |
|--------------------|---|
| Mech./ elect. life | 50.000 actuations, load-temperature dependent |
| Lambda (d) | 20 % (N/C) |
| B10d | 250.000 |
| Contact material | Ag Ni |
| Protection | IP65 |
| Connection | M12 (8-pole) |
| Mounting method | with clip on back |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

| | |
|----------------------|---|
| Dimensions H x W x D | 52x124x42 mm |
| Temperature range | -25...+70 °C (storage temperature -25...+85 °C) |

Technical Data

| | |
|---------------------|-------------------------------------|
| Operating voltage | 1...36 V DC (UR: 30 V DC) |
| Operating current | 1.5 A |
| LED Light | max. 30 V AC/DC typ. 4 mA (24 V DC) |
| Contact bounce time | max. 10 ms |

Commercial data

| | |
|------------------------|----------|
| country of origin | DE |
| customs tariff number | 85365080 |
| minimum order quantity | 1 |