

## Emergency stop with 2 positive opening

contacts in a IP65 enclosure

E-Stop / R-B 42 2NC 1NO M12(8)

with M12 connection


8-pole


2 NC (positively-opening)

1 NO contact


### [Link to Product](#)

#### Illustration

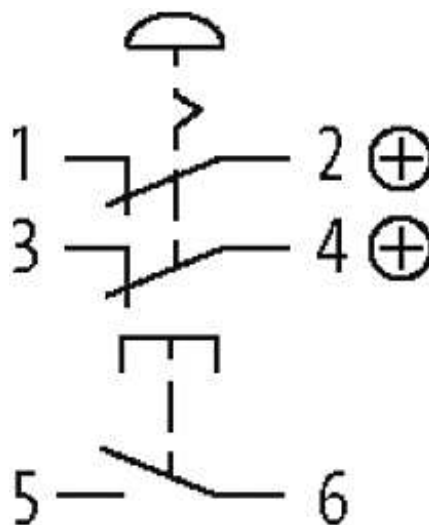



PIN 1:	N/C 1
PIN 2:	N/C 1
PIN 3:	N/C 2
PIN 4:	N/C 2
PIN 5:	N/O 1
PIN 6:	N/O 1
PIN 7:	n.c.
PIN 8:	n.c.

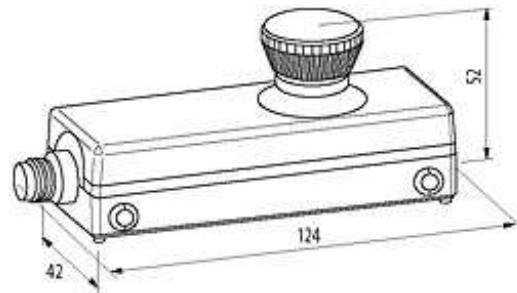

Product may differ from Image

### Approvals



### Contact layout

PIN 1	Emergency-Stop: NC-1
PIN 2	Emergency-Stop: NC-1
PIN 3	Emergency-Stop: NC-2
PIN 4	Emergency-Stop: NC-2
PIN 5	Button: N/O 1
PIN 6	Button: N/O 1
PIN 7	Button: n.c.
PIN 8	Button: n.c.

### General data

Mech./ elect. life	50.000 actuations, load-temperature dependent
Lambda (d)	20 % (N/C)
B10d	250.000
Contact material	Ag Ni
Protection	IP65
Connection	M12 (8-pole)
Mounting method	with clip on back

Dimensions H × W × D	52×124×42 mm
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)

**Technical Data**

Contact bounce time	max. 10 ms
Operating current	1.5 A

**Commercial data**

country of origin	DE
customs tariff number	85365080
minimum order quantity	1