


2 illuminated push buttons


In a IP65 enclosure

R-Button / 42 2NO L M12(8)
with M12 connection
8-pole
2 buttons can be lit
2 NO contact


[Link to Product](#)

Illustration

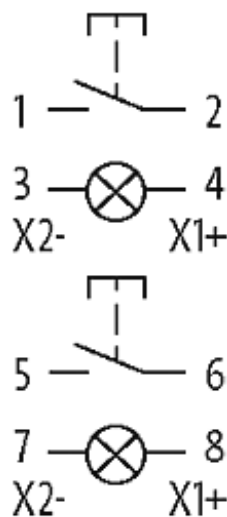



PIN 1:	N/C 1
PIN 2:	N/C 1
PIN 3:	(X2/-)
PIN 4:	(X1/+)
PIN 5:	N/C 2
PIN 6:	N/C 2
PIN 7:	(X2/-)
PIN 8:	(X1/+)

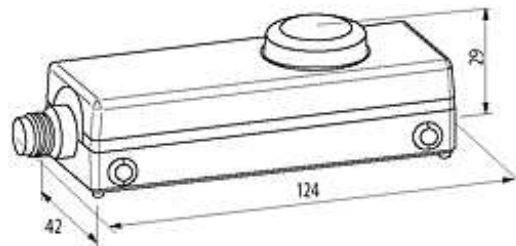

Product may differ from Image

Emergency-Stop button	UR
Housing	UR
Contact layout	
PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	(X2/-)
PIN 4	(X1/+)
PIN 5	N/C 2
PIN 6	N/C 2
PIN 7	(X2/-)
PIN 8	(X1/+)
General data	
Mech./ elect. life	1,000,000 operations, load-temperature dependent
Contact material	Ag Ni
Protection	IP65
Connection	M12 (8-pole)
Mounting method	with clip on back
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Dimensions H x W x D	29x124x42 mm
Technical Data	
Operating voltage	1...36 V DC (UR: 30 V DC)
Operating current	1.5 A

LED Light	max. 30 V AC/DC typ. 14 mA (24 V DC)
-----------	--------------------------------------

Contact bounce time	max. 10 ms
---------------------	------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85365080
-----------------------	----------

minimum order quantity	1
------------------------	---