


Reset Button with illumination



e.g. for MVK M12 4-pol.

R-Button / 42 1NO L M12(4)
with M12 connection
4-pole
1 button can be lit
1 NO contact

[Link to Product](#)

Illustration

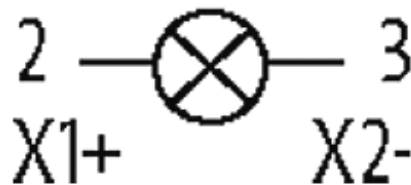

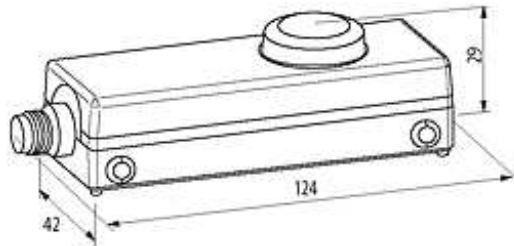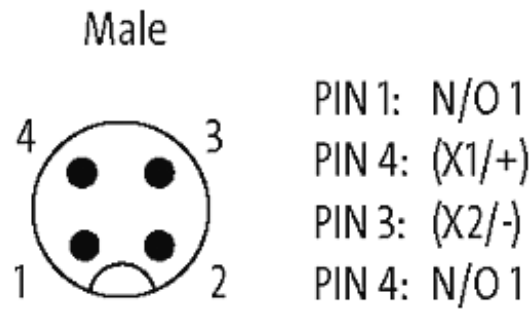

Product may differ from Image

Emergency-Stop button	UR
Housing	UR
Contact layout	
PIN 1	N/O 1
PIN 2	(X1/+)
PIN 3	(X2/-)
PIN 4	N/O 1
Utilization category	
AC-15	1.5 A (240 V AC)
DC-13	2 A (24 V DC)
General data	
Mech./ elect. life	1,000,000 operations, load-temperature dependent
Contact material	Ag Ni
Lambda (d)	50 % (N/O)
B10d	1.000.000
Protection	IP65
Connection	M12 (8-pole)
Mounting method	with clip on back
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Dimensions H x W x D	29x124x42 mm
Technical Data	
Switching capacity	15 A (AC 15); 2.2 A (DC 13)
LED Light	max. 30 V AC/DC typ. 14 mA (24 V DC)
Contact bounce time	max. 10 ms

Commercial data

customs tariff number	85365080
minimum order quantity	1