


## MIRO 6.2 24V-1U OUTPUT RELAY WITH ISOLATION FUNCT.




IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact  
with output isolation link  
24 V AC/DC  
Spring clamp terminals

### [Link to Product](#)

#### Illustration

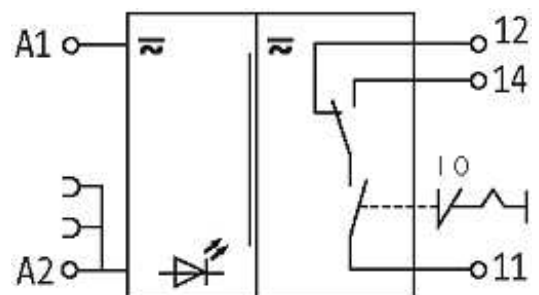

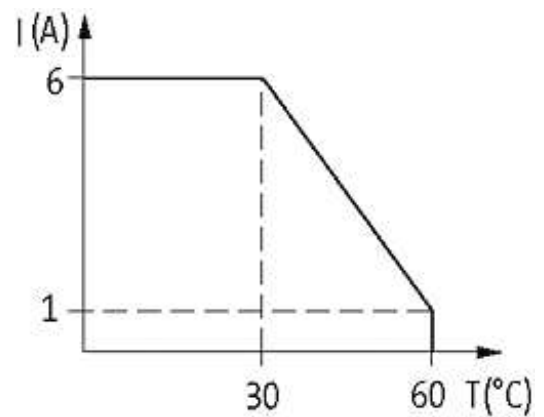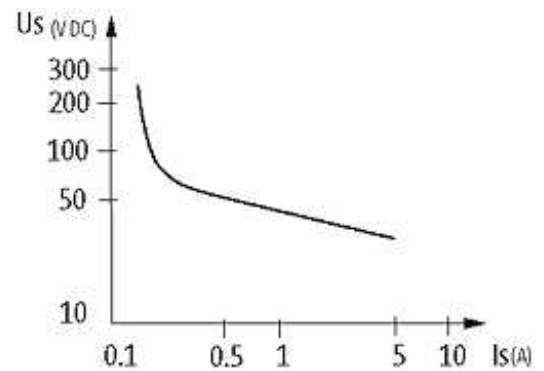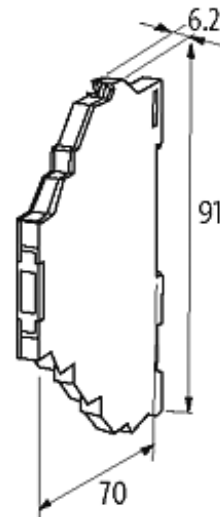

Product may differ from Image

### Approvals



### Input

Connection voltage - current	24 VAC/DC (19.2...30 VAC/DC) - 17mA
LED display	LED (green)

**Utilization category**

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

**General data**

Mech./ elect. life	20.000.000 switching cycles/load dependent
Test isolation voltage	4 kV; safe separation (EN 60947-1)
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+55 °C
Dimensions H × W × D	91×6.2×70 mm

**Output**

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 6 A
Min. load current	100 mA (12 V DC)
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O <sub>2</sub>
Energize/release/contact bounce time	10/15/1.5 ms

**Commercial data**

country of origin	CZ
customs tariff number	85364900
minimum order quantity	1