

MIRO 6.2 OPTO-COUPLER MODULE

IN: 230 VAC/DC - OUT: 253 VAC/DC / 0,5 A

Multi voltage output


Transistor 0.5 A


24...230 V AC/DC

Spring clamp terminals

[Link to Product](#)

Illustration

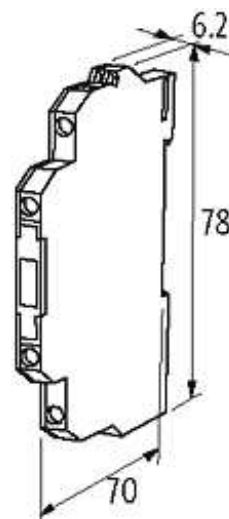

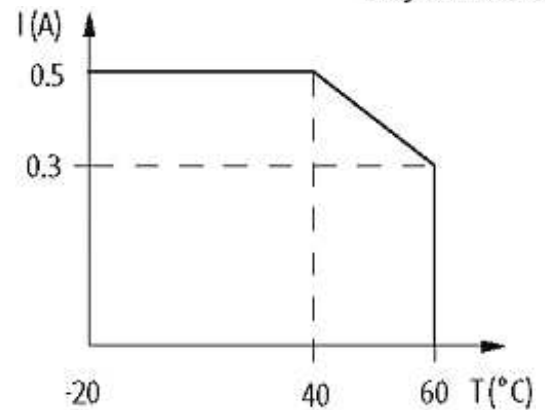stay connected

Product may differ from Image

Input

Voltage range ON	10...230 V AC/DC
Voltage range OFF	0...5 V AC/DC
Control current	5 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.75 kV
Dimensions H × W × D	78×6.2×70 mm
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

Output

Switching time ON/OFF	5/15 ms
Switching voltage	10...230 V AC/DC
Switching current per output	1 mA...0.5 A
Saturation voltage (across output)	max. 2.6 V AC/DC
Leakage current (output is open)	max. 20 µA
Switching frequency	max. 2.5 Hz

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1