
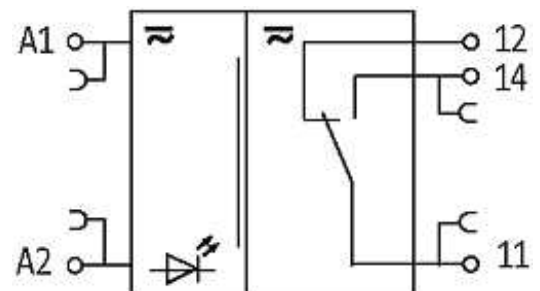


**MIRO 6.2 PLUGGABLE COMPL.MODULE INPUT RELAY**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact  
24 V AC/DC  
Spring clamp terminals

[Link to Product](#)**Illustration**

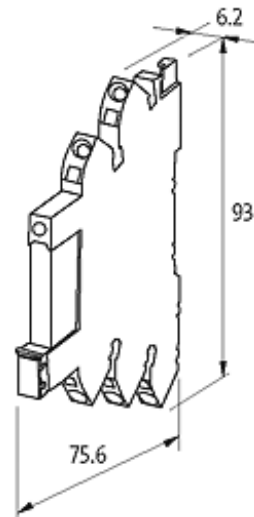

Product may differ from Image

### Approvals



### Input

Connection voltage - current	24 VAC/DC (19.2...26.8 VAC/DC) - 14mA
LED display	LED (green)

### Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110 V AC); 1.5 A (230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

### General data

Test isolation voltage	250 V
Mech./ elect. life	10.000.000 switching cycles (NO) 30.000; (NC) 10.000, load dependent
Protection	IP20
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H x W x D	93x6.2x75.6 mm
Temperature range	-25...+60 °C

### Output

Switching voltage	max. 250 V AC/30 V DC
Switching current per output	max. 6 A
Min. load current	10 mA
Power rating (voltage dependent)	max. 1500 VA/180 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O2 Gold plated

Energize/release/contact bounce time 8/4/- ms

**Commercial data**

country of origin CN

customs tariff number 85364900

minimum order quantity 1