


## MIRO 6.2 pluggable Plug-in module Optocoupler

IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A  
24 V DC

### [Link to Product](#)

#### Illustration

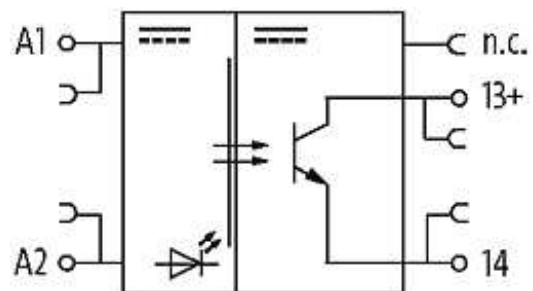

Product may differ from Image

#### Input

Connection voltage - current	24 V DC (18...30 VAC/DC) - 9 mA
LED display	LED (yellow)

#### General data

Test isolation voltage	50 V
Surge voltage resistance	2.5 kV
Protection	IP20
Mounting method	pluggable
Dimensions H × W × D	15×5×28 mm

Temperature range	-25...+50 °C
-------------------	--------------

**Output**

Switching time ON/OFF	15/31 µs
Switching voltage	3...30 V DC
Switching current per output	10 mA...6 A
Saturation voltage (across output)	max. 240 mV
Switching frequency	max. 500/50 Hz (ohm./ind.)

**Commercial data**

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1