stay connected

MIRO TRIAC 230VAC/1X400VAC-10A

IN: 253 VAC - OUT: 400 VAC / 10 A

Triac 10 A
230 V AC
Screw plug-in terminals

Link to Product

Illustration

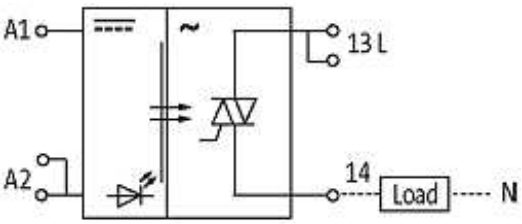

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

stay connected

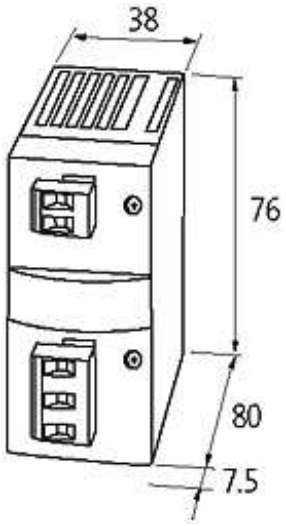

Product may differ from Image

Input	
Voltage range ON	140...253 V AC
Voltage range OFF	0...50 V AC
Control current	approx. 10 mA
Control voltage	230 V AC
LED display	LED (green)
General data	
Housing	Black plastic, flame retardant
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Dimensions H × W × D	76×38×80 mm
Output	
Switching voltage	12...400 V AC
Switching current per output	100 mA/10 A (no derating)
Saturation voltage (across output)	max. 0.15 V AC
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20/1 Hz (resist./ind.)
Surge current	70 A
Commercial data	
country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16