


**Modlink MSDD-set: Frame 4000-68123-000000,**  
insert 4000-68000-0140000 + 4000-68000-1310000

[Link to Product](#)

Illustration



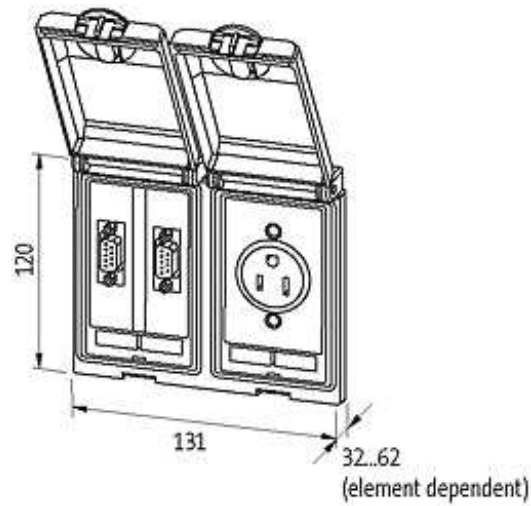

Product may differ from Image

## Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Housing	Zinc die-casting, with surface finishing
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Shielded	yes

### Sockets

Article number	4000-68000-0140000
Operating voltage	max. 250 V AC
Operating current	max. 16 A
Connection	Spring clamp terminals: max. 2 × 2.5 mm <sup>2</sup> (AWG 14)
Mounting depth mounted	approx. 62 mm

### RJ45

Operating voltage	max. 30 V AC/42.4 V DC
Operating current	max. 175 mA
Locking of ports	staple
Specification	CAT6, class EA (ISO/IEC 11801:2002), (EN 50173-1)
Mounting depth mounted	approx. 32 mm
Shielded	yes

### USB

Operating voltage	max. 30 V AC/DC
Operating current	max. 1 A
Locking of ports	Snap In
Specification	2.0/Type 2dB (max. 480 Mbit/s)
Shielded	yes

### Germany (VDE)

Operating voltage	max. 250 V AC
Operating current	max. 16 A
Connection	Spring clamp terminals: max. 2 × 2.5 mm <sup>2</sup> (AWG 14)
Mounting depth mounted	approx. 62 mm

### Commercial data

country of origin	CZ
customs tariff number	85366990
minimum order quantity	1