



Modlink MSDD-set: Frame 4000-68223-0000000,
insert 4000-68000-1210000 + 4000-68000-0140000

[Link to Product](#)

Illustration

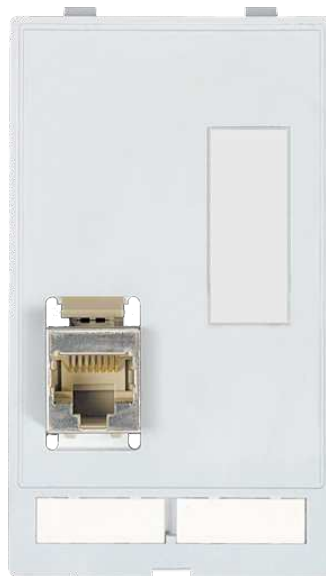

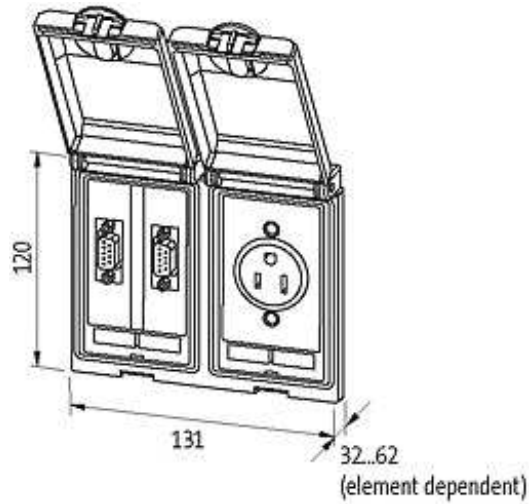

Product may differ from Image

Sockets

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Article number	4000-68000-0140000
Operating voltage	max. 250 V AC
Operating current	max. 16 A
Connection	Spring clamp terminals: max. 2 × 2.5 mm ² (AWG 14)
Mounting depth mounted	approx. 62 mm

Communication inserts

Article number	4000-68000-1210000
Operating voltage	SUB-D: max. 125 V AC/150 V DC; RJ45: max. 48 V AC/DC; RJ12: max. 48 V AC/DC; USB: max. 30 V AC/DC; PS2: max. 30 V AC/DC; DVI: max. 40 V AC
Operating current	SUB-D: max. 3 A; RJ45: max. 1 A; RJ12: max. 1 A; USB: max. 1 A; PS2: max. 1 A; DVI: max. 1.5 A
Connection cross section	SUB-D: max. 0.5 mm ² (AWG 20); PS2: max. 0.22 mm ² (AWG 24)
Locking of ports	SUB-D: UNC 4...40 bolt; RJ45: staple; RJ12: staple; USB: snap-in; PS2: snap-in
Specification	SUB-D: (DIN 41652/IEC 60807-1); RJ45: CAT5e (100 MHz - Mbit/s); USB: 2.0/Type 2dB (max. 480 Mbit/s)
Mounting depth mounted	SUB-D: approx. 32 mm; RJ45: approx. 32 mm; RJ12: approx. 32 mm; USB: approx. 80 mm; PS2: approx. 32 mm

RJ45

Operating voltage	max. 30 V AC/42.4 V DC
Operating current	max. 175 mA
Locking of ports	staple
Specification	CAT6, class EA (ISO/IEC 11801:2002), (EN 50173-1)
Mounting depth mounted	approx. 32 mm
Shielded	yes

Germany (VDE)

Operating voltage	max. 250 V AC
Operating current	max. 16 A
Connection	Spring clamp terminals: max. 2 × 2.5 mm ² (AWG 14)
Mounting depth mounted	approx. 62 mm

Commercial data

country of origin	CZ
customs tariff number	85389099
minimum order quantity	1