


MODL.VARIO insert for coupling housing type B

5-pole M12, female

Modlink Vario
M12 - M12
5-pole, shielded


[Link to Product](#)

Illustration

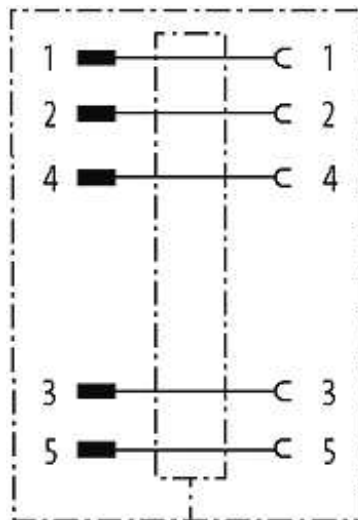

Male

Female



Product may differ from Image

Form

Form

42116

General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Murrelektronik GmbH | Falkenstraße 3, 71570 Oppenweiler | Fon +49 (71 91) 47-0, Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Gasket	FPM
Temperature range	-25...+85 °C
Test isolation voltage	1.5 kV
Technical Data	
Operating voltage	49 V AC/DC
Operating current per contact	max. 4 A
Coding	M12, A-coded
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Compression gland	M12 (SW13)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	CuZn, nickel plated
Commercial data	
country of origin	DE
customs tariff number	85369010
minimum order quantity	1