

MODL.VARIO insert for fixed housing type B


B-code M12, male, shielded

Modlink Vario

Insert - stationary housing


M12 - M12


4-pole, shielded

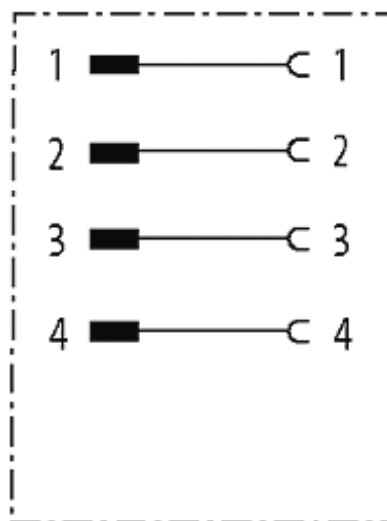[Link to Product](#)**Illustration**

Male

Female



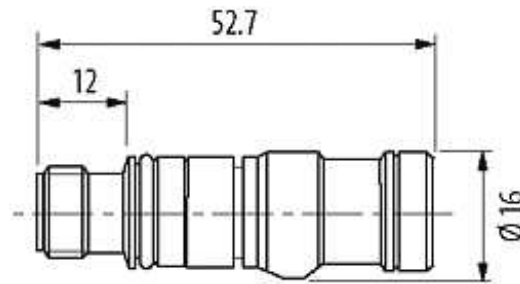

Product may differ from Image

Form

Form 44114

General data

Gasket	FPM
Temperature range	-25...+85 °C
Test isolation voltage	1.5 kV

Technical Data

Operating voltage	49 V AC/DC
Operating current per contact	max. 4 A
Coding	M12, B-coded
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Compression gland	M12 (SW13)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	CuZn, nickel plated

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1