


**MODL.VARIO insert for coupling housing type B**

B-code M12, female, shielded

Modlink Vario



M12 - M12

4-pole, shielded

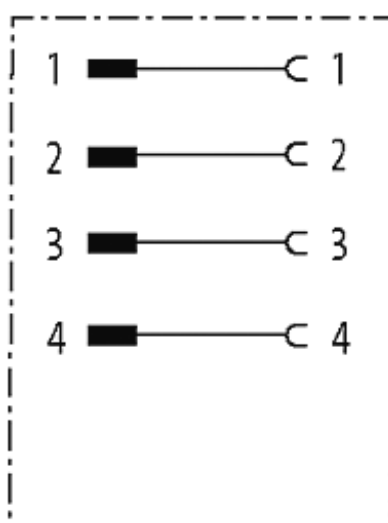[\*\*Link to Product\*\*](#)**Illustration**

Male

Female



Product may differ from Image

**Form**

Form

44116

**General data**

Gasket	FPM
Temperature range	-25...+85 °C
Test isolation voltage	1.5 kV

**Technical Data**

Operating voltage	49 V AC/DC
Operating current per contact	max. 4 A
Coding	M12, B-coded
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Compression gland	M12 (SW13)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	CuZn, nickel plated

**Commercial data**

country of origin	DE
customs tariff number	85369010
minimum order quantity	1