



## MODL.VARIO insert for coupling housing type B

6-pole M12, female, shielded

Modlink Vario  
M12 - M12  
6-pole, shielded

### [Link to Product](#)

#### Illustration

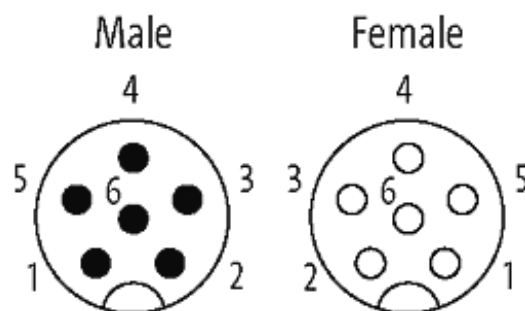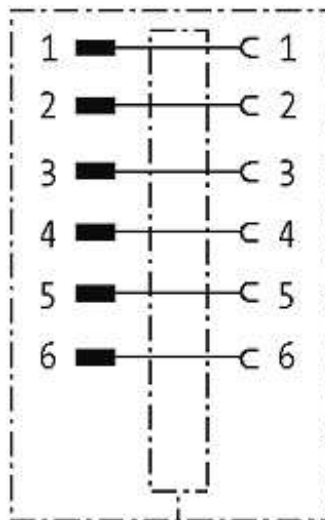

Product may differ from Image

#### Form

Form

46116

**General data**

Gasket	FPM
Temperature range	-25...+85 °C
Test isolation voltage	0.8 kVrms

**Technical Data**

Operating voltage	49 V AC/DC
Operating current per contact	max. 4 A
Coding	M12, A-coded
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Compression gland	M12 (SW13)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	CuZn, nickel plated

**Commercial data**

country of origin	DE
customs tariff number	85369010
minimum order quantity	1