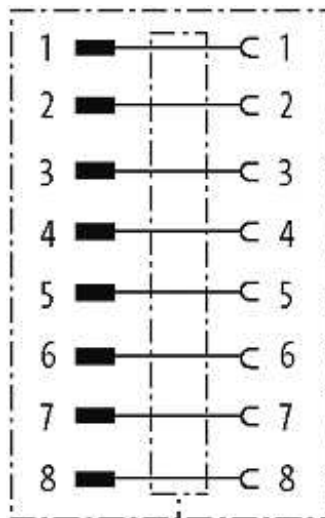



MODL.VARIO insert for fixed housing type B

8-pole M12, male


Modlink Vario
Insert - stationary housing
M12 - M12
8-pole, shielded


[Link to Product](#)**Illustration**

Male



Female



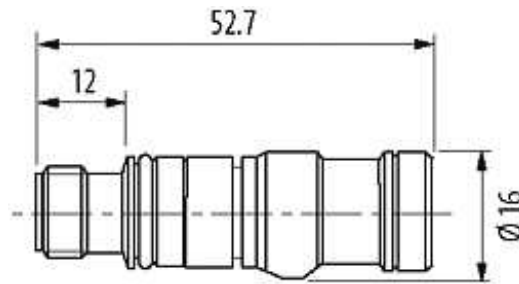

Product may differ from Image

Form

Form 48114

General data

Gasket	FPM
Temperature range	-25...+85 °C
Test isolation voltage	0.8 kVrms

Technical Data

Operating voltage	49 V AC/DC
Operating current per contact	max. 2 A
Coding	M12, A-coded
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Compression gland	M12 (SW13)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	CuZn, nickel plated

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1