


MODL.VARIO insert for coupling housing type B

8-pole M12, female


Modlink Vario
M12 - M12
8-pole, shielded

[Link to Product](#)


Illustration

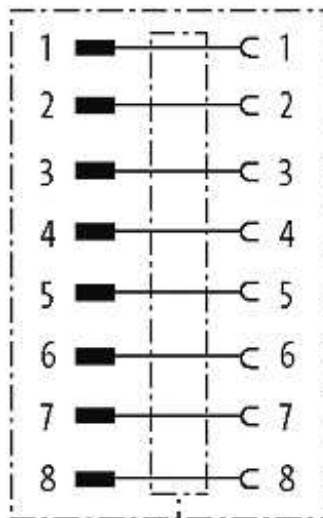

Male



Female



Product may differ from Image

Form

Form

48116

General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Murrelektronik GmbH | Falkenstraße 3, 71570 Oppenweiler | Fon +49 (71 91) 47-0, Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

| | |
|------------------------|--------------|
| Gasket | FPM |
| Temperature range | -25...+85 °C |
| Test isolation voltage | 0.8 kVrms |

Technical Data

| | |
|-------------------------------|---|
| Operating voltage | 49 V AC/DC |
| Operating current per contact | max. 2 A |
| Coding | M12, A-coded |
| Locking of ports | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Compression gland | M12 (SW13) |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Material | CuZn, nickel plated |

Commercial data

| | |
|------------------------|----------|
| country of origin | DE |
| customs tariff number | 85369010 |
| minimum order quantity | 1 |