

MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT, 8 CHANNELS

IN: 24VDC OUT: 5x24V/2ADC 3x24V/6ADC

MICO BASIC 5.2/3.6


8 channels

Current adjustment 5 × 2 A; 3 × 6 A


Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)

[Link to Product](#)

Illustration

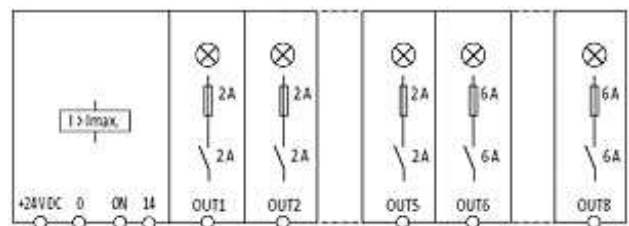

stay connected

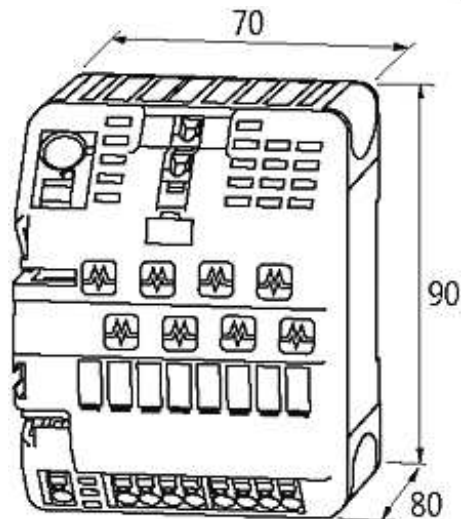

Product may differ from Image

Approvals



General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm ²
Output terminals	per output 1 × 4 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)

Technical Data

Operating voltage	24 V DC (18...30 V DC)
Current adjustment	5 × 2 A; 3 × 6 A
Inrush capacity	max. 20 mF (per channel)
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
Remote start (ON)	10...30 V DC
Impulse length	min. 20 ms

Commercial data

country of origin	CZ
customs tariff number	85363030
minimum order quantity	1