

## MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24VDC OUT: 24V/6ADC


MICO FUSE 24 LED


8 channels

Total current: max. 40 A

### [Link to Product](#)

#### Illustration

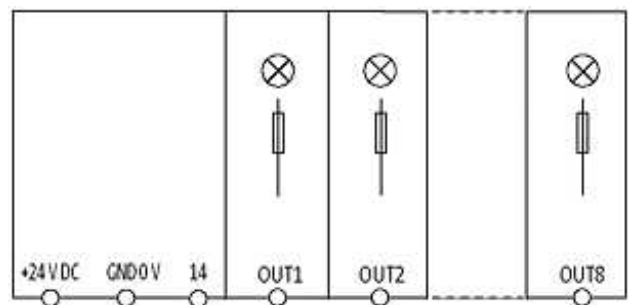

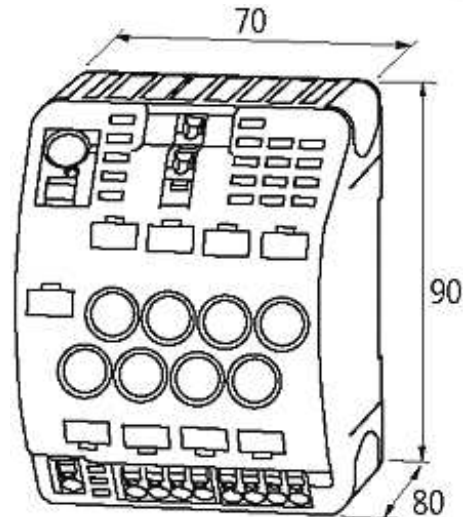

Product may differ from Image

### Approvals



### General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm <sup>2</sup>
Output terminals	1 × 0.5...4 mm <sup>2</sup>
Alarm terminals	2.5 mm <sup>2</sup>
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C

### Technical Data

Operating voltage	24 V DC (18...30 V DC)
Operating current	max. 6 A (40 °C)
Total current	max. 40 A
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON

### Commercial data

country of origin	CZ
customs tariff number	85363030
minimum order quantity	1