


MICO FUSE 250 FUSE HOLDER 5X20MM 8 CHANNELS

IN: 250V AC/DC OUT: 250V AC/DC / 6A AC/DC


MICO FUSE 250

8 channels

Total current: max. 40 A

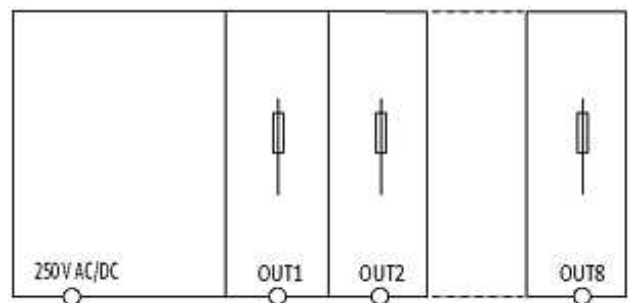[Link to Product](#)**Illustration**

stay connected

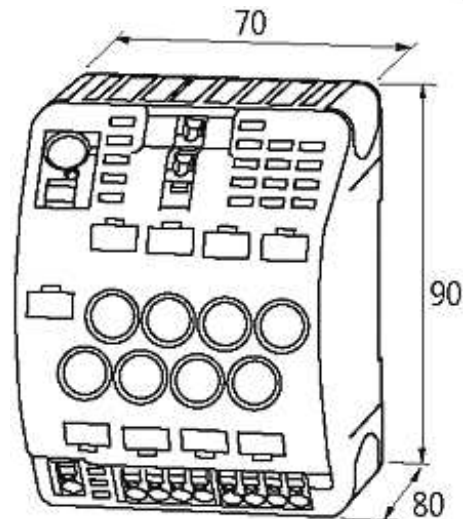

Product may differ from Image

Approvals



General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm ²
Output terminals	1 × 0.5...4 mm ²
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current	max. 6 A (40 °C)
Total current	max. 40 A

Commercial data

country of origin	CZ
customs tariff number	85363030
minimum order quantity	1