

## MICO+ 4.10 ELEC AUX CIRCUIT, 4 CHANNELS


IN: 24VDC OUT: 24V/4-6-8-10ADC

MICO+ 4.10  
4 channels  
Current adjustment 4, 6, 8, 10 A


Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)

### [Link to Product](#)

#### Illustration

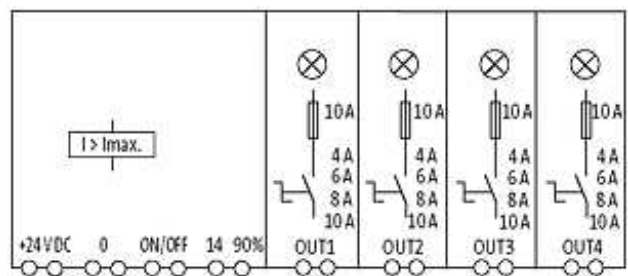


stay connected

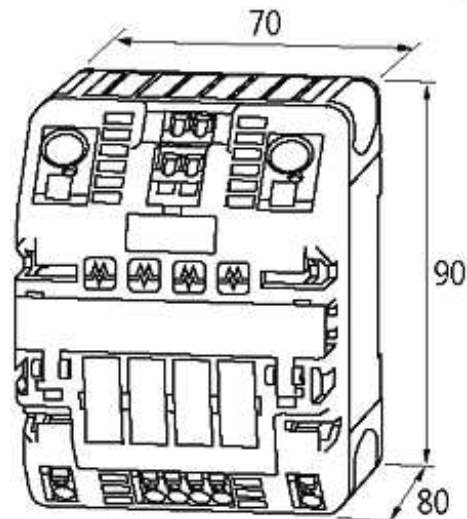

Product may differ from Image

### Approvals

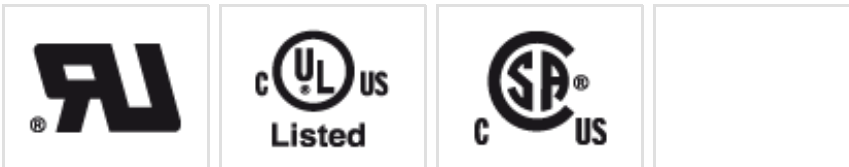

### General data

Connection	Spring clamp terminals
Input terminals	2 × 16 mm <sup>2</sup>
Output terminals	per output 2 × 1.5 mm <sup>2</sup>
Alarm terminals	2.5 mm <sup>2</sup>
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)

### Technical Data

Operating voltage	24 V DC (18...30 V DC)
Current adjustment	4 A, 6 A, 8 A, 10 A, by countersunk rotary switch, sealed
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
Inrush capacity	max. 20 mF (per channel)
Remote start (ON)	10...30 V DC
Remote start (OFF)	10...30 V DC
Impulse length	min. 20 ms
Early warning (90%)	max. 20 mA; high: one channel over 90%; low: all channels under 90%

### Commercial data

country of origin	CZ
customs tariff number	85363010
minimum order quantity	1