

MICO+ 48V DC 4.6 LOAD CIRCUIT MONITORING, 4-CANALS

IN: 48VDC OUT: 48V/1-2-4-6ADC

MICO+ 48 V DC 4.6


4 channels


Current adjustment 1, 2, 4, 6 A

Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)

[Link to Product](#)

Illustration

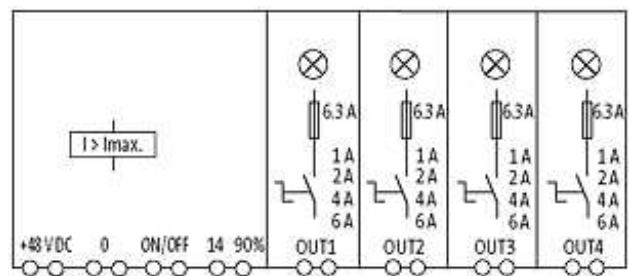

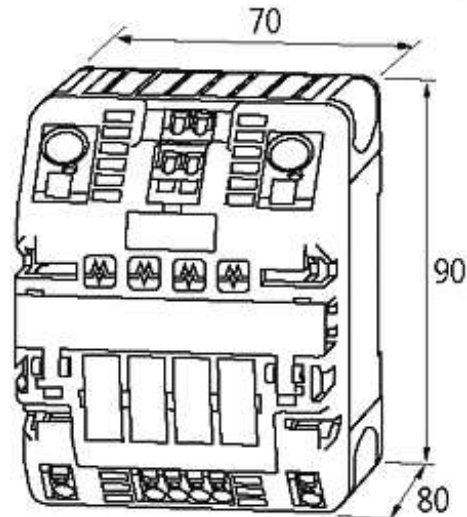

Product may differ from Image

General data

Connection	Spring clamp terminals
Input terminals	2 × 16 mm ²
Output terminals	per output 2 × 1.5 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)

Technical Data

Operating voltage	48 V DC (36...60 V DC)
Current adjustment	1 A, 2 A, 4 A, 6 A, by countersunk rotary switch, sealed
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
Inrush capacity	max. 5 mF (per channel)
Remote start (ON)	20...60 V DC
Remote start (OFF)	20...60 V DC
Impulse length	min. 20 ms
Early warning (90%)	max. 20 mA; high: one channel over 90%; low: all channels under 90%

Commercial data

country of origin	CZ
customs tariff number	85363010
minimum order quantity	1