

**Rotary Sensor
Multi-Turn Geared
Heavy Duty
Potentiometer**

Series IGP



Special features




- angular range - 3 turns (~1,080°), 5 turns (~1,800°), or 10 turns (~3,600°)
- robust construction - with 10 mm shaft and high allowable loads
- very good linearity - 0.1 %
- excellent repeatability - 0.002 %
- very long life - typically 100 million movements
- sealed to IP67

The IGP series multiple-turn geared potentiometer offer an analog voltage output signal that is proportional to the angle, over the specified number of turns.

This heavy-duty sensor is designed to measure angular displacement under the most difficult of environmental conditions.

The potentiometer section is based on Novotechnik's high precision P6500 series, while the mechanism is comprised of precision gears, mounted with stainless steel ball bearings.

The sensor is sealed to IP67 and the single-stage gearing is exceptionally backlash-free. Heavy-duty bearings allow for high axial loading on the shaft, allowing gears, or even chain drives, to be mounted directly to the sensor shaft.

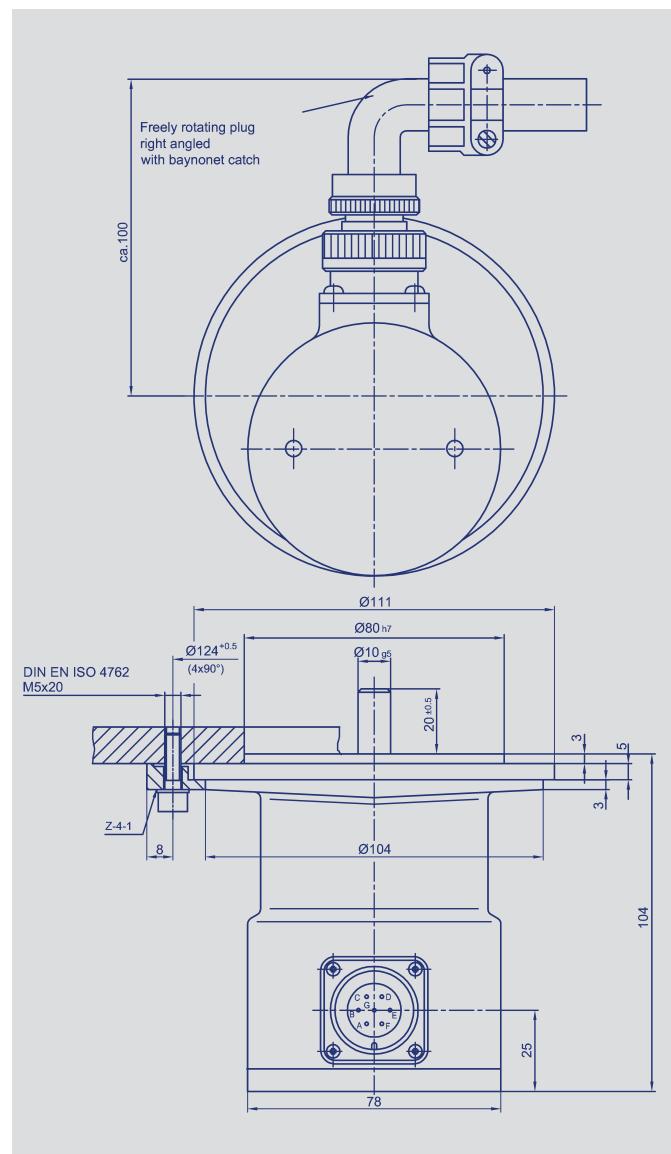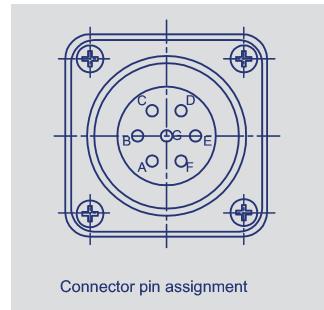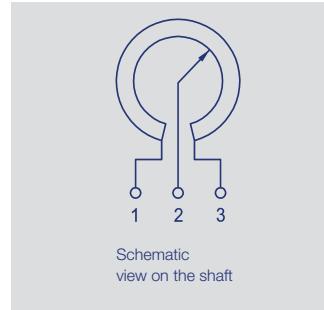

Description

Case	varnished aluminium
Shaft	stainless steel
Bearings	stainless ball bearings
Reduction gearing	single-stage low-backlash
Resistance element	conductive plastic
Wiper assembly	precious metal multi-finger wiper
Mounting	any optional orientation
Electrical Connections	7pin all-metal plug and socket, freely rotatable, 90° right-angled, protection class IP67, bayonet-type

Novotechnik U.S., Inc.
155 Northboro Road
Southborough, MA 01772

Phone 508 485 2244
Fax 508 485 2430
info@novotechnik.com
www.novotechnik.com

© 11/2007
Subject to change.

Type designations	IGP-3-P-6501-A502	IGP-5-P-6501-A502	IGP-10-P-6501-A502
Mechanical Data			
Dimensions	see drawing		
Mounting	with 4 clamps Z-4-1		
Mechanical travel	360, continuos		°
Permitted shaft loading (axial and radial) static or dynamic force	300		N
Starting torque	< 10		Ncm
Weight	approx. 1300		g
Reduction ratio	3.11:1	5.19:1	10.77:1
Electrical Data			
Actual electrical travel	1095 + 15	1830 + 20	3800 + 45
Nominal resistance	5		kΩ
Resistance tolerance	±20		%
Independent linearity	±0.1 (0.05 on request)		%
Repeatability	typ. 0.002		%
Max. permissible applied voltage	42		V
Max. wiper current in case of malfunction	10		mA
Recommended operating wiper current	≤ 1		μA
Effective temperature coefficient of the output-to-applied voltage ratio	typ. 5		ppm/K
Insulation resistance (500 VDC)	≥ 10		MΩ
Dielectric strength (500 VAC, 50 Hz)	≤ 100		μA
Environmental Data			
Temperature range	-40...+100		°C
Vibration	5...2000 Amax = 0.75 amax = 20		Hz mm g
Shock	50 11		g ms
Life	100 x 10 ⁶		movements
Protection class	IP67 (DIN 400 50 / IEC 529)		

Order designations

Type	P/N	Ratio
IGP-3-P-6501-A502	009121	Reduction 3:1
IGP-5-P-6501-A502	009122	Reduction 5:1
IGP-10-P-6501-A502	009123	Reduction 10:1

Included in delivery

4 mounting clamps Z-4-1,
1 right-angle plug Cannon Nr.
CA 08 COM-E16S-1S-B,
1 anti-kink sleeve

Recommended accessories

Spring operated backlash free
coupling Z-110-G10.
MAP process control indicator
with display.
MUP/MUK signal conditioners
for standardized voltage and
current output signals

Important

All the values given in this
data sheet for linearity, lifetime
and temperature coefficient in
the voltage dividing mode are
quoted for the device ope-
rating with the wiper voltage
driving on operational amplifier
working as a voltage follower,
where virtually no load is
applied to the wiper (I <= 1 μA)