



NOVOHALL Rotary Sensor non-contacting

Series RSC-2800

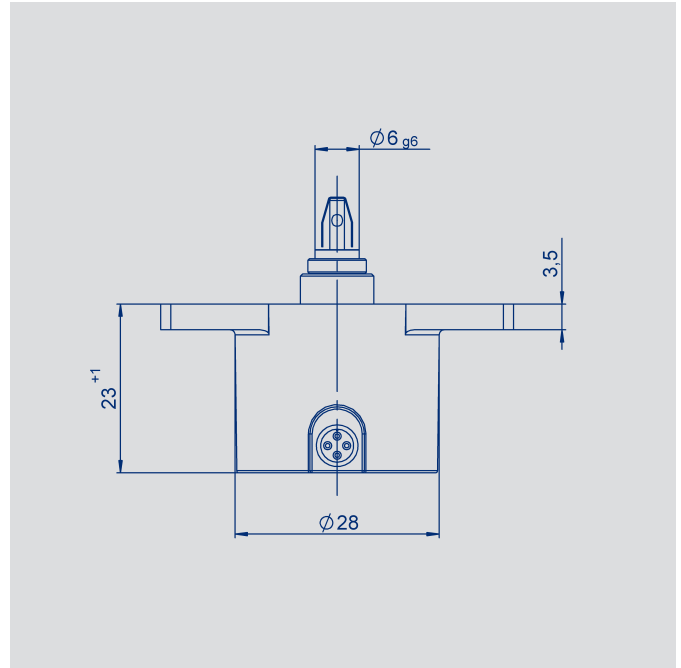

Special features

- Non-contacting, magnetic technology
- Measuring range up to 360°
- Available with push-on coupling or marked shaft
- Simple mounting
- Protection class IP54, IP65, IP67
- Long life
- Very small hysteresis
- Resolution up to 14 bit
- Linearity $\leq \pm 0.5\%$
- Single output and redundant versions
- European E1 approved

Applications

- Mechanical engineering
 - Textile machines
 - Packaging machines
 - Sheet metal and wire processing machines
- Automation technology
- Medical appliances
- Mobile machinery
 - Industrial trucks
 - Construction machines
 - Agricultural and forestry machines

The **RSC-2800 sensor** utilizes a contactless magnetic measurement technology to determine the measured angle. Unlike conventional Hall sensors, the orientation of the magnetic field is measured. The position information corresponding to the angular position is transmitted via a variety of analog and digital interfaces.



The housing is made of a special high grade temperature-resistant plastic material. Elongated slots allow simplicity in mounting together with ease of mechanical adjustment.

Three shaft options are available, including a push-on coupling option that ensures fast and simple installation.



Contents

Mechanical data	3
Output characteristics	4
<hr/>	
Analog versions for industrial applications	
Technical data	5
Ordering code	6
Analog versions for mobile applications	
Technical data	7
Ordering code	8
<hr/>	
Digital versions	
Technical data SSI	9
Technical data Incremental	10
Technical data SPI	11
Ordering code	12
<hr/>	
Accessories	
M12-Connector system	13
Signal processing	14

Mechanical Data

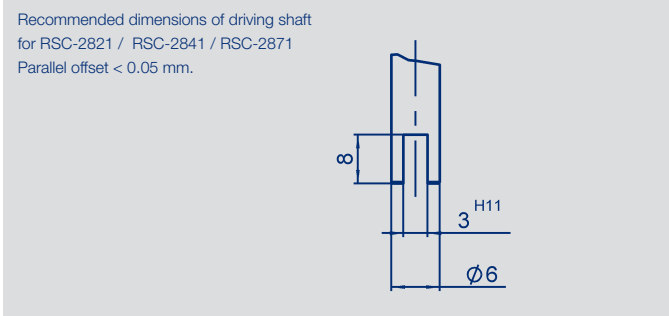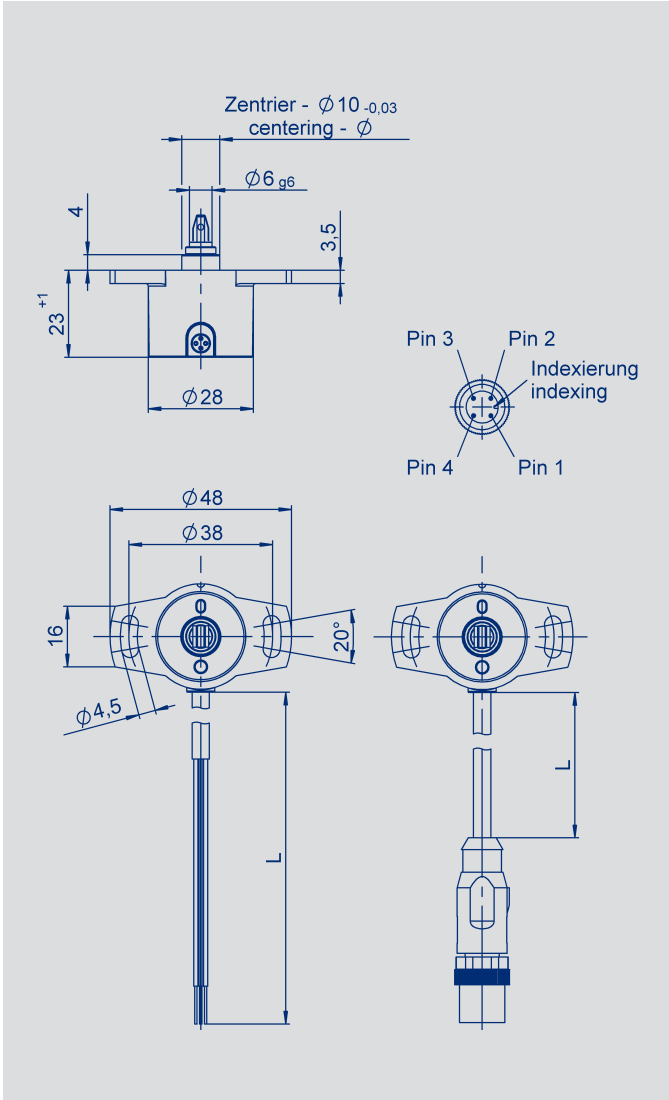


Description		
Housing	High grade, temperature-resistant plastic, PPS-GF40	
Shaft	Stainless steel, X8CrNiS18-9 1.4305	
Bearing	Sintered bronze bushing	
Electrical connections	Cable 4 x 0.5 mm², AWG 20, TPE insulated, shielded (voltage / current) Cable 4 x 2 x 0.25 mm², AWG 24, TPE insulated, shielded (SSI) Cable 5 x 0.14 mm², AWG 26, PUR insulated, shielded (SPI) Connector M12x1, 4-pin / 8-pin on cable L = 0,15 m	
Mechanical Data		
Dimensions	see dimension drawing	
Mounting	2 screws M4 and washers	
Starting torque of mounting screws with washer at housing flange	180	Ncm
Mechanical travel	360 continuous	°
Permitted shaft load (axial / radial) static or dynamic	20	N
Torque	0.15 (IP54), 0.5 (IP65); 1.0 (IP67)	Ncm
Maximum operational speed	800	min ⁻¹
Weight	ca. 50	g
Vibration (IEC 68000-2-6)	5 ... 2000 Amax = 0.75 amax = 20	Hz mm g
Shock (IEC 68000-2-27)	50 (6 ms)	g
Protection class (DIN EN 60529)	IP54 / IP65 / IP67	
Operating Temperature	-40 ... +85 (-25 ... +85 with M12 connector)	
Life	> 50 x 10 ⁶ (mechanically)	°C movem.

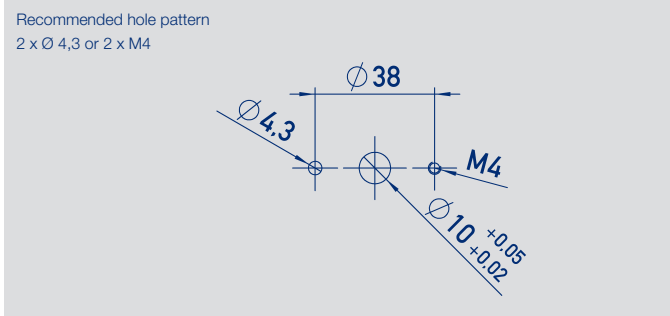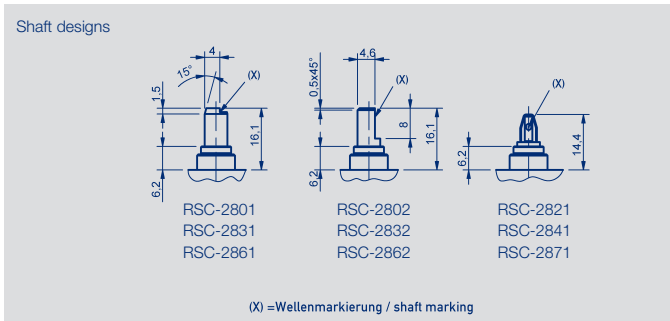


Output Characteristics


One-channel, cw

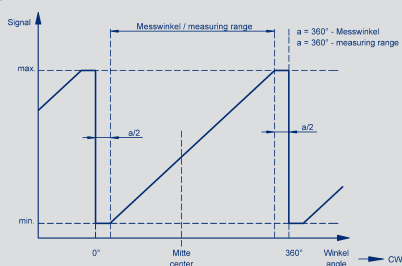


One-channel, ccw

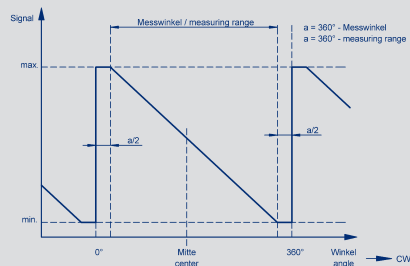


Two channels, crossed output characteristics, channels 1 cw

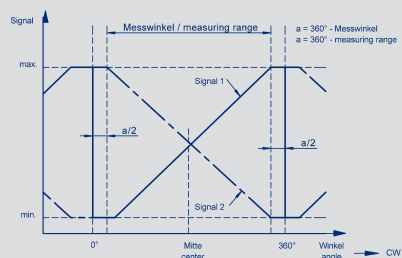


On request: Two channels, signal 2 = 0.5 x signal 1

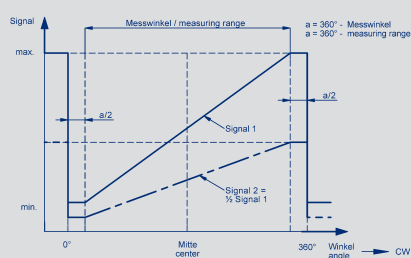


On request: Trapezoid output characteristic




On request: Different gradients



On request: 2 offset output characteristics



On request: Parabolic output characteristic




Technical Data Analog Versions - Voltage - Current for Industrial Applications

Technical Data - Versions for Industrial Applications

Design optimized for use in machine and plant applications. High reliability. Simple interface to PLC. Many options.

Optimized for use in machine and plant applications. High reliability. Simple increased to FES. Many options.

Type Designations	RSC - 28 _ _ _ _ - 2 _ _ _ _ ratiometric	RSC - 28 _ _ _ _ - 1 1 _ _ _ _ analog voltage	RSC - 28 _ _ _ _ - 1 2 _ _ _ _ analog current	
Electrical Data				
Output signal	ratiometric to supply voltage 0.25...4.75 VDC 0.5...4.5 VDC (load ≥1 kΩ)	0.1 ... 10 VDC (load ≥10 kΩ)	4 ... 20 mA (burden ≤500 Ω)	
Number of channels	1 or 2	1	1	
Update rate	typ. 5			kHz
Resolution	12			bit
Measuring range	0 to 30° up to 0 to 360, in 10° steps			°
Independent linearity	≤ 0.5			± % FS
Repeatability	≤ 0.1			°
Hysteresis	< 0.1			°
Temperature error at measuring range 30 up to 170°	≤ 0.625	≤ 0.94	≤ 0.94	± % FS
Temperature error at measuring range 180 up to 360°	≤ 0.31	≤ 0.5	≤ 0.5	± % FS
Supply voltage Ub	5 (4.5 ... 5.5)	24 (18 ... 30)	24 (18 ... 30)	VDC
Current consumption (w/o load)	typical 15 (typ. 8 on request) per channel			mA
Reverse voltage	yes, supply lines			
Short circuit protection	yes (vs. GND and supply voltage)			
Insulation resistance (500 VDC)	≥ 10			MΩ
Cross-section cable	AWG 26, 0.14 (AWG 20, 0.5)*			mm²
Environmental Data				
MTTF (DIN EN ISO 13849-1 parts count method, w/o load)	356 (single) 210 (per channel) partly redundant	107	105	years years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us			
EMC compatibility	EN 61000-4-2 electrostatic discharges (ESD) 4 kV, 8 kV EN 61000-4-3 electromagnetic fields 10 V/m EN 61000-4-4 electrical fast transients (burst) 1 kV EN 61000-4-6 conducted disturbances, induced by RF fields 10 V eff. EN 61000-4-8 power frequency magnetic fields 3 A/m EN 55011/EN 55022/A1 radiated disturbances class B			




*) The cross-sections of the lead wires will be increased to 0.5 mm².
The changeover is carried out depending on model type and starts from Q1-2016.
For questions, please call your local distributor or our hotline on +49 711 4489 250.

Connection assignment

Signal	Cable code 2 _ _	Connector M12 code 501
GND	BN	pin 3
Supply voltage U_b	GN	pin 1
Output 1	WH	pin 2
Not assigned / output 2	YE	pin 4

Cable shielding connect to GND.



When the shaft marking points towards the cable outlet, the sensor is located near the electrical center position.

Ordering code

Analog Versions

- Voltage

- Current

for Industrial Applications

Ordering specifications

- Preferred types printed in bold:
- Delivery time up to 25 pcs. within 10 working days
 - best low-volume pricing

Supply voltage U_b
1: 24 V (18 ... 30 V)
2: 5 V (4.5 ... 5.5 V)

Output signal - supply voltage = 24 V
1: 0.1 ... 10 V
2: 4 ... 20 mA

Output signal - supply voltage = 5 V
1: 0.25 ... 4.75 V ratiometric to supply voltage (5 ... 95 %)
2: 0.5 ... 4.5 V ratiometric to supply voltage (10 ... 90 %)

Output characteristics
1: rising cw
2: rising ccw
3: crossed output characteristics, channel 1 rising / channel 2 falling cw
Other output characteristics on request

Electrical connection
201: Cable 4-pole, L = 0.5 m shielded
202: Cable 4-pole, L = 1 m shielded
206: Cable 4-pole, L = 3 m shielded
210: Cable 4-pole, L = 5 m shielded
220: Cable 4-pole, L = 10 m shielded
501: Connector M12, 4-pin, with cable, L = 0.15 m, shielded
Cable versions and assembled connectors on request

R S C - 2 8 3 2 - 6 3 6 - 2 1 1 - 2 0 2

Series

Measuring range
03: measuring range 0° ... 30° min.
...
06, 12, 18, 24, 36
...
36: measuring range 0° ... 360° max.
Other angles on request

Numbers of channels
6: single output 1 x supply voltage / 1 x output
7: partly redundant 1 x supply voltage / 2 x output (only at supply voltage = 5 V)


Mechanical version
2801: 6 mm shaft with marking, IP54*
2831: 6 mm,shaft with marking, IP65*
2861: 6 mm shaft with marking, IP67*
2802: 6 mm shaft with flattening, IP54
2832: 6 mm shaft with flattening, IP65
2862: 6 mm shaft with flattening, IP67
2821: push-on coupling, IP54
2841: push-on coupling, IP65
2871: push-on coupling, IP67
Other shaft designs on request

*) Not recommended for new designs

Technical Data Analog Versions - Voltage for mobile Applications

Technical Data - Versions for Mobile Applications		
These versions are optimized for the high requirements in mobile applications. Tested to the highest requirements as ISO-pulse and high interferences to ECE-R10 (E1)		
Type Designations	RSC - 28 _ _ - _ _ - 2 _ _ - _ _ ratiometric	
Electrical Data		
Output Signal	ratiometric to supply voltage 0.25 ... 4.75 VDC 0.5 ... 4.5 VDC (load $\geq 1 \text{ k}\Omega$)	
Number of channels	1	
Update rate	typ. 5	kHz
Resolution	12	bit
Measuring range	0 to 30° up to 0 to 360, in 10° steps	°
Independent linearity	≤ 0.5	$\pm \% \text{ FS}$
Repeatability	≤ 0.1	°
Hysteresis	≤ 0.1	°
Temperature error at measuring range 30 up to 170°	≤ 0.625	$\pm \% \text{ FS}$
Temperature error at measuring range 180 up to 360°	≤ 0.31	$\pm \% \text{ FS}$
Supply voltage U_b	5 (4.5 ... 5.5)	VDC
Current consumption (w/o load)	typical 15 (typ. 8 on request) per channel	mA
Reverse voltage	yes, supply lines	
Short circuit protection	yes (vs. GND and supply)	
Insulation resistance (500 VDC)	≥ 10	M Ω
Cross-section cable	AWG 20, 0.5	mm ²
Environmental Data		
MTTF (DIN EN ISO 13849-1 parts count method, w/o load)	356	years
Functional Safety	If you need assistance in using our products in safety-related systems, please contact us	
EMC compatibility	Interference emission and immunity to ECE-R10 (E1) (ISO 11452-2, ISO 11452-5, CISPR 25, ISO 7637-2)	

Connection assignment	
Signal	Cable code 25 _
GND	BN
Supply voltage U_b	GN
Output 1	WH
Not assigned	YE



When the shaft marking points towards the cable outlet, the sensor is located near the electrical center position.

Ordering Code
Analog Versions
- Voltage
for mobile Applications

Ordering specifications

Preferred types printed in bold:

- Delivery time up to 25 pcs. within 10 working days
- best low-volume pricing

Supply voltage U_b

2: Supply voltage = 5 V (4.5 ... 5.5 V)

Output signal

1: 0.25 ... 4.75 V ratiometric to supply voltage (5 ... 95 %)

2: 0.5 ... 4.5 V ratiometric to supply voltage (10 ... 90 %)

Output characteristics

1: rising cw

2: rising ccw

Other output characteristics on request

Electrical connection

252: Cable 4-pole, L = 1 m unshielded

256: Cable 4-pole, L = 3 m unshielded

Cable versions and assembled connectors on request

R S C - 2 8 3 2 - 6 3 6 - 2 1 1 - 2 5 2

Measuring range

03: measuring range 0° ... 30° min.

...

06, 12, 18, 24, 36

...

36: measuring range 0° ... 360° max.

Other angles on request

Numbers of channels

6: single output

Series

Mechanical version

2801: 6 mm shaft with marking, IP54*

2831: 6 mm, shaft with marking, IP65*

2861: 6 mm shaft with marking, IP67*

2802: 6 mm shaft with flattening, IP54

2832: 6 mm shaft with flattening, IP65

2862: 6 mm shaft with flattening, IP67

2821: push-on coupling, IP54

2841: push-on coupling, IP65

2871: push-on coupling, IP67



Other shaft designs on request

Other smart designs on request


*) Not recommended for new designs

Technical Data SSI interface

Type Designations	RSC - 28 _ _ - 212 - 41 _ - _ _ _ supply voltage 5 VDC	RSC - 28 _ _ - 212 - 44 _ - _ _ _ supply voltage 24 VDC	
Electrical Data			
Protocol	SSI 13 bit (12 bit data + 1 stop bit)		
Inputs	RS422-compatible, CLK lines electrically isolated via optocouplers		
Monoflop time (tm)	16		µs
Coding	Gray code		
Update rate (internal)	2 000		kHz
Resolution across 360°	12		bit
Measuring range	360		°
Independent linearity	typ. 0.5		±% FS
Repeatability	≤ 0,2		°
Hysteresis	0.7 (lower hysteresis on request)		°
Temperature error	0.375		±% FS
Supply voltage Ub	5 (4.5 ... 5.5)	24 (18 ... 30)	VDC
Current consumption (w/o load)	typ. 27	typ. 10	mA
Reverse voltage	yes, supply lines		
Short circuit protection	yes (output vs. GND and supply voltage)	yes (output vs. GND)	
Ohmic load at outputs	≥ 120		Ω
Max. clock rate	1		MHz
Insulation resistance (500 VDC)	≥ 10		MΩ
Cross-section cable	AWG 24, 0.25		mm²
Environmental Data			
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	148	104	years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us		
EMC compatibility	EN 61000-4-2 electrostatic discharges (ESD) 4 kV, 8 kV EN 61000-4-3 electromagnetic fields 10 V/m EN 61000-4-4 electrical fast transients (Burst) 1 kV EN 61000-4-6 conducted disturbances, induced by RF fields 10 V eff. EN 55016-2-3 radiated disturbances class B		

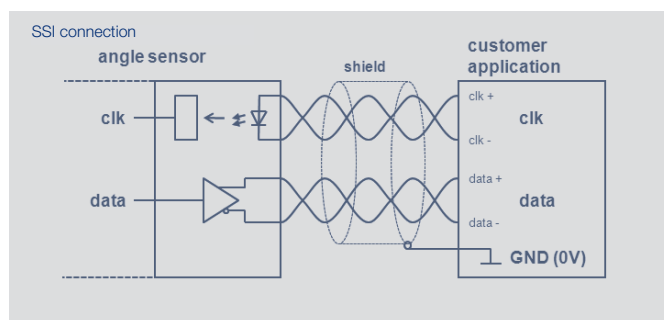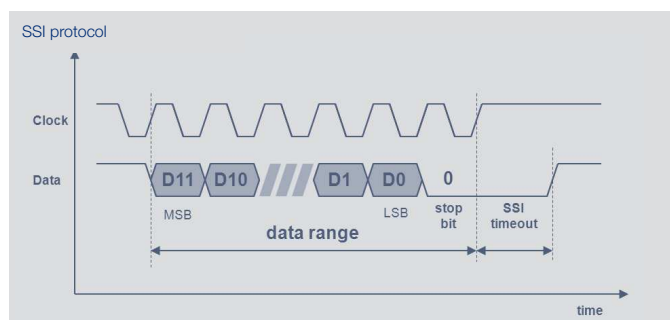



Connection assignment		
Signal	Cable code 4 _ _	Connector M12 code 531
Supply voltage Ub	WH	pin 1
GND	BN	pin 2
Signal output SSI Data+	PK	pin 6
Signal output SSI Data-	GY	pin 5
Clock input SSI Clk+	YE	pin 4
Clock input SSI Clk-	GN	pin 3
Not assigned	BU	pin 7
Not assigned	RD	pin 8



When the shaft marking points towards the cable outlet, the sensor is located near the electrical center position.


Technical Data Incremental interface

Type Designations	RSC - 28 _ _ _ - 2 _ _ _ - 515 - _ _ _ _ supply voltage 5 VDC	RSC - 28 _ _ _ - 2 _ _ _ - 535 - _ _ _ _ supply voltage 24 VDC, TTL	RSC - 28 _ _ _ - 2 _ _ _ - 539 - _ _ _ _ supply voltage 24 VDC, HTL		
Electrical Data					
Outputs	A+ / A- B+ / B- Z+ / Z-				
Level	RS-422, TTL-compatible	RS-422, TTL-compatible	HTL-compatible, push-pull		
Length Z-pulse	distance between 2 edges A / B				
Pulses per revolution	1024	512	256	128	ppr
Counts per revolution (after quadrature)	4096	2048	1024	512	
Minimum edge separation	8				µs
Ohmic load at outputs	≥ 120 per channel A / B / Z				Ω
Minimum input frequency of counter input	min. 32				kHz
Measuring range	360				°
Independent linearity	typ. 0.5				± % FS
Repeatability	≤ 0.2				°
Hysteresis	≤ 0.7 (lower hysteresis on request)				°
Temperature error	≤ 0.375				± % FS
Supply voltage Ub	5 (4.5 ... 5.5)		24 (18 ... 30)	24 (18 ...30)	VDC
Current consumption (w/o load)	typ. 20		typ. 10	typ. 10	mA
Reverse voltage	yes, supply lines				
Short circuit protection	yes (ouputs vs. GND and supply voltage)		yes (outputs vs. GND)		yes (outputs vs. GND and supply voltage)
Insulation resistance (500 VDC)	≥ 10				MΩ
Cross-section cable	AWG 24, 0,25				mm²
Environmental Data					
MTTF (DIN EN ISO 13849-1 parts count method, w/o load)	246		126	126	years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us				
EMC compatibility	EN 61000-4-2 electrostatic discharges (ESD) 4 kV, 8 kV EN 61000-4-3 electromagnetic fields 10 V/m EN 61000-4-4 electrical fast transients (Burst) 1 kV EN 61000-4-6 conducted disturbances, induced by RF fields 10 V eff. EN 55016-2-3 radiated disturbances class B				

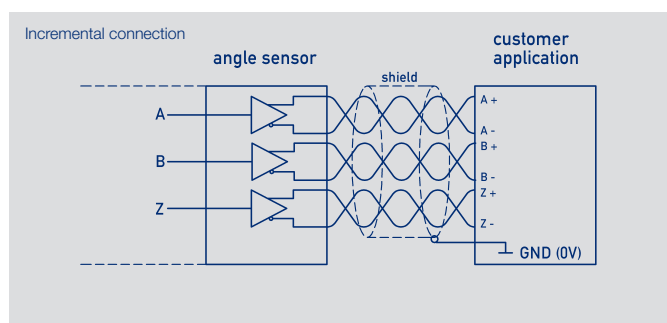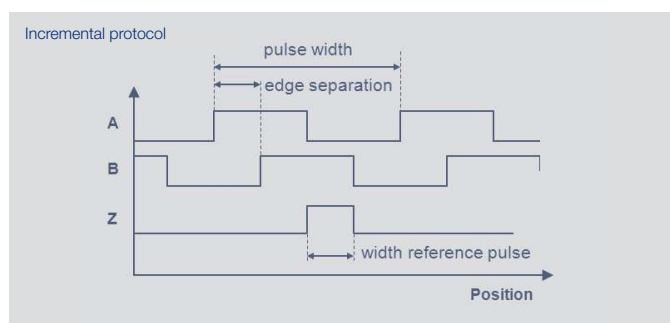


Connection assignment

Signal	Cable code 4 _ _	Connector M12 code 531
Supply voltage U _b	WH	pin 1
GND	BN	pin 2
A+	YE	pin 4
A-	GN	pin 3
B+	PK	pin 6
B-	GY	pin 5
Z+	BU	pin 7
Z-	RD	pin 8



When the shaft marking is pointing away from the cable outlet, the sensor is located at the reference pulse (Z).

CE

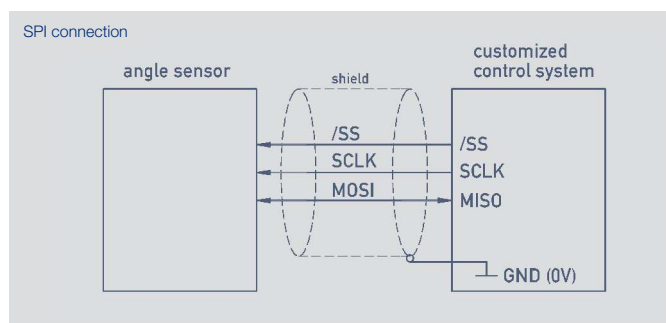

Page 11

Ordering code
Digitale Varianten
- SSI
- Inkremental
- SPI

Ordering specifications

- Preferred types printed in bold:
- Delivery time up to 25 pcs. within 10 working days
 - Best low volume pricing

Interface

4: Synchronous-Serial Interface (SSI)
5: Incremental Interface A / B / Z
8: Serial Peripheral Interface (SPI)

Interface parameters for SSI Interface

11: 5 V (4.5...5.5 V) supply voltage, output RS422 comp., Gray code, rising cw
12: 5 V (4.5...5.5 V) supply voltage, output RS422 comp., Gray code, rising ccw
41: 24 V (18...30 V) supply voltage, output RS422 comp., Gray code, rising cw
42: 24 V (18...30 V) supply voltage, output RS422 comp., Gray code, rising ccw

Interface parameters for Incremental Interface

15: 5 V (4.5...5.5 V) supply voltage, output RS422, TTL-compatible
35: 24 V (18...30 V) supply voltage, output RS422, TTL-compatible
39: 24 V (18...30 V) supply voltage, output RS422, HTL-compatible, push-pull
On request: high side and low side outputs
UVW signals instead of ABZ signals for motor commutation
Absolute position at Power On (Power on burst)

Interface parameters for SPI Interface

31: 5 V (4.5 V...5.5 V) supply, binary code, rising cw

Electrical connection

SPI:
302: Cable 5-pole, L = 1 m, shielded,

SSI:
432: Cable 8-pole, L = 1 m, shielded
436: Cable 8-pole, L = 3 m, shielded
440: Cable 8-pole, L = 5 m, shielded
450: Cable 8-pole, L = 10 m, shielded,
531: Connector M12x1, 8-pin, with cable, L = 0.15 m, shielded
Cable versions and assembled connectors on request.

R S C - 2 8 3 2 - 2 1 2 - 4 1 1 - 4 3 2

Series

Resolution SSI Interface

12: 12 bit
Other resolutions on request

Resolution Incremental Interface

12: 1024 ppr - 4096 counts (after quadrature)
11: 512 ppr - 2048 counts (after quadrature)
10: 256 ppr - 1024 counts (after quadrature)
09: 128 ppr - 512 counts (after quadrature)
Other resolutions on request

Resolution SPI Interface

14: 14 bit

Interface


2: Digital Interface

Mechanical version

2802: 6 mm-shaft with flattening, IP54
2832: 6 mm-shaft with flattening, IP65
2862: 6 mm-shaft with flattening, IP67
2821: push-on-coupling, IP54
2841: push-on-coupling, IP65
2871: push-on-coupling, IP67
Other shaft versions on request

Accessories

Connector system M12



Pin assignment

1 = brown

2 = white

3 = blue

4 = black

IP67

UL

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Connector housing

Plastic PA


Cable sheath

PUR; Ø = max. 6 mm, -25 °C...+80 °C (moved)
-50 °C...+80 °C (fixed)

Wires

PP, 0.34 mm²

Length	Type	P/N
2 m	EEM 33-32	005600
5 m	EEM 33-62	005609
10 m	EEM 33-97	005650



Pin assignment

IP67

M12x1 Mating female connector, 4-pin, straight, A-coded, with coupling nut, screw termination, IP67, not shielded

Connector housing


Plastic PBT
-25 °C...+90 °C

For wire gauge

6...8 mm, max. 0.75 mm²

Type

EEM 33-88, P/N 005633



Pin assignment

1 = white

2 = brown

3 = green

4 = yellow

5 = grey

6 = pink

7 = blue

8 = red

IP67

UL

M12x1 Mating female connector, 8-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Connector housing

Plastic PA

Cable sheath

PUR; Ø = max. 8 mm, -25 °C...+80 °C (moved)
-50 °C...+80 °C (fixed)

Wires


PP, 0.25 mm²

Length	Type	P/N
2 m	EEM 33-86	005629
5 m	EEM 33-90	005635
10 m	EEM 33-92	005637

Multifunctional Measuring Device with Display Series MAP-4000

Novotechnik U.S., Inc.
155 Northboro Road
Southborough, MA 01772
Phone 508 485 2244
Fax 508 485 2430
info@novotechnik.com
www.novotechnik.com

© 07/2016
Subject to changes.



Special features

- Supply voltage 10 ... 30 VDC, 80 ... 250 V DC or AC
- high accuracy
- direct connection of potentiometric and standardized signals
- adjustable supply voltage for sensors 5 ... 24 V
- Temperature coefficient 100 ppm/K
- optional RS 232, RS 485, analog output, limited switch
- complete data see separate [data sheet MAP-4000](#)

Ordering specifications

Number comparator relays

0: none
2: 2 relays
4: 4 relays

Analog output

0: no analog output
1: analog output present

Interface

0: no interface
1: RS 232
2: RS 485

M A P - 4 0 1 0 - 0 0 0 - 1 0 1

Series

Supply voltage U_b
00: 10 ... 30 V AC/DC
10: 80 ... 250 V AC

Adjustable supply voltage (5 ... 24 V / max. 1.2 W)
1: with supply voltage

Display colour
1: red

Data storage (only with interface)

0: not storage
1: RTC storage
2: FAST storage