


Features

- Dummy
- DIN rail mounting



Function

The Zener barrier is an empty housing. This device will be used as a dummy, to reserve place and wiring for future expansions.

Assembly

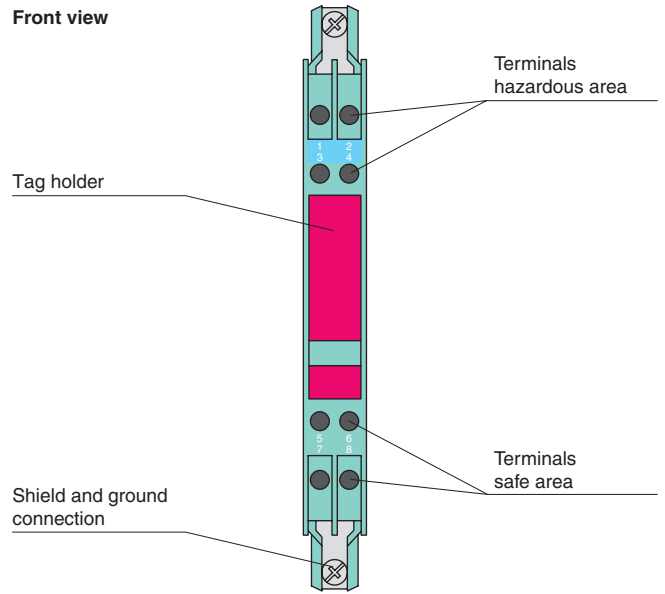

Connection

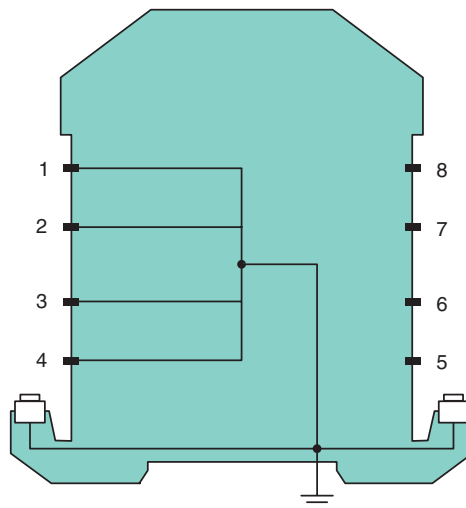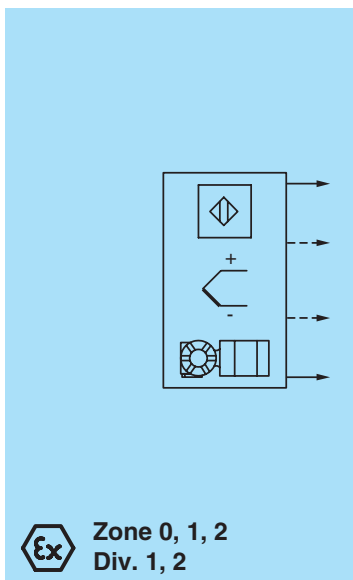

Release date 2009-11-23 14:03 Date of issue 2009-11-23 071818_ENG.xml

Hazardous area connection	
Connection	terminals 1, 2, 3, 4
Safe area connection	
Connection	terminals 5, 6, 7, 8
Conformity	
Protection degree	IEC 60529
Ambient conditions	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Storage temperature	-25 ... 70 °C (248 ... 343 K)
Relative humidity	max. 75 % , without moisture condensation
Mechanical specifications	
Protection degree	IP20
Connection	self-opening connection terminals, max. core cross-section 2 x 2.5 mm ²
Mass	approx. 150 g
Dimensions	12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 in)
Construction type	modular terminal housing , see system description
Mounting	mounting on 35 mm DIN rail acc. to DIN EN 60715