



**62**  
Spec 2.1


**Model number**

**VBG-CCL-G4F**  
CC Link Gateway IP65


**Features**

- Gateway according to AS-Interface specification 2.1 for up to 62 units
- AS-Interface connection via flat cable and EMS standard bottom section (included delivery)
- Protection degree IP65
- Voltage supply from AS-Interface
- PLC functionality
- Error diagnostics via LEDs and LC display


**Dimensions**

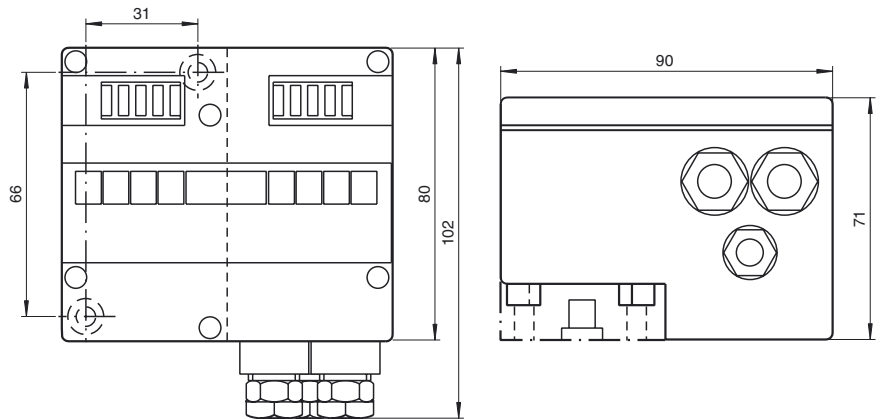

**Electrical connection**

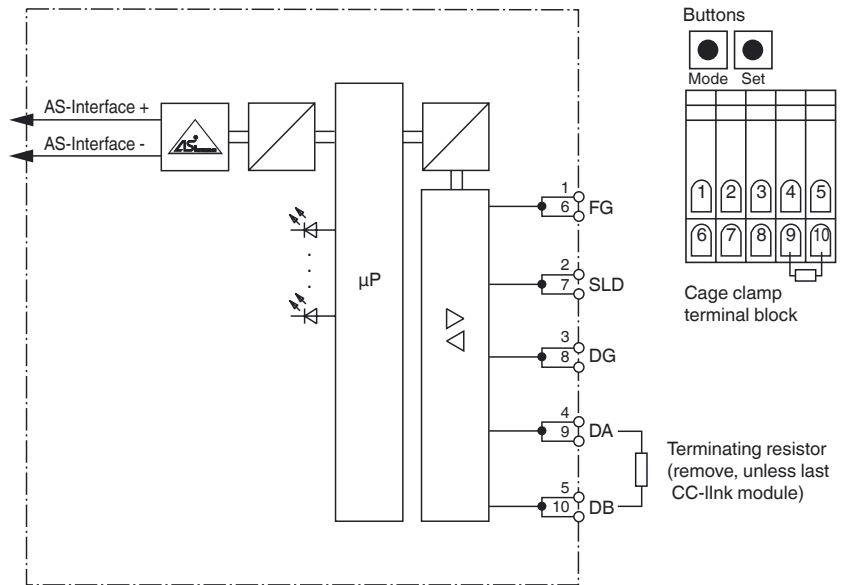

**Indicating / Operating means**

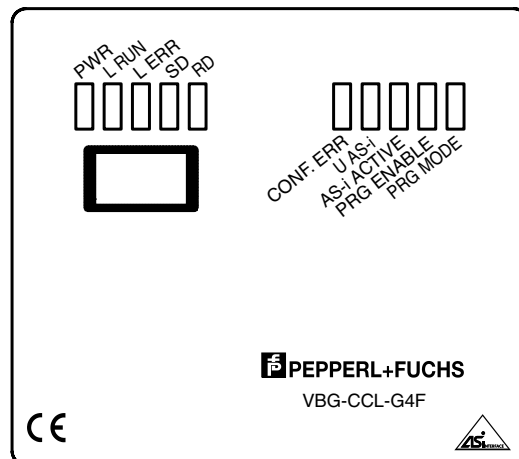

Release date: 2007-07-30 09:46 Date of issue: 2014-01-13 122887\_eng.xml

**Technical data****General specifications**

AS-Interface specification	V2.11
PLC-Functionality	integrated
Diagnostics function	integrated

**Indicators/operating means**

Display	LED display, 2 digits, for addressing and error messages
LED SD	CC Link send data; LED green
LED RD	CC Link receive data; LED green
LED AS-i ACTIVE	AS-Interface operation normal; LED green
LED CONFIG ERR	configuration error; LED red
LED PWR	voltage ON; LED green
LED L RUN	CC link in operation; LED green
LED L ERR	CC Link error; LED red
LED PRG ENABLE	autom. programming; LED green
LED PRG MODE	projecting mode active; LED yellow
LED U AS-i	AS-Interface voltage; LED green
Switch SET	Selection and setting of a slave address
Button MODE	Mode selection/save configuration

**Electrical specifications**

Insulation voltage	$U_i$	$\geq 500$ V
Rated operating voltage	$U_e$	from AS-Interface
Rated operating current	$I_e$	$\leq 200$ mA from AS-Interface

**Interface**

Interface type	remote device, 3 occupied stations
Protocol	according to CC-Link specification
Transfer rate	156 kBit/s up to 10 MBit/s

**Connection**

AS-Interface	cable piercing technology
CC Link	Cable gland M16 x 1.5 and cage spring terminals

**Ambient conditions**

Ambient temperature	0 ... 55 °C (32 ... 131 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)

**Mechanical specifications**

Protection degree	IP65
Material	
Housing	PA 6 GF30
Mass	355 g
Construction type	Plastic housing with cable gland

**Compliance with standards and directives**

Standard conformity	
Protection degree	EN 60529

**Function**

The VBG-CCL-G4F is a complete CC-Link master for use in the field (IP65). The gateway's G4 field housing has the same advantages as the serial master in this design.

Two buttons are used for address assignment of the AS-Interface slaves and acceptance of the desired configuration. In configuration mode, all detected AS-Interface slaves are displayed on the 2-digit LCD. In normal operation, the LCD is blank unless the master detects a faulty AS-Interface slave. The LEDs, located on the front panel, show the current status of the AS-i line.

**PLC Functionality**

The VBG-CCL-G4F provides 16 kBytes of program memory, 8 kBytes of main memory, 1024 counters and 1024 timers for PLC functionality. These capacities suffice to process the data on the AS-Interface. Thus the master can also be operated in "stand-alone" mode. The program processing time is 2 ms per 1000 word commands. The programming language is based on the STEP5® programming language. The AS-Interface CTRL functions (upload, download, start, stop, read or write internal memory) are available in expanded mode.

**Software**

No additional software is required.

**Accessories****U-G1P**

AS-Interface module mounting base for connection to round cable (AS-Interface)

**VAZ-G4-B**

Blind plug PG7

**VAZ-G4-B1**

Blind plug M12

**Note****U-G1F**

base is included with delivery