



Motor feedback systems linear HIPERFACE® TTK50

TTK50-HXI0K02



Model Name > [TTK50-HXI0K02](#)
Part No. > [1057792](#)



Illustration may differ

At a glance

- Absolute, non-contact, wear-free length measurement system for linear motors
- Measured lengths of up to 1 m
- Suitable for high traverse speeds of up to 10 m/s
- Reliable location positioning even in the event of condensation and contamination of the magnetic tape
- Electronic type label and programming of the position value
- Absolute location positioning, no reference run
- HIPERFACE® interface
- Conforms to RoHs

Your benefits

- Reference traverse no longer necessary due to absolute measuring system
- Maintenance-free thanks to non-contact measuring principle
- Simple integration of the system due to the HIPERFACE® interface
- Developed specifically for use in linear direct drives
- Also for use in rough ambient conditions



Performance

Measuring step:	0.244 µm at interpolation of the sine/cosine signals with e.g. 12 Bit
Length of period:	1 mm
Measuring length:	Max. 940 mm
Available memory area:	1,792 Byte (EEPROM 2048)
System accuracy (ambient temperature):	± 10 µm (20 °C)
Repeatability (Ta not constant):	< 5 µm
Magnetic strip length:	Measurement length + 60 mm
System part:	Read head
Measured value backlash:	< 10 µm

Mechanical data

Dimensions:	See dimensional drawing
Mass:	Read head 0.06 kg without cable, magnetic tape 0.18 kg/m
Material:	Read head die-cast zinc, magnetic tape 17410 hard ferrite 9/28 P
Piston speed:	10 m/s
Operating speed up to which the absolute position can be rel:	1.3 m/s
Connection type:	1 m

Electrical data

Electrical interface:	HIPERFACE
Operating voltage range/supply Voltage:	7 V DC ... 12 V DC
Recommended supply voltage:	8 V DC
Operating power consumption (no load):	$\leq 55 \text{ mA}$ ¹⁾

¹⁾ 100 mA approx. during adjustment

Interfaces


Type of code for the absolute value:	Binary
Interface signals:	Parameter channel RS 485: digital, Process data channel SIN, REFSIN, COS, REFCOS: analog, differential

Ambient data

Working temperature range:	-30 °C ... 80 °C
Storage temperature range:	-40 °C ... 85 °C, without package
Relative humidity/Condensation:	100 %, Condensation allowed
Resistance to shocks:	30 g, 6 ms (EN 60068-2-27)
Resistance to vibration:	20 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)
EMC:	(EN 61000-6-2) ¹⁾ (EN 61000-6-3)
Enclosure rating:	IP 65 (according to IEC 60529)
Temperature coefficient magnetic tape:	$(11 \pm 1) \mu\text{m/K/m}$
Maximum permitted ambient field strength:	$< 3 \text{ kA/m} \dots 4 \text{ kA/m}$ ($3.8 \text{ mT} \dots 5 \text{ mT}$) (to guarantee compliance with the quoted accuracy values)
Maximum permitted field strength:	$< 150 \text{ kA/m}$ ($< 190 \text{ mT}$) (to ensure that the magnetic tape is not permanently damaged)


¹⁾ The EMC according to the standards quoted is achieved when the motor feedback system which is connected to the central earthing point of the motor controller via a cable screen. Users must perform their own tests when other screen designs are used. ²⁾ The maximum permitted external field influence is reached when the position value deviates from the original value (without external field influence) by more than 5 μm . This value is reached when, at the sensor location, a field strength of 3 kA/m to 4 kA/m (3.8 mT to 5 mT) occurs in addition to the field strength of the magnetic tape.

Dimensional drawing

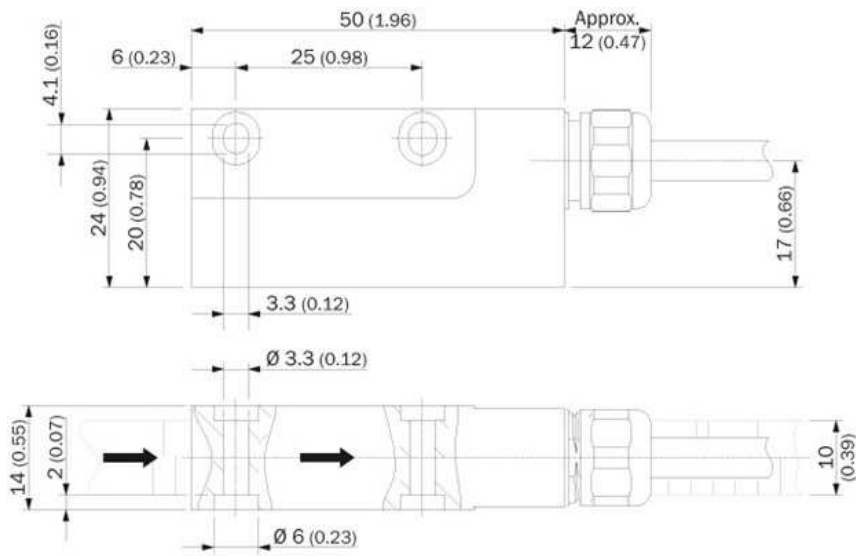


All dimensions in mm (inch)

Magnetic tape

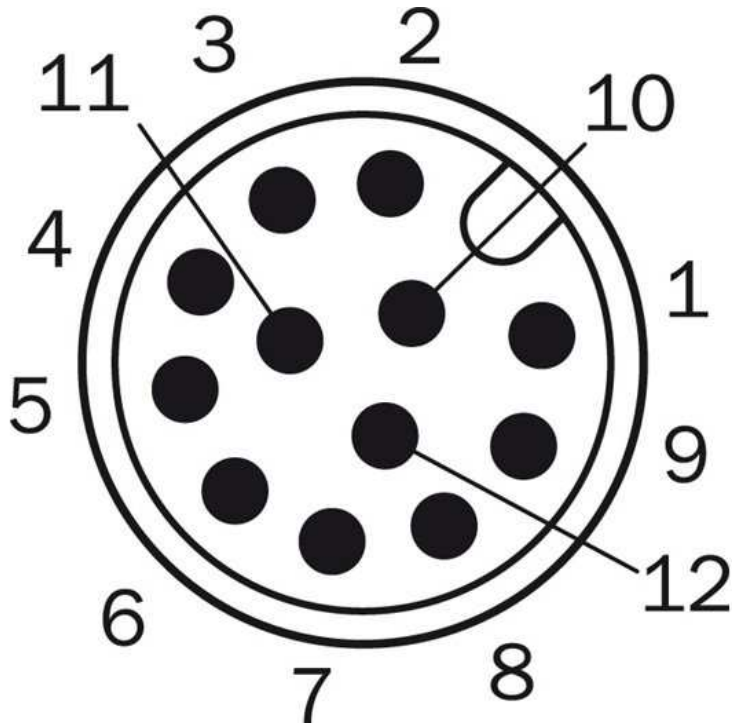

General tolerances

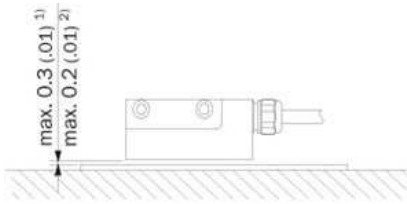

All dimensions in mm (inch)

¹⁾ Without cover strip.

²⁾ With cover strip.

General tolerances acc. to DIN ISO 2768-mk.

Wire allocation

Color of wires	Signal	Explanation
Brown	REFSIN	Process data channel
White	+ SIN	Process data channel
Black	REFCOS	Process data channel
Pink	+ COS	Process data channel
Gray or yellow	Data +	RS-485 parameter channel
Green or purple	Data -	RS-485 parameter channel
Blue	GND	Ground connection
Red	+U _s	Encoder supply voltage
Copper braid	Screen	Screen connected with encoder housing

Electronically adjustable via programming tool

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com