**interface**

Solutions for the Control Cabinet

Catalog 2016





▲ Sales Center
in Bamberg



▲ Company headquarters
in Bamberg



▲ STOCKO main plant
in Wuppertal

wieland group

AT HOME ALL OVER THE WORLD

Wieland Electric GmbH is a medium-sized family-run electrical and electronics company headquartered in Bamberg. Founded in 1910, Wieland is one of the pioneers of electrical connection technology.

This family business with its international outlook is a market leader in pluggable installation technology for functional buildings, with subsidiaries worldwide and production lines not only in Bamberg but also in the Czech Republic and China.

The Wieland Group, which has included STOCKO Contact GmbH & Co. KG since 1998, is therefore represented in over 70 countries and employs some 2,200 people.

Solutions for

-  ***Building technology***
-  ***Wind power***
-  ***Machine building***
-  ***Lighting technology***
-  ***Heating, ventilation,
air conditioning***





Product portfolio

- Electronic and electrical engineering for the control cabinet
- Safety technology
- Network and field bus systems
- Energy bus systems for industry and buildings
- Connectors up to protection type IP6X
- Building automation
- PCB terminals and plug connectors
- Sensor/actuator cabling

Industries

- Machine building
- Construction machines & cranes
- Buildings and lighting
- Logistics
- Power engineering
- Renewable energy sources
- Heating, ventilation and air conditioning systems

Business services

- Pre-assembly and wiring
- Product labeling service
- Integrated solutions inside distributors
- Customized solutions
- On-site project support
- Optimization of decentralized, pluggable installation solutions
- Certified machine safety tests



Safety training

- Software validation
- CSE certified safety engineers
- Basics and standards of functional safety
- Modification of old machines and major changes
- Design of safety functions and calculation with Sistema
- Machinery Directive, liability issues and CE conformity explanations

Software/configuration tools

- **wieplan**, configuration of terminal strips
- **wiemarc**, marking software for DIN rail terminal blocks
- **revos** configurator for connectors
- **gesis[®]PLAN** for building installation
- **podis[®]PLAN** for configuring the **podis[®]** energy bus system
- **samos[®]PLAN5+**, programming tool for **samos[®]PRO COMPACT**

Why Wieland?

- Standardized industrial solutions
- Customized solutions
- Support for your project
- Broad product portfolio
- Application worldwide due to international licenses
- Group-wide observance of human rights, including at suppliers
- Eco-friendly production





Contents

The Wieland Group	2	
interface	6	
Signal processing throughout your control system with our connectivity solutions		
Supply	10	
wipos power supplies Pure Power – no frills		
Coupling	20	
wienet / flare / cores		
Always the right connection		
Control	54	
ricos FLEX I/O fieldbus modules		
flare TIME timer and switching relays		
Modular and compact control and connection		
Measure and monitor	70	
flare CONTROL measuring and monitoring relays		
The right device for every monitoring task		
Protect	76	
wietap overvoltage protection		
Additional catalogs	104	
Support and consultation	106	
Subsidiaries and sales representatives	107	


contacts
are
green.





6

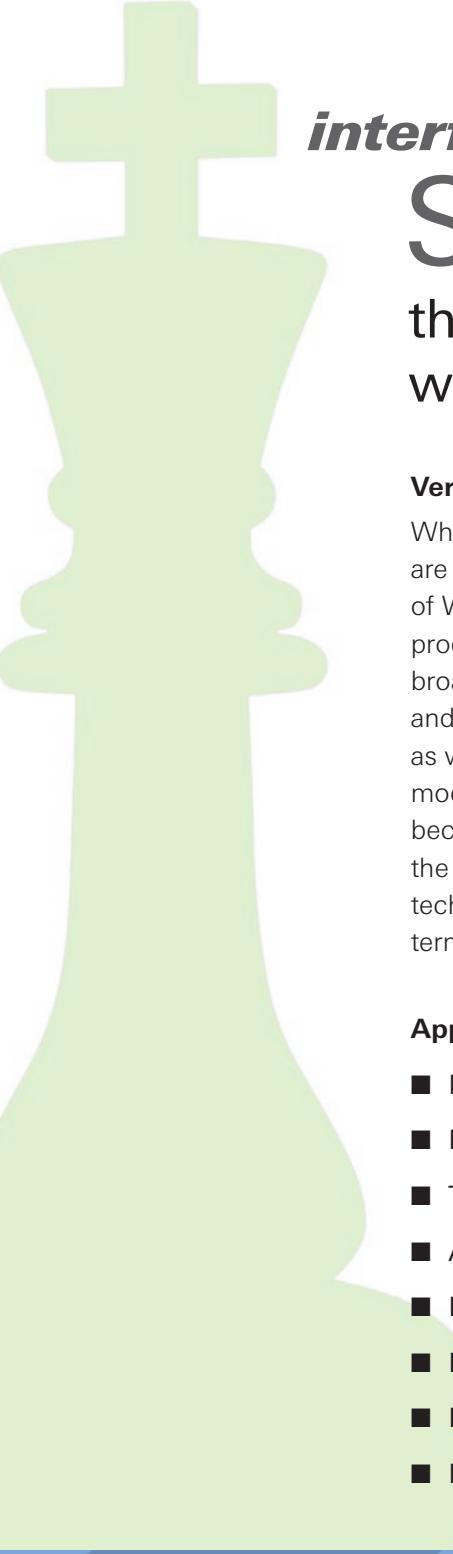

A large green silhouette of a chess king piece is positioned on the left side of the page, partially overlapping the text area.

interface

Signal processing

throughout your **control system**,
with our **connectivity solutions**



Versatility for every application

Wherever current flows and signals are processed, the unique strengths of Wieland Electric **interface** products shine through. Thanks to a broad range of relays, power supplies and overvoltage protection devices, as well as **interface** and analog modules, your application will also become a real all-rounder. Send all the right signals with our interface technology and innovative DIN rail terminal blocks.

Applications:

- Machine building
- Process control
- Transportation & material handling
- Automotive industry
- Power distribution
- Petrochemical
- Food industry
- Manufacturing engineering



Two contacts
are green.



Signal processing throughout your control system with



| supply |

wipos power supplies including single-phase and three-phase devices for DIN rail mounting in almost any application




| protection |

wietap overvoltage protection devices for guaranteed highest system availability and device protection

our

connectivity solutions

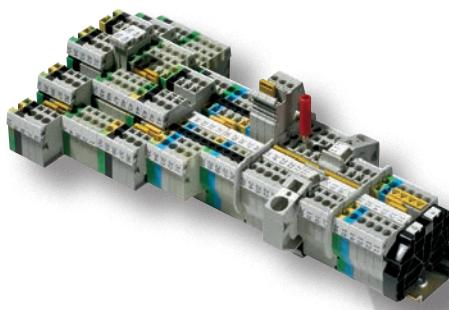

| control |

ricos FLEX, the modular and compact I/O fieldbus system, which can be combined and used very flexible. Timer and multi-function relays **flare** TIME for simple to highly complex control tasks



| coupling |

flare relays for floating coupling of control functions. Analog isolation amplifier **cores** for secure coupling. Ethernet switch series and VPN industrial router **wienet**, for communication



| measuring and monitoring |

Electronic measuring and monitoring relays **flare** CONTROL for all monitoring and communicating tasks in machines and systems

two
contacts
are
green.



wipos Stromversorgungen

Pure Power. Ohne Schnickschnack.

Stromversorgungen nehmen eine zentrale Funktion im Schaltschrank ein. Ihre Zuverlässigkeit beeinflussen in hohem Maße die Verfügbarkeit der Maschine oder des Prozesses. Daher ist ein robuster und bewährter Aufbau einer Stromversorgung von hoher Bedeutung. Wir verzichten bei der **wipos**-Serie auf unnötigen Schnickschnack und bieten Stromversorgungen an, die in den wichtigen Eigenschaften punkten.

wipos überzeugt in den wesentlichen Disziplinen:

 100% Leistung bis 60°C	 Parallelschaltbar zur Leistungserhöhung und Redundanz
 Auto- oder Weitspannungseingang für weltweiten Einsatz	 Hohe Betriebssicherheit durch lange Netzausfallüberbrückungszeiten >30ms
 PFC-Technik für hohe Funktionssicherheit	 Ausgleich von Spannungsfallen durch einstellbare Ausgangsspannung
 Outdoor-Installation möglich durch großen Temperaturbereich	 Einfache Inbetriebnahme durch LED-Diagnose
 Aktive Überwachung mit Schaltausgang	 Zur Montage auf Hutschiene TS 35 / TS 32
P1/3	

Zusätzliche Merkmale von **wipos PS1/3**

- Beständig in rauen Umgebungen
- Kompaktes Design
- 120% Power-Boost für 10 s
- Volle Leistung bei 2-phäsigem Betrieb
- Lloyds Register Schiffs-Zulassung (R)



wipos P1 Module

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
P1 24-1.25		wipos P1 24-1.25	81.000.6110.0	
P1 24-2.5		wipos P1 24-2.5		81.000.6120.0
Technische Daten				
Eingangsspannung			85 – 264 V AC, 90 – 375 V DC	
PFC	nicht notwendig		nicht notwendig	
Überbrückungszeit	>30 ms bei 230 V		>30 ms bei 230 V	
Ausgangsspannung	24 – 28 V		24 – 28 V	
Ausgangsstrom	1,25 A		2,5 A	
Parallelschaltbar	nein		nein	
In Reihe schaltbar	ja		ja	
Temperaturbereich	-40 ... +70 °C		-40 ... +70 °C	
Derating	>60 °C		>60 °C	
Meldekontakt	ja		ja	
Abmessung (mm) BxHxT	40,5 x 90 x 114		40,5 x 90 x 114	
Gewicht	290 g		360 g	
Klemmenart	Schraubklemme		Schraubklemme	
Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24 – 14)		0,2 – 2,5 mm ² (AWG 24 – 14)	
Wirkungsgrad	83 – 86 %		86 – 89 %	
Zulassungen	CE, UL1310 Class 2 HAZ. Class I Div.2		CE, UL1310 Class 2 HAZ. Class I Div.2	

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
P1 24-3.8		wipos P1 24-3.8	81.000.6135.0	
P1 24-5		wipos P1 24-5		81.000.6130.0
Technische Daten				
Eingangsspannung			115/230 V AC auto, 210 – 375 V DC	
PFC	ja		ja	
Überbrückungszeit	>30 ms bei 230 V		>30 ms bei 230 V	
Ausgangsspannung	22,5 – 28 V		22,5 – 28,5 V	
Ausgangsstrom	3,8 A		5 A	
Parallelschaltbar	nein		ja (bis zu 3)	
In Reihe schaltbar	ja		ja	
Temperaturbereich	-35 ... +70 °C		-35 ... +70 °C	
Derating	>60 °C		>60 °C	
Meldekontakt	ja		ja	
Abmessung (mm) BxHxT	64 x 124,5 x 123,6		64 x 124,5 x 123,6	
Gewicht	920 g		920 g	
Klemmenart	Schraubklemme		Schraubklemme	
Klemmenquerschnitt	0,5 – 6 mm ² (AWG 22 – 10)		0,5 – 6 mm ² (AWG 22 – 10)	
Wirkungsgrad	83 – 85 %		84 – 86 %	
Zulassungen	CE, UL1310 Class 2 HAZ. Class I Div.2		CE, UL1310 Class 2 HAZ. Class I Div.2	

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
P1 24-10		wipos P1 24-10	81.000.6140.0	
P1 24-20		wipos P1 24-20		81.000.6150.0
Technische Daten				
Eingangsspannung	115/230 V AC auto, 210 – 375 V DC		115/230 V AC auto 120 – 370 V DC	
PFC	ja		ja	
Überbrückungszeit	>30 ms bei 230 V		>30 ms bei 230 V	
Ausgangsspannung	22,5 – 28,5 V		22,5 – 28,5 V	
Ausgangsstrom	10 A		20 A	
Parallelschaltbar	ja (bis zu 3)		ja (bis zu 3)	
In Reihe schaltbar	ja		ja	
Temperaturbereich	-40 ... +70 °C		-40 ... +70 °C	
Derating	>60 °C		>55 °C	
Meldekontakt	ja		ja	
Abmessung (mm) BxHxT	83,5 x 124,5 x 123,6		175,5 x 124,5 x 123,6	
Gewicht	1300 g		1920 g	
Klemmenart	Schraubklemme		Schraubklemme	
Klemmenquerschnitt	0,5 – 6 mm ² (AWG 22 – 10)		0,5 – 6 mm ² (AWG 22 – 10)	
Wirkungsgrad	87 – 89 %		86 – 89 %	
Zulassungen	CE, UL1310 HAZ. Class I Div.2		CE, UL1310 HAZ. Class I Div.2	

wipos P1 Module

Stromversorgung wipos P1 12-5		Typ	Bestell-Nr.
wipos P1 12-5		81.000.6132.0	
Technische Daten			
Eingangsspannung	85 – 264 V AC, 90 – 375 V DC	PFC	nicht notwendig
Überbrückungszeit	>30 ms bei 230 V	Ausgangsspannung	12 – 14 V
Ausgangsstrom	5 A	Parallelschaltbar	nein
In Reihe schaltbar	ja	Temperaturbereich	-40 ... +70 °C
Derating	>61 °C	Meldekontakt	nein
Abmessung (mm) BxHxT	40,5 x 90 x 114	Gewicht	340 g
Klemmenart	Schraubklemme	Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)
Wirkungsgrad	86 %	Zulassungen	CE, UL, HAZ, FCC Class I Div.2

Stromversorgung wipos P1 12-10		Typ	Bestell-Nr.
wipos P1 12-10		81.000.6142.0	
Technische Daten			
Eingangsspannung	115/230V AC auto, 210 – 375 V DC	PFC	nicht notwendig
Überbrückungszeit	>30 ms bei 230 V	Ausgangsspannung	11,4 – 14,5 V
Ausgangsstrom	10 A	Parallelschaltbar	ja (bis zu 3)
In Reihe schaltbar	ja	Temperaturbereich	-35 ... +70 °C
Derating	>61 °C	Meldekontakt	nein
Abmessung (mm) BxHxT	64 x 124,5 x 123,6	Gewicht	920 g
Klemmenart	Schraubklemme	Klemmenquerschnitt	0,5 – 6 mm ² (AWG 22–10)
Wirkungsgrad	84 %	Zulassungen	CE, UL, HAZ, FCC Class I Div.2

Stromversorgung wipos P1 48-5		Typ	Bestell-Nr.
wipos P1 48-5		81.000.6134.0	
Technische Daten			
Eingangsspannung	115/230 V AC auto, 210 – 375 V DC	PFC	nicht notwendig
Überbrückungszeit	>30 ms bei 230 V	Ausgangsspannung	47 – 56 V
Ausgangsstrom	5 A	Parallelschaltbar	ja (bis zu 3)
In Reihe schaltbar	ja	Temperaturbereich	-40 ... +70 °C
Derating	>61 °C	Meldekontakt	nein
Abmessung (mm) BxHxT	83,5 x 124,5 x 123,6	Gewicht	1380 g
Klemmenart	Schraubklemme	Klemmenquerschnitt	0,5 – 6 mm ² ein-/feindr. (AWG 22–10)
Wirkungsgrad	90 %	Zulassungen	CE, UL, HAZ, FCC Class I Div.2



wipos P3 Module

Stromversorgung wipos P3 24-5 P3 24-10		Typ	Bestell-Nr.	Bestell-Nr.
		wipos P3 24-5	81.000.6160.0	
		wipos P3 24-10		81.000.6170.0
Technische Daten				
Eingangsspannung	340 – 575 VAC	480 – 820 VDC	340 – 575 VAC	480 – 820 VDC
PFC	ja (0,55)		ja (0,6)	
Überbrückungszeit	20 ms		20 ms	
Ausgangsspannung	22,5 – 28,5 V		22,5 – 28,5 V	
Ausgangstrom	5 A		10 A	
Parallelschaltbar	ja (bis zu 2)		ja (bis zu 2)	
In Reihe schaltbar	ja		ja	
Temperaturbereich	-40 ... +70 °C		-40 ... +70 °C	
Derating	>60 °C		>60 °C	
Meldekontakt	ja		ja	
Abmessung (mm) B x H x T	75 x 124 x 119		89 x 124 x 119	
Gewicht	800 g		1100 g	
Klemmenart	Schraubklemme		Schraubklemme	
Klemmenquerschnitt	bis 6 mm ² (AWG 10)		bis 6 mm ² (AWG 10)	
Wirkungsgrad	88 – 90 %		88 – 90 %	
Zulassungen	CE, UL, HAZ. IEC Class I Div.2		CE, UL, HAZ. IEC Class I Div.2	

Stromversorgung wipos P3 24-20		Typ	Bestell-Nr.
		wipos P3 24-20	81.000.6180.0
Technische Daten			
Eingangsspannung	340 – 575 V AC	480 – 820 V DC	
PFC	ja (0,7)		
Überbrückungszeit	20 ms		
Ausgangsspannung	22,5 – 28,5 V		
Ausgangstrom	20 A		
Parallelschaltbar	ja (bis zu 2)		
In Reihe schaltbar	ja		
Temperaturbereich	-30 ... +70 °C		
Derating	>60 °C		
Meldekontakt	ja		
Abmessung (mm) B x H x T	150 x 124 x 119		
Gewicht	1750 g		
Klemmenart	Schraubklemme		
Klemmenquerschnitt	bis 6 mm ² (AWG 10)		
Wirkungsgrad	88 – 90 %		
Zulassungen	CE, UL, HAZ. IEC Class I Div.2		

Stromversorgung wipos P3 24-40		Typ	Bestell-Nr.
		wipos P3 24-40	81.000.6190.0
Technische Daten			
Eingangsspannung	340 – 575 V AC	480 – 820 V DC	
PFC	ja (0,7)		
Überbrückungszeit	15 ms		
Ausgangsspannung	22,5 – 28,5 V		
Ausgangstrom	40 A		
Parallelschaltbar	ja (bis zu 2)		
In Reihe schaltbar	ja		
Temperaturbereich	-40 ... +70 °C		
Derating	>60 °C		
Meldekontakt	ja		
Abmessung (mm) B x H x T	276 x 127 x 119		
Gewicht	3200 g		
Klemmenart	Schraubklemme		
Klemmenquerschnitt	bis 6 mm ² (AWG 10)/ Ausgang bis 16 mm ² (AWG 6)		
Wirkungsgrad	90 – 92 %		
Zulassungen	CE, UL, HAZ. IEC Class I Div.2		

wipos Module

Redundanzmodul wipos R20	Typ	Bestell-Nr.
	wipos R20	81.000.6200.0
Technische Daten		
Eingangsspannung	21 – 28 V DC	
Eingangsstrom	20 A (in Summe)	
Ausgangsstrom	20 A	
Spannungsabfall typisch	0,5 V	
Temperaturbereich	-40 ... +70 °C	
Meldekontakt	je einer für Kanal A und B	
Nennstrom Meldekontakt	1 A bei 30 V DC	
Anzeige/Relais OK	Eingangsspannung Relais OK / 20...30 V (+/-5 %)	
Anzeige/Relais Fail	Eingangsspannung Relais Fail / <20 V oder >30 V (-5 %)	
Abmessung (mm) B x H x T	54 x 90 x 114	
Gewicht	210 g	
Klemmenart	Schraubklemme	
Klemmenquerschnitt	0,2 - 4 mm ² (AWG 24–12)	
Klemmenquerschnitt Meldekontakte	0,2 - 2,5 mm ² (AWG 24–14)	
Zulassungen	CE 	

Sicherungsbaustein wipos FM 4-10	Typ	Bestell-Nr.
	wipos FM 4-10	81.000.6210.0
Technische Daten		
Eingangsspannung	18 – 30 V	
Eingangsstrom über vier Sicherungen	40 A max.	
Ausgangsspannung	24 V (entspricht Eingangsspannung)	
Anzahl der Sicherungskreise	4	
Sicherungsnennstrom	max. 10 A (Verlustleistung der Sicherung beachten)	
Sicherungen	4 x G-Sicherungshalter 5 x 20 mm	
LED-Anzeige	eine je Sicherung, leuchtet bei defekter Sicherung	
Sammelmeldeausgang	ja	
Temperaturbereich	0 ... +60 °C	
Abmessung (mm) B x H x T	48 x 96 x 68	
Befestigungsart	Hutschienenmontage	
Gewicht	110 g	
Klemmenart	Schraubklemmen	
Klemmenquerschnitt Eingang	10 mm ² (AWG 8)	
Klemmenquerschnitt Ausgang	bis 4 mm ² (AWG 12) eindr., 2,5 mm ² (AWG 14) feindr.	
Zulassungen	CE 	

Unterbrechungsfreie Stromversorgung wipos UPS 24-30	Typ	Bestell-Nr.
	wipos UPS 24-30	81.000.6220.0
Technische Daten		
Bemessungseingangsspannung U _{IN}	24 V DC	
Eingangsstrom	max. 35 A	
Bemessungsausgangsspannung U _{OUT}	24 V DC	
Ausgangsstrom I _{OUT}	max. 30 A	
Ausgangsspannung (Batteriebetrieb)	18,7 – 28,0 V	
Ausgangsstrom (Batteriebetrieb)	max. 30 A	
Temperaturbereich	-40 ... +70 °C	
Derating	> 51 °C	
Meldekontakt Netz- oder Batteriestrom	ja	
Meldekontakt Batterieentladung	ja	
Meldekontakt Batterie defekt	ja	
Batterietyp	Blei oder Bleigel	
Batteriegröße	2 ... 12 Ah / 2 x 12 V	
Abmessung (mm) B x H x T	54 x 90 x 114	
Gewicht	370 g	
Klemmenart	Schraubklemme	
Klemmenquerschnitt	0,2–4 mm ² (AWG 24–12)	
Zulassungen	CE 	



wipos PS1 Module in schmaler Bauform

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
PS1 24-1.25		wipos PS1 24-1.25	81.000.6510.0	
PS1 24-2.5		wipos PS1 24-2.5		81.000.6520.0
Technische Daten				
Eingangsspannung		85 – 264 V AC, 90 – 350 V DC		
PFC	–	–		
Überbrückungszeit	> 154 ms bei 230 V	> 129 ms bei 230 V		
Ausgangsspannung	21,6 – 27,6	21,6 – 27,6		
Ausgangstrom	1,25 A (Power Boost 120 %)	2,5 A (Power Boost 120 %)		
Parallelschaltbar	ja	ja		
In Reihe schaltbar	ja	ja		
Temperaturbereich	-40 ... +70 °C	-40 ... +70 °C		
Derating	> 60 °C	> 60 °C		
Abmessung (mm) BxHxT	32 x 90 x 90	32 x 90 x 110		
Gewicht	195 g	260 g		
Klemmenart	Schraubklemme	Schraubklemme		
Klemmenquerschnitt Eingang	0,25 – 2,5 mm ² (AWG 24 – 14)	0,35 – 2,5 mm ² (AWG 22 – 14)		
Klemmenquerschnitt Ausgang	0,35 – 2,5 mm ² (AWG 22 – 14)	0,5 – 2,5 mm ² (AWG 22 – 14)		
Wirkungsgrad	86%	88%		
Zulassungen	CE, UL, HAZ.LOC., RoHS	CE, UL, HAZ.LOC., RoHS		

Stromversorgung wipos		Typ	Bestell-Nr.
PS1 24-5		wipos PS1 24-5	81.000.6530.0
Technische Daten			
Eingangsspannung	85 – 264 V AC, 90 – 350 V DC		
PFC	ja		
Überbrückungszeit	> 42 ms bei 230 V		
Ausgangsspannung	21,6 – 27,6		
Ausgangstrom	5 A (Power Boost 120 %)		
Parallelschaltbar	ja		
In Reihe schaltbar	ja		
Temperaturbereich	-40 ... +70 °C		
Derating	> 60 °C		
Abmessung (mm) BxHxT	40 x 125 x 122,2		
Gewicht	620 g		
Klemmenart	Schraubklemme		
Klemmenquerschnitt Eingang	0,35 – 4 mm ² (AWG 22 – 12)		
Klemmenquerschnitt Ausgang	0,35 – 4 mm ² (AWG 22 – 12)		
Wirkungsgrad	89%		
Zulassungen	CE, UL, HAZ.LOC., RoHS		

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
PS1 24-10		wipos PS1 24-10	81.000.6540.0	
PS1 24-20		wipos PS1 24-20		81.000.6550.0
Technische Daten				
Eingangsspannung	85 – 264 V AC, 90 – 350 V DC			
PFC	ja	ja		
Überbrückungszeit	> 44 ms bei 230 V	> 50 ms bei 230 V		
Ausgangsspannung	21,6 – 27,6	21,6 – 27,6		
Ausgangstrom	10 A (Power Boost 120 %)	20 A (Power Boost 120 %)		
Parallelschaltbar	ja	ja		
In Reihe schaltbar	ja	ja		
Temperaturbereich	-40 ... +70 °C	-40 ... +70 °C		
Derating	> 60 °C	> 60 °C		
Abmessung (mm) B x H x T	60 x 125 x 150	95 x 125 x 150		
Gewicht	900 g	1500 g		
Klemmenart	Schraubklemme	Schraubklemme		
Klemmenquerschnitt Ein.	0,5 – 4 mm ² (AWG 22 – 12)	1,5 – 4 mm ² (AWG 16 – 12)		
Klemmenquerschnitt Aus.	2,5 – 4 mm ² (AWG 14 – 12)	4 mm ² (AWG 12)		
Wirkungsgrad	92%	93%		
Zulassungen	CE, UL, HAZ.LOC., RoHS	CE, UL, HAZ.LOC., RoHS		

Sonderausgangsspannungen auf Anfrage
Klemmenquerschnitt feindrähtig

wipos PS3 Module in schmaler Bauform

Stromversorgung wipos PS3 24-5 PS3 24-10		Typ	Bestell-Nr.	Bestell-Nr.
		wipos PS3 24-5	81.000.6560.0	
		wipos PS3 24-10		81.000.6570.0
Technische Daten				
Eingangsspannung		320 – 576 V AC, 450 – 810 V DC		
PFC	–	–		
Überbrückungszeit	> 30 ms bei 400 V	> 20 ms bei 400 V		
Ausgangsspannung	22,5 - 29,5	22,5 - 29,5		
Ausgangstrom	5 A (Power Boost 6A)	10 A (Power Boost 12A)		
Parallelschaltbar	ja	ja		
In Reihe schaltbar	ja	ja		
Temperaturbereich	-40 ... +70 °C	-40 ... +70 °C		
Derating	> 60 °C	> 60 °C		
Abmessung (mm) B x H x T	40 x 125 x 122,2	60 x 125 x 150		
Gewicht	700 g	1000 g		
Klemmenart	Schraubklemme	Schraubklemme		
Klemmenquerschnitt Ein.	0,35 – 4 mm ² (AWG 22 – 12)	0,35 – 4 mm ² (AWG 22 – 12)		
Klemmenquerschnitt Aus.	0,75 – 4 mm ² (AWG 18 – 12)	2,5 – 4 mm ² (AWG 14 – 12)		
Wirkungsgrad	89%	89%		
Zulassungen	CE HAZ.LOC. □	CE UL cUL HAZ.LOC. □		

Stromversorgung wipos PS3 24-20		Typ	Bestell-Nr.
		wipos PS3 24-20	81.000.6580.0
Technische Daten			
Eingangsspannung	320 – 576 V AC, 450 – 810 V DC		
PFC	–		
Überbrückungszeit	> 20 ms bei 400 V		
Ausgangsspannung	22,5 - 29,5		
Ausgangstrom	20 A (Power Boost 24A)		
Parallelschaltbar	ja		
In Reihe schaltbar	ja		
Temperaturbereich	-40 ... +70 °C		
Derating	> 60 °C		
Abmessung (mm) B x H x T	95 x 125 x 150		
Gewicht	1600 g		
Klemmenart	Schraubklemme		
Klemmenquerschnitt Ein.	0,5 – 4 mm ² (AWG 20 – 12)		
Klemmenquerschnitt Aus.	4 mm ² (AWG 12)		
Wirkungsgrad	91%		
Zulassungen	CE UL cUL HAZ.LOC. □		

Stromversorgung wipos PS3 24-40		Typ	Bestell-Nr.
		wipos PS3 24-40	81.000.6590.0
Technische Daten			
Eingangsspannung	320 – 576 V AC		
PFC	–		
Überbrückungszeit	> 20 ms bei 400 V		
Ausgangsspannung	22,5 - 29,5		
Ausgangstrom	40 A (Power Boost 48A)		
Parallelschaltbar	ja		
In Reihe schaltbar	ja		
Temperaturbereich	-40 ... +70 °C		
Derating	> 60 °C		
Abmessung (mm) B x H x T	135 x 125 x 180		
Gewicht	2700 g		
Klemmenart	Schraubklemme		
Klemmenquerschnitt Ein.	1,5 – 16 mm ² (AWG 16 – 6)		
Klemmenquerschnitt Aus.	10 - 16 mm ² (AWG 8 - 6)		
Wirkungsgrad	91%		
Zulassungen	CE UL cUL HAZ.LOC. □		



wipos PB1 Module

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
PB1 5-1.5		wipos PB1 5-1.5	81.000.6321.0	
PB1 5-3		wipos PB1 5-3		81.000.6331.0
Technische Daten				
Eingangsspannung	90 – 264 V AC, 120 – 375 V DC	90 – 264 V AC, 120 – 375 V DC	nicht notwendig	nicht notwendig
PFC	nicht notwendig	nicht notwendig	> 30 ms bei 230 V	> 80 ms bei 230 V
Überbrückungszeit	> 30 ms bei 230 V	> 80 ms bei 230 V	Ausgangsspannung	5 V
Ausgangsspannung	5 V	5 – 5,5 V	Ausgangstrom	1,5 A
Ausgangstrom	1,5 A	3 A	Temperaturbereich	-40 ... +70 °C
Temperaturbereich	-40 ... +70 °C	-40 ... +70 °C	Derating	> 61 °C
Derating	> 61 °C	> 61 °C	LED Anzeige	ja
LED Anzeige	ja	ja	Abmessung (mm) BxHxT	18 x 91 x 57
Abmessung (mm) BxHxT	18 x 91 x 57	35 x 91 x 57	Einsatz	Installationsverteiler und Bedienpulte
Einsatz	Installationsverteiler und Bedienpulte	Installationsverteiler und Bedienpulte	Befestigungsart	Hutschienenmontage
Befestigungsart	Hutschienenmontage	Hutschienenmontage	Gewicht	65 g
Gewicht	130 g	Schraubklemme	Klemmenart	Schraubklemme
Klemmenart	Schraubklemme	Schraubklemme	Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)
Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)	0,2 – 2,5 mm ² (AWG 24–14)	Wirkungsgrad	74 %
Wirkungsgrad	82 %	CE, UL 1310 Class 2	Zulassungen	CE, UL 1310 Class 2
Zulassungen	CE, UL 1310 Class 2	Haz. Class I Div.2		Haz. Class I Div.2

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
PB1 12-0.83		wipos PB1 12-0.83	81.000.6302.0	
PB1 24-0.42		wipos PB1 24-0.42		81.000.6300.0
Technische Daten				
Eingangsspannung	90 – 264 V AC, 120 – 375 V DC	90 – 264 V AC, 120 – 375 V DC	nicht notwendig	nicht notwendig
PFC	nicht notwendig	nicht notwendig	> 30 ms bei 230 V	> 30 ms bei 230 V
Überbrückungszeit	> 30 ms bei 230 V	> 30 ms bei 230 V	Ausgangsspannung	12 V
Ausgangsspannung	12 V	24 – 28 V	Ausgangstrom	0,83 A
Ausgangstrom	0,83 A	0,42 A	Temperaturbereich	-40 ... +70 °C
Temperaturbereich	-40 ... +70 °C	-25 ... +70 °C	Derating	> 61 °C: 100 %, 70 °C: 75 %
Derating	> 61 °C: 100 %, 70 °C: 75 %	> 60 °C	LED Anzeige	ja
LED Anzeige	ja	ja	Abmessung (mm) BxHxT	18 x 91 x 57
Abmessung (mm) BxHxT	18 x 91 x 57	18 x 91 x 57	Einsatz	Installationsverteiler und Bedienpulte
Einsatz	Installationsverteiler und Bedienpulte	Installationsverteiler und Bedienpulte	Befestigungsart	Hutschienenmontage
Befestigungsart	Hutschienenmontage	Hutschienenmontage	Gewicht	65 g
Gewicht	65 g	65 g	Klemmenart	Schraubklemme
Klemmenart	Schraubklemme	Schraubklemme	Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)
Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)	0,2 – 2,5 mm ² (AWG 24–14)	Wirkungsgrad	78 %
Wirkungsgrad	80 %	CE, UL 1310 Class 2	Zulassungen	CE, UL 1310 Class 2
Zulassungen	CE, UL 1310 Class 2	Haz. Class I Div.2		Haz. Class I Div.2

Stromversorgung wipos		Typ	Bestell-Nr.	Bestell-Nr.
PB1 12-2		wipos PB1 12-2	81.000.6322.0	
PB1 24-1		wipos PB1 24-1		81.000.6310.0
Technische Daten				
Eingangsspannung	90 – 264 V AC, 120 – 375 V DC	90 – 264 V AC, 120 – 375 V DC	nicht notwendig	nicht notwendig
PFC	nicht notwendig	nicht notwendig	> 80 ms bei 230 V	> 80 ms bei 230 V
Überbrückungszeit	> 80 ms bei 230 V	> 80 ms bei 230 V	Ausgangsspannung	12 – 14 V
Ausgangsspannung	12 – 14 V	24 – 28 V	Ausgangstrom	2 A
Ausgangstrom	2 A	1 A	Temperaturbereich	-40 ... +70 °C
Temperaturbereich	-40 ... +70 °C	-25 ... +70 °C	Derating	> 61 °C: 100 %, 70 °C: 75 %
Derating	> 61 °C: 100 %, 70 °C: 75 %	> 60 °C	LED Anzeige	ja
LED Anzeige	ja	ja	Abmessung (mm) BxHxT	35 x 91 x 57
Abmessung (mm) BxHxT	35 x 91 x 57	35 x 91 x 57	Einsatz	Installationsverteiler und Bedienpulte
Einsatz	Installationsverteiler und Bedienpulte	Installationsverteiler und Bedienpulte	Befestigungsart	Hutschienenmontage
Befestigungsart	Hutschienenmontage	Hutschienenmontage	Gewicht	130 g
Gewicht	130 g	130 g	Klemmenart	Schraubklemme
Klemmenart	Schraubklemme	Schraubklemme	Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)
Klemmenquerschnitt	0,2 – 2,5 mm ² (AWG 24–14)	0,2 – 2,5 mm ² (AWG 24–14)	Wirkungsgrad	84 %
Wirkungsgrad	85 %	CE, UL 1310 Class 2	Zulassungen	CE, UL 1310 Class 2
Zulassungen	CE, UL 1310 Class 2	Haz. Class I Div.2		Haz. Class I Div.2


wipos PB1 Module

Stromversorgung wipos		
PB1 12-2.75		
PB1 24-1.5		
	Typ	Bestell-Nr.
wipos PB1 12-2.75	81.000.6332.0	Bestell-Nr.
wipos PB1 24-1.5		81.000.6320.0
Technische Daten		
Eingangsspannung	90 – 264 V AC, 120 – 375 V DC	90 – 264 V AC, 120 – 375 V DC
PFC	nicht notwendig	nicht notwendig
Überbrückungszeit	> 60 ms bei 230 V	> 100 ms bei 230 V
Ausgangsspannung	12 – 14 V	24 – 28 V
Ausgangsstrom	2,75 A	1,5 A
Temperaturbereich	-40 ... +70 °C	-25 ... +70 °C
Derating	> 56°C	> 56 °C
LED Anzeige	ja	ja
Abmessung (mm) B x H x T	53 x 91 x 57	53 x 91 x 57
Einsatz	Installationsverteiler und Bedienpulte	Installationsverteiler und Bedienpulte
Befestigungsart	Hutschienenmontage	Hutschienenmontage
Gewicht	250 g	190 g
Klemmenart	Schraubklemme	Schraubklemme
Klemmenquerschnitt	0,2 – 2,5 mm² (AWG 24–14)	0,2 – 2,5 mm² (AWG 24–14)
Wirkungsgrad	84 %	84 %
Zulassungen	CE, UL 1310 Class 2	CE, UL 1310 Class 2

Stromversorgung wipos		
PB1 12-4.5		
PB1 24-2.5		
	Typ	Bestell-Nr.
wipos PB1 12-4.5	81.000.6342.0	Bestell-Nr.
wipos PB1 24-2.5		81.000.6330.0
Technische Daten		
Eingangsspannung	90 – 264 V AC, 120 – 375 V DC	90 – 264 V AC, 120 – 375 V DC
PFC	nicht notwendig	nicht notwendig
Überbrückungszeit	> 60 ms bei 230 V	> 60 ms bei 230 V
Ausgangsspannung	12 – 14 V	24 – 28 V
Ausgangsstrom	4,5 A	2,5 A
Temperaturbereich	-40 ... +70 °C	-25 ... +70 °C
Derating	> 56°C	> 60 °C
LED Anzeige	ja	ja
Abmessung (mm) B x H x T	71 x 91 x 57	71 x 91 x 57
Einsatz	Installationsverteiler und Bedienpulte	Installationsverteiler und Bedienpulte
Befestigungsart	Hutschienenmontage	Hutschienenmontage und Schraubbefestigung
Gewicht	250 g	250 g
Klemmenart	Schraubklemme	Schraubklemme
Klemmenquerschnitt	0,2 – 2,5 mm² (AWG 24–14)	0,2 – 2,5 mm² (AWG 24–14)
Wirkungsgrad	84 %	86 %
Zulassungen	CE, UL 1310 Class 2 Haz. Class I Div.2	CE, UL 1310 Class 2 Haz. Class I Div.2

Stromversorgung wipos		
PB1 24-4.2		
	Typ	Bestell-Nr.
wipos PB1 24-4.2	81.000.6340.0	Bestell-Nr.
Technische Daten		
Eingangsspannung	90 – 264 V AC, 120 – 375 V DC	90 – 264 V AC, 120 – 375 V DC
PFC	nicht notwendig	nicht notwendig
Überbrückungszeit	> 60 ms bei 230 V	> 60 ms bei 230 V
Ausgangsspannung	24 – 28 V	24 – 28 V
Ausgangsstrom	4,2 A	4,2 A
Temperaturbereich	-40 ... +70 °C	-40 ... +70 °C
Derating	> 60 °C	> 60 °C
LED Anzeige	ja	ja
Abmessung (mm) B x H x T	90 x 91 x 57	90 x 91 x 57
Einsatz	Installationsverteiler und Bedienpulte	Installationsverteiler und Bedienpulte
Befestigungsart	Hutschienenmontage und Schraubbefestigung	Hutschienenmontage und Schraubbefestigung
Gewicht	380 g	380 g
Klemmenart	Schraubklemme	Schraubklemme
Klemmenquerschnitt	0,2 – 2,5 mm² (AWG 24–14)	0,2 – 2,5 mm² (AWG 24–14)
Wirkungsgrad	89 %	89 %
Zulassungen	CE, UL Haz. Class I Div.2	CE, UL Haz. Class I Div.2



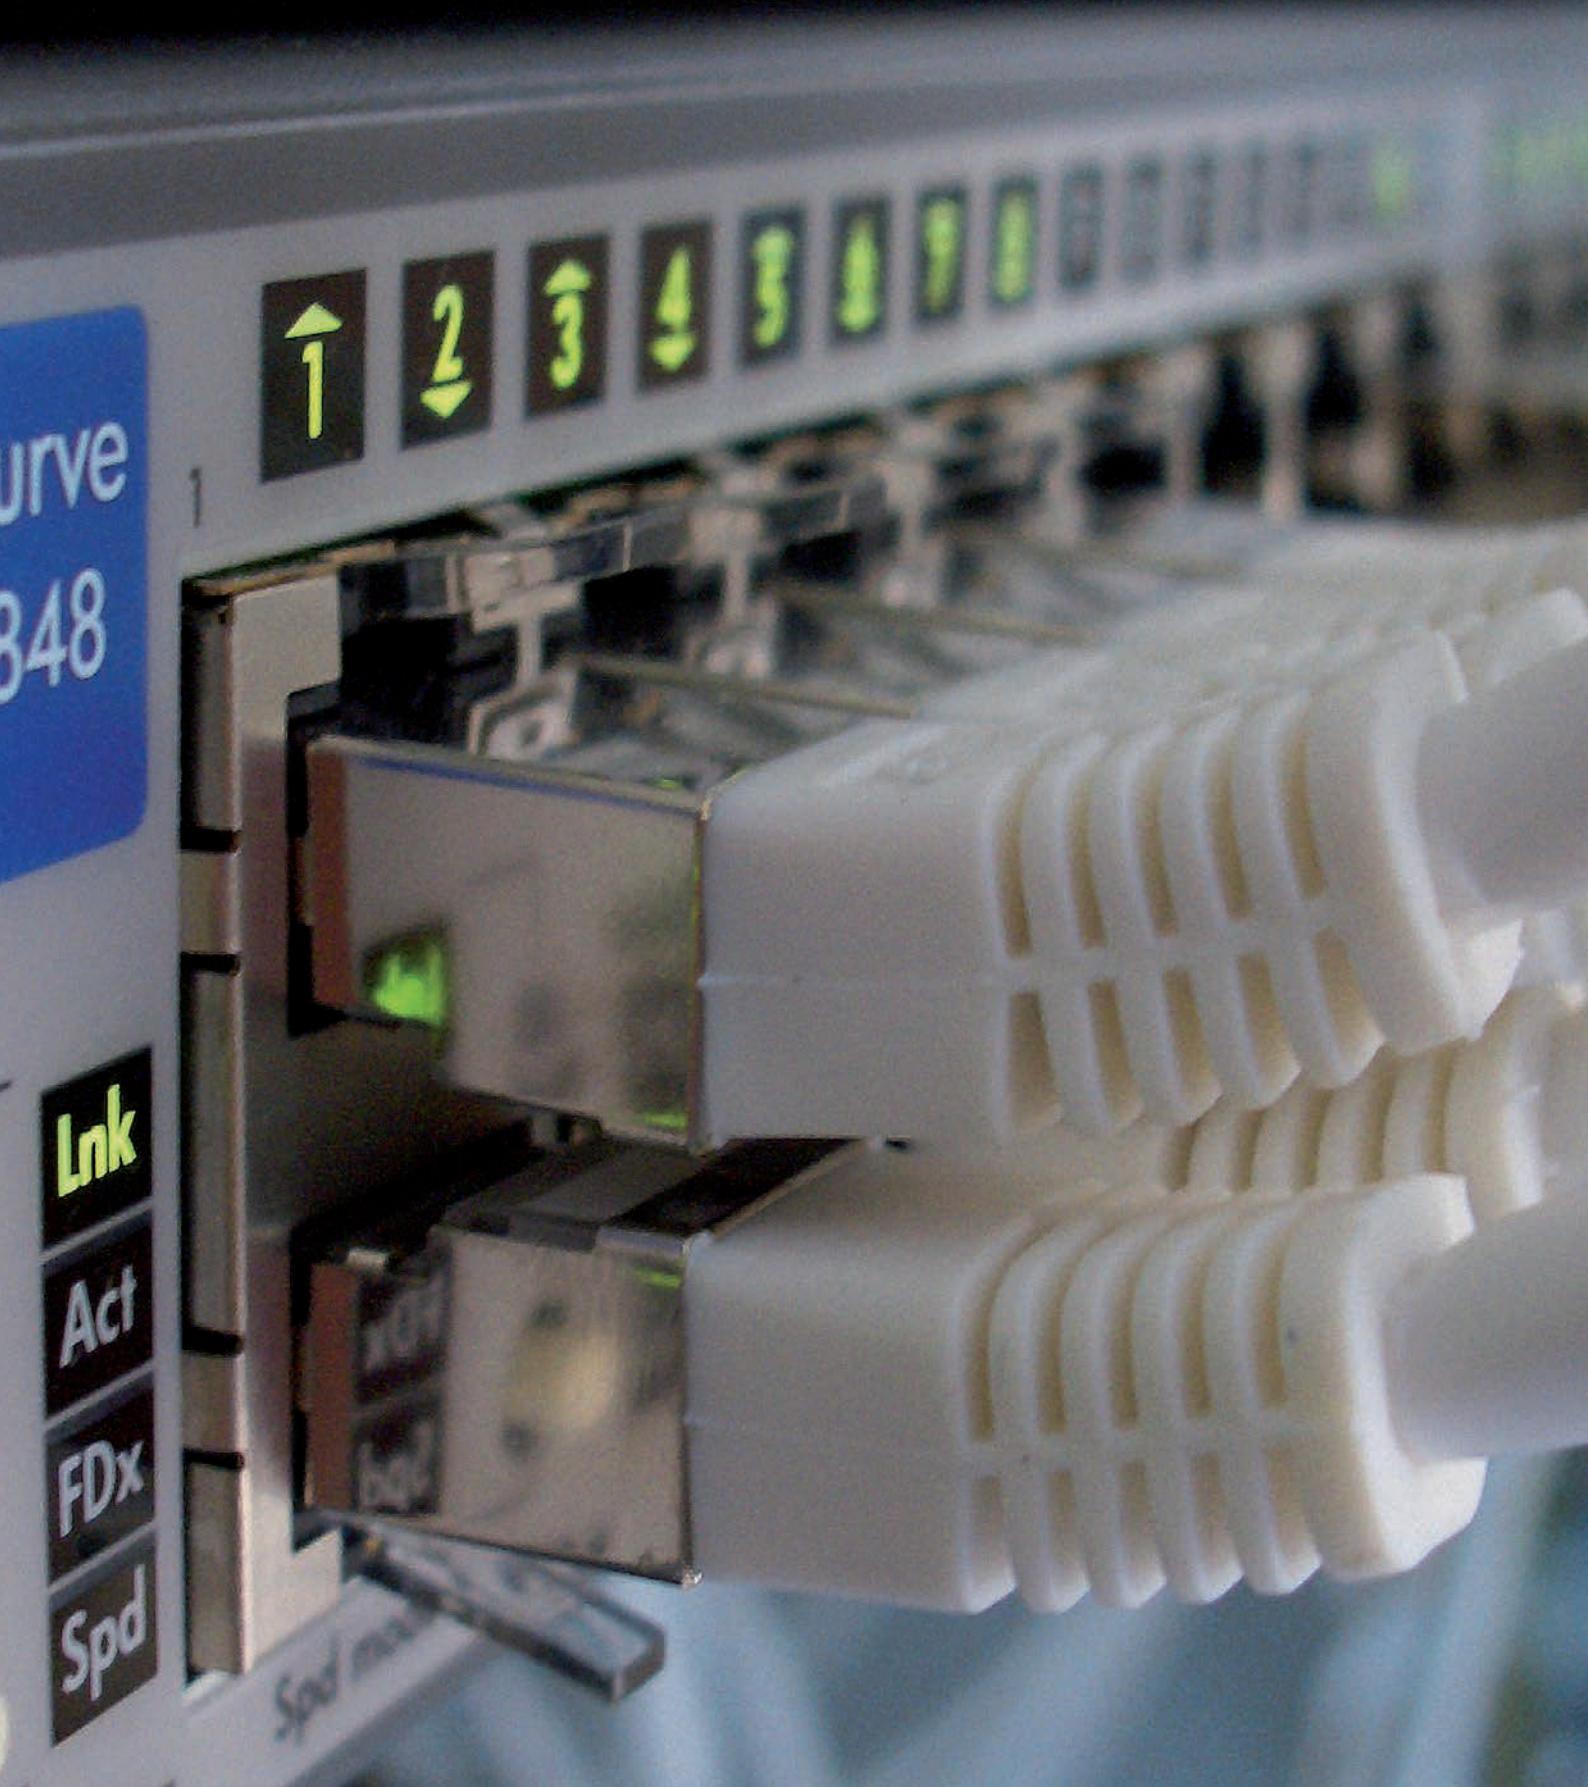

Industrial Ethernet switches

Safe and fast communication
for your process.

Ethernet connections have become part of many areas of life. This global standard is also making inroads into automation technology. Ethernet switches have become quite common for safe networking and coupling between machines, or inside the system. They manage the data flow in an effective and target-oriented manner. The devices are designed to be very robust and are optimally suited to harsh industrial environments.



Benefits:

- Redundant power supply
- Full compatibility according to IEEE 802.3, including autocrossing, autonegotiation, autosensing, auto-polarity
- Complete diagnostics display via various LEDs
- Compact design
- DIN rail mounting or screw connection
- Robust designs
- High degree of protection (IP40)



Ethernet Switches (Fast Ethernet)

wienet UMS 6-L

Type	Part No.
wienet UMS 6-L	83.040.0000.1
Technical Data	
Number of ports	6 RJ45 ports
Port types	6 x Ethernet and Fast Ethernet (10/100 Mbit/s)
Store and forward switching mode	yes
Autocrossing	yes
Autonegotiation	yes
Autosensing	yes
Autopolarity	yes
Full IEEE 802.3 compatibility	yes
Line, star and network topologies are possible	yes
Operating voltage	9 ... 30 V DC
Redundant power supply	2 infeeds
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes
Operating temperature	0 ... +60 °C
Dimensions (mm) W x H x D	45 x 90 x 80
Housing	Thermoset
Mounting	DIN rail and screw mounting
Type of connectors	Screw terminal, pluggable
Connector size	up to 1.5 mm ² (AWG 16)
Weight	160 g
Degree of protection	IP 40
Approvals	CE, UL, FCC

wienet UMS 6

Type	Part No.
wienet UMS 6	83.040.0000.0
Technical Data	
Number of ports	6 RJ45 ports
Port types	6 x Ethernet and Fast Ethernet (10/100 Mbit/s)
Store and forward switching mode	yes
Autocrossing	yes
Autonegotiation	yes
Autosensing	yes
Autopolarity	yes
Full IEEE 802.3 compatibility	yes
Line, star and network topologies are possible	yes
Operating voltage	9 ... 30 V DC
Redundant power supply	2 infeeds
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes
Operating temperature	0 ... +60 °C
Dimensions (mm) W x H x D	45.3 x 90 x 90.5
Housing	Aluminum extrusion
Mounting	DIN rail and screw mounting
Type of connectors	Screw terminal, pluggable
Connector size	up to 1.5 mm ² (AWG 16)
Weight	250 g
Degree of protection	IP 40
Approvals	CE, UL, FCC

Ethernet Switches (Fast Ethernet)

wienet UMS 8	Type	Part No.
	wienet UMS 8	83.040.0001.0
Technical Data		
Number of ports	8 RJ45-Ports	
Port types	8 x Ethernet and Fast-Ethernet (10/100 Mbit/s)	
Store and forward switching mode	yes	
Autocrossing	yes	
Autonegotiation	yes	
Autosensing	yes	
Autopolarity	yes	
Full IEEE 802.3 compatibility	yes	
Line, star and network topologies are possible	yes	
Operating voltage	9 ... 30 V DC	
Redundant power supply	2 infeeds	
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes	
Operating temperature	-10 ... +70 °C	
Dimensions (mm) W x H x D	45.3 x 90 x 90.5	
Housing	Aluminum extrusion	
Mounting	DIN rail and screw mounting	
Type of connectors	Screw terminal, pluggable	
Connector size	up to 1.5 mm ² (AWG 16)	
Weight	270 g	
Degree of protection	IP 40	
Approvals	CE, UL, FCC	



Ethernet Switches (Giga Ethernet)

wienet UMS 8-G

Type	Part No.
wienet UMS 8-G	83.040.0106.0
Technical Data	
Number of ports	8 x RJ45
Port types	6 x Giga-Ethernet (10/100/1000 Mbit/s)
Store and forward switching mode	yes
Autocrossing	yes
Autonegotiation	yes
Autosensing	yes
Autopolarity	yes
Full IEEE 802.3 compatibility	yes
Line, star and network topologies are possible	yes
Operating voltage	9 ... 48 V DC
Redundant power supply	2 infeeds
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes
Operating temperature	-10 ... +70 °C
Dimensions (mm) W x H x D	45.3 x 90 x 90.5
Housing	Metal
Mounting	DIN rail and screw mounting
Type of connectors	Screw terminal, pluggable
Connector size	0.2 – 1.5 mm ² (AWG 24–16)
Weight	255 g
Degree of protection	IP 50
Approvals	CE, UL, FCC

wienet UMS 8-2G

Type	Part No.
wienet UMS 8-2G	83.040.0103.0
Technical Data	
Number of ports	10 RJ45-Ports
Port types	8 x Ethernet and Fast-Ethernet (10/100 Mbit/s) 2 x Giga-Ethernet (10/100/1000 Mbit/s)
Store and forward switching mode	yes
Autocrossing	yes
Autonegotiation	yes
Autosensing	yes
Autopolarity	yes
Full IEEE 802.3 compatibility	yes
Line, star and network topologies are possible	yes
Operating voltage	12 ... 48 V DC
Redundant power supply	2 infeeds
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes
Operating temperature	-40 ... +70 °C
Dimensions (mm) W x H x D	54 x 146 x 130.5
Housing	Aluminum extrusion
Mounting	DIN rail and screw mounting
Type of connectors	Screw terminal, pluggable
Connector size	up to 1.5 mm ² (AWG 16)
Weight	1000 g
Degree of protection	IP 40
Approvals	CE, UL, FCC

Ethernet Switches (with optical ports)

wienet UMS 4-1FM



Type	Part No.
wienet UMS 4-1FM	83.040.0002.0
Technical Data	
Number of ports	4 x RJ45, 1 x ST (optical multi mode)
Port types	10/100BaseT(X), 100BaseFX
Store and forward switching mode	yes
Autocrossing	yes
Autonegotiation	yes
Autosensing	yes
Autopolarity	yes
Full IEEE 802.3 compatibility	yes
Line, star and network topologies are possible	yes
Operating voltage	9 ... 30 V DC
Redundant power supply	2 infeeds
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes
Operating temperature	-10 ... +70 °C
Dimensions (mm) W x H x D	45.3 x 90 x 90.5
Housing	Metal
Mounting	DIN rail and screw mounting
Type of connectors	Screw terminal, pluggable
Connector size	0.2 – 1.5 mm ² (AWG 24–16)
Weight	260 g
Degree of protection	IP 50
Approvals	CE, UL, FCC

wienet UMS 4-1FS



Type	Part No.
wienet UMS 4-1FS	83.040.0003.0
Technical Data	
Number of ports	4 x RJ45, 1 x SC (optical single mode)
Port types	10/100BaseT(X), 100BaseFX
Store and forward switching mode	yes
Autocrossing	yes
Autonegotiation	yes
Autosensing	yes
Autopolarity	yes
Full IEEE 802.3 compatibility	yes
Line, star and network topologies are possible	yes
Operating voltage	9 ... 30 V DC
Redundant power supply	2 infeeds
Diagnostic LEDs (power / link status / data / data rate)	yes / yes / yes / yes
Operating temperature	-10 ... +70 °C
Dimensions (mm) W x H x D	45.3 x 90 x 90.5
Housing	Metal
Mounting	DIN rail and screw mounting
Type of connectors	Screw terminal, pluggable
Connector size	0.2 – 1.5 mm ² (AWG 24–16)
Weight	260 g
Degree of protection	IP 50
Approvals	CE, UL, FCC





Applications

- Energy Systems
 - Wind turbines
 - Solar farms
 - Transformer station
 - Combined heat and power units
 - Biogas cogeneration systems
 - Heat pumps, ...
- Water and waste water management
- System monitoring in machine building
 - Washing machines
 - Packaging machines
 - Compressors, ...
- External surveillance camera
- Vending
Telemetry online sales or ticket machines
- Smart metering
- Mobile fleet management



wienet VPN Industrial Router – unlimited M2M communication

Functionality which convinces

Wieland's **wienet** VPN industrial routers ensure increased efficiency and data security. Whether it is about the control of machines, monitoring of production lines or the coordination of all production areas a permanent communication between devices is needed to complete such a complex task. Access to stored data using wireless networks is not always possible or safe. Now Wieland develops with its modern router technology new fields of applications. For example control commands, level indicators or video signals can now be transmitted. At download speeds of up to 100 Mbit/s and upload speeds of up to 50 Mbit/s (depending on the network operator) the **wienet** VPN industrial router is sure to cover the available connectivity options of GPRS up to LTE. With automatic login wienet VPN industrial router will always access the fastest available connection.

Each router has its own IP address and can be configured through the integrated web interface.

It supports services such as DHCP, NAT and DynDNS. The routers communicate directly or via the control panel to open a secure VPN connection. The establishment of an IPSec encrypted tunnel is alternatively possible.

wienet VPN routers are ideal components for industrial use in conjunction with VPN-service portals, such as Wie-Service24.

With the arrangement of the ports on the frontpanel and a standard USB port, the **wienet** VPN industrial router are extremely user friendly. A clear statistic of mobile connections is used for better control.

Optionally, the devices are available with a second SIM card slot, additional I/O, RS-232, RS-422/RS-485, M-Bus, several Ethernet interfaces, WiFi module or integrated 3 or 5 port switch.

Advantages

- Expanded operating temperature range of -40 °C to 75 °C
- DIN top hat rail assembly
- An extremely robust aluminium housing



Industrial mobile router WR-LTE v3

wienet WR-LTE v3 SL	Type	Interfaces	Art.No.
• High-performance CPU Cortex A8, 1 GHz (2000 DMIPS)	wienet WR-LTEv3 SL		
• Memory: 256 MB flash memory, 512 MB RAM, 128 kB M-RAM	WR-LTE v3 SL	LAN, USB, DI, DO, 2xSIM	83.041.0700.1
• 2x SIM card slot (Mini SIM 2FF)	WR-LTE v3 SL WIFI	LAN, USB, DI, DO, 2xSIM, RS232	83.041.0760.1
• 2x or 5x Ethernet	WR-LTE v3 SL RS232	LAN, USB, DI, DO, 2xSIM, RS485/422	83.041.0701.1
• 1x RJ45 port expansion RS232 or RS485/422	WR-LTE v3 SL RS232+RS422/485	LAN, USB, DI, DO, 2xSIM, M-Bus	83.041.0702.1
• 1x USB 2.0 host	WR-LTE v3 SL RS232+RS422/485 WIFI	LAN, USB, 5DI, 3DO, 2AI, 2xSIM	83.041.0762.1
• 2x DI	WR-LTE v3 SL 5-Port	2xLAN, USB, DI, DO, 2xSIM	83.041.0709.1
• 1x DO	WR-LTE v3 SL 5-Port WIFI	LAN, USB, DI, DO, 2xSIM, WIFI	83.041.0769.1
• 1x MicroSD			
• 3 antenna ports: Main, DIV, GPS, WIFI (optional)			
• 1x WIFI/WLAN 802.11 b/g/n (optional), supports access point and client mode			
Delivery scope:			
VPN mobile router			
Including mobile radio antennas and WIFI antenna (optional)			
Including USB stick with documentation			
Including RJ45 patch cable			
Including DIN rail (top hat rail) adapter			
			
Networks			
DHCP - automatic IP address in LAN network		NAT/PAT - Network/Port Address Translation	
SNMP v1/v2c/v3 - Network management, communication to router and its I/O and M-Bus modules		VRP - redundant communication paths (routing)	
DynDNS - access to router if dynamic IP used		Dial-In - Dial-up router option (network) - communication via "CSD call"	
Integrated firewall (SPI)		OSPF, BGP, RIP - routing protocols (optional)	
VLAN, QoS - expanded Layer 2 network functions (optional)		DMVPN	
PPPoE bridge		IGMP, BGP, OSPF, RIP, SMTP, SMTSP	
VPN tunnel			
Secure data encryption with IPSec and OpenVPN (including X.509 certificates)		Basic data transmission without encoding via GRE and L2TP tunnel	
EasyVPN			
Configuration and diagnostics			
Configuration and firmware update via Web interface, USB stick and central Internet server		Remote router maintenance via SMS - switch Internet connection on and off, change SIM card, switch digital output, query status information	
Change between different configuration profiles (via Web interface, SMS, digital input or scheduler)		Comprehensive mobile radio statistics options (reception strength, radio cell, adjacent cell, transported volume, connection cancellations, etc.)	
LED status display		Network status	
Mobile radio status		One-CLICK reports: Current configuration, system log, routing table, reboot log, kernel log	
SNMP v1/v2c/v3 - status query			
Optional expansions			
Second SIM card - redundancy to protect communication when roaming; data volume used and active digital input (DI)		User (software) module - various function expansions	
Wie-Service24 - VPN server portal			
Additional functions and characteristics			
NTP client, NTP server - time synchronization		Communication via SMS - AT commands to the RS232, Ethernet and I/O interface	
Script programming - StartUp script, Up/Down script		Script language Bash, Python	
Technical data			
Mounting		DIN rail (top hat rail) or table	
Operating voltage		10 - 60 V DC	
Power consumption typical / average / peak / sleep mode		2.5 W / 4 W / 11 W / 10 mW	
Operating temperature / storage temperature		-30 ... +60 °C / -40 ... +85 °C	
Humidity		0 ... 95 %	
Protection type		IP30	
On-board I/O		6-pin plug-in socket	
- Output (DO)		300 mA / max. 60 V	
- 2x input (DI)		10-60 V DC	
Dimensions (HxWxD)		125 x 55 x 97	
Weight		375 g	
Antenna connector			
- ANT + DIV mobile radio antenna		SMA	
- GPS antenna		SMA	
- WIFI antenna (optional)		R-SMA	
Frequency bands			
- GSM/GPRS/EDGE		900/1800/1900 MHz	
- UMTS		900/2100 MHz	
- HSPA+		900/2100 MHz	
- LTE		800/900/1800/2100/2600 MHz	
Bit rates			
- Download Upload GPRS/edge		Max. 236.7 kbit/s Max. 118.4 kbit/s	
- Download Upload UMTS/HSPA+		Max. 21.1 Mbit/s Max. 5.76 Mbit/s	
- Download Upload LTE		Max. 100 Mbit/s Max. 50 Mbit/s	
Technical data GPS			
- Protocol		NMEA 0183 v3.0	
- Frequency		1575.42 MHz	
- Antenna		50 Ohm - active	
Technical data microSD			
- Supported technologies		SDHC, SDXC	
- Supported capacities		SDHC to 32 GB, SDXC from 32 GB to 64 GB	
Complies with standards		EN 61000-4-2 (ESD), IEC 61000-4-3 (RF field AM modulated),	
		EN 61000-4-4 (fast transient), EN 61000-4-5 (surge)	
		EN 61000-4-6 (RF-conducted), EN 55022, EN 61000-4-8, EN 60068-2-2, EN 60068-2-1, EN 60068-2-78, E8 10R-04	

Industrial mobile router 4G LTE v2

wienet LTE LR77 v2 SL „Basic“	Type	Interfaces	Art.No.
• 1x SIM card slot	wienet LR77v2 SL Basic		
• 1x Ethernet	LR77v2	LAN, USB, DI, DO, 1xSIM	83.041.0050.1
• 1x RJ45 port expansion	LR77v2 RS232	LAN, USB, DI, DO, 1xSIM, RS232	83.041.0051.1
• 1x USB	LR77v2 RS485/422	LAN, USB, DI, DO, 1xSIM, RS485/422	83.041.0052.1
• 1x DI	LR77v2 MBUS	LAN, USB, DI, DO, 1xSIM, M-Bus	83.041.0053.1
• 1x DO	LR77v2 CNT	LAN, USB, 5DI, 3DO, 2AI, 1xSIM	83.041.0054.1
	LR77v2 ETH	2x LAN, USB, DI, DO, 1xSIM	83.041.0055.1
wienet LTE LR77v2 SL „Compact“	wienet LR77v2 SL Compact		
• 2x SIM card slot	LR77v2c SL ETH	2x LAN, 2xSIM	83.041.0505.3
• 2x Ethernet (LAN-to-LAN or switch-bridge)	LR77v2c SL ETH WIFI	2x LAN, WIFI, 2xSIM	83.041.0565.3
• Best price-performance ratio			
• No USB interface			
• No DIO			
wienet LTE LR77v2 SL „Full“	wienet LR77v2 SL Full		
• 2x SIM card slot	LR77v2f SL	LAN, USB, DI, DO, 2xSIM	83.041.0500.1
• 1x Ethernet	LR77v2f SL RS232	LAN, USB, DI, DO, 2xSIM, RS232	83.041.0501.1
• 2x RJ45 port expansion	LR77v2f SL RS485/422	LAN, USB, DI, DO, 2xSIM, RS485/422	83.041.0502.1
• 1x USB	LR77v2f SL MBUS	LAN, USB, DI, DO, 2xSIM, M-Bus	83.041.0503.1
• 1x DI	LR77v2f SL CNT	LAN, USB, 5DI, 3DO, 2AI, 2xSIM	83.041.0504.1
• 1x DO	LR77v2f SL ETH	2xLAN, USB, DI, DO, 2xSIM	83.041.0505.1
• GPS receiver (not in combination with WIFI)	LR77v2f SL WIFI	LAN, USB, DI, DO, 2xSIM, WIFI	83.041.0560.1
	LR77v2f SL RS232 RS232	LAN, USB, DI, DO, 2xSIM, 2xRS232	83.041.0511.1
	LR77v2f SL RS485 RS232	LAN, USB, DI, DO, 2xSIM, RS232, RS485/422	83.041.0512.1
	LR77v2f SL MBUS RS232	LAN, USB, DI, DO, 2xSIM, RS232, M-Bus	83.041.0513.1
	LR77v2f SL CNT RS232	LAN, USB, 5xDI, 3xDO, 2xAI, 2xSIM, RS232	83.041.0514.1
	LR77v2f SL ETH RS232	2xLAN, USB, DI, DO, 2xSIM, RS232	83.041.0515.1
	LR77v2f SL RS485 RS485	LAN, USB, DI, DO, 2xSIM, 2xRS485/422	83.041.0522.1
	LR77v2f SL MBUS RS485	LAN, USB, DI, DO, 2xSIM, RS485/422, M-Bus	83.041.0523.1
	LR77v2f SL CNT RS485	LAN, USB, 5xDI, 3xDO, 2xAI, 2xSIM, RS485/422	83.041.0524.1
	LR77v2f SL ETH RS485	2xLAN, USB, DI, DO, 2xSIM, RS485/422	83.041.0525.1
	LR77v2f SL RS232 WIFI	LAN, USB, DI, DO, 2xSIM, WIFI, RS232	83.041.0561.1
	LR77v2f SL RS485 WIFI	LAN, USB, DI, DO, 2xSIM, WIFI, RS485/422	83.041.0562.1
	LR77v2f SL MBUS WIFI	LAN, USB, DI, DO, 2xSIM, WIFI, M-Bus	83.041.0563.1
	LR77v2f SL CNT WIFI	LAN, USB, 5xDI, 3xDO, 2xAI, 2xSIM, WIFI	83.041.0564.1
	LR77v2f SL ETH WIFI	2xLAN, USB, DI, DO, 2xSIM, WIFI	83.041.0565.1
	LR77v2f SL 3-Port	3xLAN, USB, DI, DO, 2xSIM	83.041.0599.1
Delivery scope:			
VPN mobile router			
Including antennas			
Including USB stick with documentation			
Including RJ45 patch cable			
Including DIN rail (top hat rail) adapter			
			
			
	Networks		
DHCP - automatic IP address in LAN network		NAT/PAT - Network/Port Address Translation	
SNMP - network management, communication to router and its I/O and M-Bus modules		VRRP - redundant communication paths (routing)	
DynDNS - access to router if dynamic IP used		Dial-In - Dial-up router option (network) - communication via "CSD call"	
Integrated firewall (SPI)		OSPF, BGP, RIP - routing protocols (optional)	
VLAN, QoS - expanded Layer 2 network functions (optional)			
	VPN tunnel		
Secure data encryption with IPSec and OpenVPN (including X.509 certificates)		Basic data transmission without encoding via GRE and L2TP tunnel	
	Configuration and diagnostics		
Web interface		SMS functions	
Several profiles		Comprehensive mobile radio statistics options	
LED status display		Telnet and SSH - command line access	
	Optional expansions		
Second SIM card		User (software) module - various function expansions	
Wie-Service24 - VPN server portal			
	Additional functions and characteristics		
NTP client, NTP server - time synchronization		Communication via SMS - AT commands to the RS232, Ethernet and I/O interface	
	Technical data		
Mounting		DIN rail (top hat rail) or table	
Operating voltage		10 - 30 V DC	
Power consumption		5.5 W max.	
Operating temperature		-30 ... +60 °C	
On-board I/O			
– PIN allocation		DO/GND/DI	
– Output (DO)		120 mA / max. 30 V	
– Input (DI)		10-30 V DC	
Dimensions (HxWxD)		42 x 80.5 x 113.5 mm	
Weight		270 g	
Antenna connector		2x SMA - 50 Ohm	
Frequency bands			
– GSM/GPRS/EDGE		900/1800/1900 MHz	
– UMTS		850/2100 MHz	
– LTE		800/900/1800/2100/2600 MHz	
Download Upload UMTS		Max. 42 Mbit/s Max. 5.7 Mbit/s	
Download Upload LTE		Max. 100 Mbit/s Max. 50 Mbit/s	
Complies with standards		CE, E8	
		EN 61000-4-3, EN 61000-4-8	
		EN 55022, E8 10R-04 7056	



Industrial mobile router 3G UMTS/HSDPA/HSUPA/HSPA+ v2

wienet HSPA+ UR5iv2 SL „Basic“	Type	Interfaces	Art.No.
• 1x SIM card slot	wienet UR5iv2 SL Basic		
• 1x Ethernet	UR5iv2	LAN, USB, DI, DO, 1xSIM	83.041.0040.1
• 1x RJ45 port expansion	UR5iv2 RS232	LAN, USB, DI, DO, 1xSIM, RS232	83.041.0041.1
• 1x USB	UR5iv2 RS485/422	LAN, USB, DI, DO, 1xSIM, RS485/422	83.041.0042.1
• 1x DI	UR5iv2 MBUS	LAN, USB, DI, DO, 1xSIM, M-Bus	83.041.0043.1
• 1x DO	UR5iv2 CNT	LAN, USB, 5DI, 3DO, 2AI, 1xSIM	83.041.0044.1
	UR5iv2 ETH	2x LAN, USB, DI, DO, 1xSIM	83.041.0045.1
wienet HSPA+ UR5iv2 SL „Compact“	wienet UR5iv2 SL Compact		
• 2x SIM card slot	UR5iv2c SL ETH	2x LAN, 2xSIM	83.041.0405.3
• 2x Ethernet (LAN-to-LAN or switch-bridge)	UR5iv2c SL ETH WIFI	2x LAN, WIFI, 2xSIM	83.041.0465.4
• Best price-performance ratio			
• No USB interface			
• No DIO			
wienet HSPA+ UR5iv2 SL „Full“	wienet UR5iv2 SL Full		
• 2x SIM card slot	UR5iv2f SL	LAN, USB, DI, DO, 2xSIM	83.041.0400.1
• 1x Ethernet	UR5iv2f SL RS232	LAN, USB, DI, DO, 2xSIM, RS232	83.041.0401.1
• 2x RJ45 port expansion	UR5iv2f SL RS485/422	LAN, USB, DI, DO, 2xSIM, RS485/422	83.041.0402.1
• 1x USB	UR5iv2f SL MBUS	LAN, USB, DI, DO, 2xSIM, M-Bus	83.041.0403.1
• 1x DI	UR5iv2f SL CNT	LAN, USB, 5DI, 3DO, 2AI, 2xSIM	83.041.0404.1
• 1x DO	UR5iv2f SL ETH	2xLAN, USB, DI, DO, 2xSIM	83.041.0405.1
• GPS receiver (not in combination with WIFI)	UR5iv2f SL WIFI	LAN, USB, DI, DO, 2xSIM, WIFI	83.041.0460.1
	UR5iv2f SL RS232 RS232	LAN, USB, DI, DO, 2xSIM, 2xRS232	83.041.0411.1
	UR5iv2f SL RS485 RS232	LAN, USB, DI, DO, 2xSIM, RS232, RS485/422	83.041.0412.1
	UR5iv2f SL MBUS RS232	LAN, USB, DI, DO, 2xSIM, RS232, M-Bus	83.041.0413.1
	UR5iv2f SL CNT RS232	LAN, USB, 5xDI, 3xDO, 2xAI, 2xSIM, RS232	83.041.0414.1
	UR5iv2f SL ETH RS232	2xLAN, USB, DI, DO, 2xSIM, RS232	83.041.0415.1
	UR5iv2f SL RS485 RS485	LAN, USB, DI, DO, 2xSIM, 2xRS485/422	83.041.0422.1
	UR5iv2f SL MBUS RS485	LAN, USB, DI, DO, 2xSIM, RS485/422, M-Bus	83.041.0423.1
	UR5iv2f SL CNT RS485	LAN, USB, 5xDI, 3xDO, 2xAI, 2xSIM, RS485/422	83.041.0424.1
	UR5iv2f SL ETH RS485	2xLAN, USB, DI, DO, 2xSIM, RS485/422	83.041.0425.1
	UR5iv2f SL RS232 WIFI	LAN, USB, DI, DO, 2xSIM, WIFI, RS232	83.041.0461.1
	UR5iv2f SL RS485 WIFI	LAN, USB, DI, DO, 2xSIM, WIFI, RS485/422	83.041.0462.1
	UR5iv2f SL MBUS WIFI	LAN, USB, DI, DO, 2xSIM, WIFI, M-Bus	83.041.0463.1
	UR5iv2f SL CNT WIFI	LAN, USB, 5xDI, 3xDO, 2xAI, 2xSIM, WIFI	83.041.0464.1
	UR5iv2f SL ETH WIFI	2xLAN, USB, DI, DO, 2xSIM, WIFI	83.041.0465.1
	UR5iv2f SL 3-Port	3xLAN, USB, DI, DO, 2xSIM	83.041.0499.1
Delivery scope:			
VPN mobile router			
Including USB stick with documentation			
Including RJ45 patch cable			
Including DIN rail (top hat rail) adapter			
			
			
Nets			
DHCP - automatic IP address in LAN network	NAT/PAT - Network/Port Address Translation		
SNMP - network management, communication to router and its I/O and M-Bus modules	VRRP - redundant communication paths (routing)		
DynDNS - access to router if dynamic IP used	Dial-In - Dial-up router option (network) - communication via "CSD call"		
Integrated firewall (SPI)	OSPF, BGP, RIP - routing protocols (optional)		
VLAN, QoS - expanded Layer 2 network functions (optional)			
VPN tunnel			
Secure data encryption with IPSec and OpenVPN (including X.509 certificates)	Basic data transmission without encoding via GRE and L2TP tunnel		
Configuration and diagnostics			
Web interface	SMS functions		
Several profiles	Comprehensive mobile radio statistics options		
LED status display	Telnet and SSH - command line access		
Optional expansions			
Second SIM card	User (software) module - various function expansions		
Wie-Service24 - VPN server portal			
Additional functions and characteristics			
NTP client, NTP server - time synchronization	Communication via SMS - AT commands to the RS232, Ethernet and I/O interface		
Technical data			
Mounting	DIN rail (top hat rail) or table		
Operating voltage	10 - 30 V DC		
Power consumption	5.5 W max.		
Operating temperature	-30 ... +60 °C		
On-board I/O			
- PIN allocation	DO/GND/DI		
- Output (DO)	120 mA / max. 30 V		
- Input (DI)	10-30 V DC		
Dimensions (HxWxD)	42 x 80.5 x 113.5 mm		
Weight	287 g		
Antenna connector	2x SMA - 50 Ohm		
Frequency bands			
- GSM/GPRS/EDGE	800/900/1800/1900 MHz		
- UMTS	850/900/1900/2100 MHz		
Complies with standards	CE, E8		
	EN 61000-4-3, EN 61000-4-8		
	EN 55022, E8 10R-04 7056		

Industrial LAN router

Type	Interfaces	Art.No.
wienet WR-LAN v3 SL		
• High-performance CPU Cortex A8, 1 GHz (2000 DMIPS)		
• Memory: 256 MB flash memory, 512 MB RAM, 128 kB M-RAM		
• 5x Ethernet		
• 1x USB 2.0 host		
• 2x DI		
• 1x DO		
• 1x MicroSD		
• 1x WIFI/WLAN 802.11 b/g/n (optional), supports access point and client mode		
Delivery scope:		
VPN LAN router		
Including USB stick with documentation		
Including RJ45 patch cable		
Including DIN rail (top hat rail) adapter		
Networks		
DHCP - automatic IP address in LAN network	NAT/PAT - Network/Port Address Translation	
SNMP v1/v2c/v3 - Network management, communication to router and its I/O and M-Bus modules	VRRP - redundant communication paths (routing)	
PPPoE bridge	DynDNS - access to router if dynamic IP used	
IGMP, BGP, OSPF, RIP, SMTP, SMTSP	OSPF, BGP, RIP - routing protocols (optional)	
Integrated firewall (SPI)	VLAN, QoS - expanded Layer 2 network functions (optional)	
DMVPN	HTTPS, SSH, SFTP	
VPN tunnel		
Secure data encryption with IPSec and OpenVPN (including X.509 certificates)	Basic data transmission without encoding via GRE and L2TP tunnel	
EasyVPN		
Configuration and diagnostics		
Configuration and firmware update via Web interface, USB stick and central Internet server	One-CLICK reports: Current configuration, system log, routing table, reboot log, kernel log	
LED status display	Change between different configuration profiles (via Web digital input, or scheduler)	
SNMP v1/v2c/v3 - status query	Network status	
Optional expansions		
Wie-Service24 - VPN server portal	User (software) module - various function expansions	
Additional functions and characteristics		
Script programming - StartUp script, Up/Down script	NTP client, NTP server - time synchronization	
Script language Bash, Python		
Technical data		
Mounting	DIN rail (top hat rail) or table	
Operating voltage	10 - 60 V DC	
Power consumption typical / average / peak / sleep mode	2 W / 3.25 W / 4.5 W / 10 mW	
Operating temperature / storage temperature	-30 ... +60 °C / -40 ... +85 °C	
Humidity	0 ... 95 %	
Protection type	IP30	
On-board I/O		
– Output (DO)	300 mA / max. 60 V	
– 2x input (DI)	10-60 V DC	
Dimensions (HxWxD)	125 x 55 x 97	
Weight	327 g	
Antenna connector		
– WIFI antenna (optional)	R-SMA	
Technical data microSD	SDHC, SDXC	
– Supported technologies	SDHC to 32 GB, SDXC from 32 GB to 64 GB	
– Supported capacities	EN 61000-4-2 (ESD), IEC 61000-4-3 (RF field AM modulated),	
Complies with standards	EN 61000-4-4 (fast transient), EN 61000-4-5 (surge)	
	EN 61000-4-6 (RF-conducted), EN 55022, EN 61000-4-8, EN 60068-2-2, EN 60068-2-1, EN 60068-2-78, E8 10R-04	



Industrial LAN router

wienet LAN Router XR5iv2 SL

- 1x Ethernet
- 1x RJ45 port expansion
- 1x USB
- 1x DI
- 1x DO

wienet LAN Router XR5iv2 SL

„compact“

- 2x Ethernet (LAN-to-LAN or switch-bridge)
- Best price-performance ratio
- No USB interface
- No DIO

Delivery scope:

VPN LAN router
Including USB stick with documentation
Including RJ45 patch cable
Including DIN rail (top hat rail) adapter



Type	Interfaces	Art.No.
wienet XR5iv2 SL		
XR5iv2 ETH	2xLAN, USB, DI, DO	83.041.0605.1
XR5iv2 ETEH RS232	2xLAN, USB, DI, DO, RS232	83.041.0615.1
XR5iv2 ETH RS485/422	2xLAN, USB, DI, DO, RS485/422	83.041.0625.1
XR5iv2 ETH MBUS	2xLAN, USB, DI, DO, M-Bus	83.041.0635.1
XR5iv2f SL WIFI	LAN, USB, DI, DO, WIFI	83.041.0660.1
XR5iv2f SL RS232 WIFI	LAN, USB, DI, DO, WIFI, RS232	83.041.0661.1
XR5iv2f SL RS485 WIFI	LAN, USB, DI, DO, WIFI, RS485/422	83.041.0662.1
XR5iv2f SL MBUS WIFI	LAN, USB, DI, DO, WIFI, M-Bus	83.041.0663.1
XR5iv2f SL CNT WIFI	LAN, USB, 5xDI, 3xDO, 2xAI, WIFI	83.041.0664.1
XR5iv2f SL ETH WIFI	2xLAN, USB, DI, DO, WIFI	83.041.0665.1
wienet XR5iv2 SL Compact		
XR5iv2c SL ETH	2x LAN	83.041.0605.3
XR5iv2c SL ETH WIFI	2x LAN, WIFI	83.041.0665.3
Networks		
DHCP - automatic IP address in LAN network	NAT/PAT - Network/Port Address Translation	
SNMP - network management, communication to router and its I/O and M-Bus modules	VRP - redundant communication paths (routing)	
Integrated firewall (SPI)	DynDNS - access to router if dynamic IP used	
VLAN, QoS - expanded Layer 2 network functions (optional)	OSPF, BGP, RIP - routing protocols (optional)	
PPPoE - DSL modem support		
VPN tunnel		
Secure data encryption with IPSec and OpenVPN (including X.509 certificates)	Basic data transmission without encoding via GRE and L2TP tunnel	
Configuration and diagnostics		
Web interface	Several profiles	
LED status display	Telnet and SSH - command line access	
Optional expansions		
User (software) module - various function expansions	Wie-Service24 - VPN server portal	
Additional functions and characteristics		
NTP client, NTP server - time synchronization		
Technical data		
Mounting	DIN rail (top hat rail) or table	
Operating voltage	10 - 30 V DC	
Power consumption	5.5 W max.	
Operating temperature	-30 ... +60 °C	
On-board I/O		
- PIN allocation	DO/GND/DI	
- Output (DO)	120 mA / max. 30 V	
- 2x input (DI)	10-30 V DC	
Dimensions (HxWxD)	42 x 80.5 x 113.5 mm	
Weight	270 g	
Complies with standards	CE EN 61000-4-3, EN 61000-4-8 EN 55022	

Accessories


Round beam roof antenna wienet Antenna LPB-7-27		<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet Antenne 15863-v2</td><td>F0.000.0035.1</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Frequency range</td><td>GSM, GPRS, EDGE, UMTS, LTE</td></tr> <tr> <td>Connector</td><td>SMA/M</td></tr> <tr> <td>Gain</td><td>4 dBi</td></tr> <tr> <td>Cable length</td><td>5 m</td></tr> <tr> <td>Dimensions (mm)</td><td>Approx. 82 x 48 x 48</td></tr> <tr> <td>Mounting</td><td>Including mast or wall mounting bracket</td></tr> </tbody> </table>	Type	Art.No.	wienet Antenne 15863-v2	F0.000.0035.1	Technical data		Frequency range	GSM, GPRS, EDGE, UMTS, LTE	Connector	SMA/M	Gain	4 dBi	Cable length	5 m	Dimensions (mm)	Approx. 82 x 48 x 48	Mounting	Including mast or wall mounting bracket		
Type	Art.No.																					
wienet Antenne 15863-v2	F0.000.0035.1																					
Technical data																						
Frequency range	GSM, GPRS, EDGE, UMTS, LTE																					
Connector	SMA/M																					
Gain	4 dBi																					
Cable length	5 m																					
Dimensions (mm)	Approx. 82 x 48 x 48																					
Mounting	Including mast or wall mounting bracket																					
Magnetic holder for antennas with SMA/M connection wienet Antenna 15018		<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet Antenne 15018</td><td>F0.000.0036.1</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Frequency range</td><td>GSM, GPRS, EDGE, UMTS, LTE</td></tr> <tr> <td>Antenna connector</td><td>SMA/F</td></tr> <tr> <td>Cable connector</td><td>SMA/M</td></tr> <tr> <td>Cable length</td><td>2.5 m</td></tr> <tr> <td>Dimensions (H x ø)</td><td>42/50 mm</td></tr> <tr> <td>Mounting</td><td>Magnetic holder</td></tr> </tbody> </table>	Type	Art.No.	wienet Antenne 15018	F0.000.0036.1	Technical data		Frequency range	GSM, GPRS, EDGE, UMTS, LTE	Antenna connector	SMA/F	Cable connector	SMA/M	Cable length	2.5 m	Dimensions (H x ø)	42/50 mm	Mounting	Magnetic holder		
Type	Art.No.																					
wienet Antenne 15018	F0.000.0036.1																					
Technical data																						
Frequency range	GSM, GPRS, EDGE, UMTS, LTE																					
Antenna connector	SMA/F																					
Cable connector	SMA/M																					
Cable length	2.5 m																					
Dimensions (H x ø)	42/50 mm																					
Mounting	Magnetic holder																					
LTE antenna wienet Antenna 15018A		<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet Antenne 15018A</td><td>F0.000.0036.2</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Frequency range</td><td>GSM, GPRS, EDGE, UMTS, LTE</td></tr> <tr> <td>Cable connector</td><td>2x SMA/M</td></tr> <tr> <td>Gain</td><td>Max. 5 dBi</td></tr> <tr> <td>Dimensions</td><td>Height approx. 240 mm</td></tr> </tbody> </table>	Type	Art.No.	wienet Antenne 15018A	F0.000.0036.2	Technical data		Frequency range	GSM, GPRS, EDGE, UMTS, LTE	Cable connector	2x SMA/M	Gain	Max. 5 dBi	Dimensions	Height approx. 240 mm						
Type	Art.No.																					
wienet Antenne 15018A	F0.000.0036.2																					
Technical data																						
Frequency range	GSM, GPRS, EDGE, UMTS, LTE																					
Cable connector	2x SMA/M																					
Gain	Max. 5 dBi																					
Dimensions	Height approx. 240 mm																					
Vehicle antenna wienet Antenna 15869v2		<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet Antenne 15869v2</td><td>F0.000.0035.2</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Frequency range</td><td>GSM, GPRS, EDGE, UMTS, LTE</td></tr> <tr> <td>Radio technology</td><td>Supports MiMo and Diversity (no directional radio)</td></tr> <tr> <td>Cable connector</td><td>2x SMA/M</td></tr> <tr> <td>Gain</td><td>Max. 5 dBi</td></tr> <tr> <td>Cable length</td><td>2 x 5 m</td></tr> <tr> <td>Dimensions (H x ø)</td><td>82 x 176 mm</td></tr> <tr> <td>Mounting</td><td>Roof mounting</td></tr> </tbody> </table>	Type	Art.No.	wienet Antenne 15869v2	F0.000.0035.2	Technical data		Frequency range	GSM, GPRS, EDGE, UMTS, LTE	Radio technology	Supports MiMo and Diversity (no directional radio)	Cable connector	2x SMA/M	Gain	Max. 5 dBi	Cable length	2 x 5 m	Dimensions (H x ø)	82 x 176 mm	Mounting	Roof mounting
Type	Art.No.																					
wienet Antenne 15869v2	F0.000.0035.2																					
Technical data																						
Frequency range	GSM, GPRS, EDGE, UMTS, LTE																					
Radio technology	Supports MiMo and Diversity (no directional radio)																					
Cable connector	2x SMA/M																					
Gain	Max. 5 dBi																					
Cable length	2 x 5 m																					
Dimensions (H x ø)	82 x 176 mm																					
Mounting	Roof mounting																					
LTE panel antenna wienet Antenna 15862v2 High-performance outdoor antenna for LTE		<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet Antenne 15862v2</td><td>F0.000.0037.6</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Frequency range</td><td>GSM, GPRS, EDGE, UMTS, LTE</td></tr> <tr> <td>Cable connector</td><td>2x SMA/M</td></tr> <tr> <td>Gain</td><td>Max. 5 dBi</td></tr> <tr> <td>Cable length</td><td>2 x 5 m</td></tr> <tr> <td>Dimensions</td><td>186 x 155 mm</td></tr> <tr> <td>Mounting</td><td>Wall or mast mounting, including wall holder</td></tr> </tbody> </table>	Type	Art.No.	wienet Antenne 15862v2	F0.000.0037.6	Technical data		Frequency range	GSM, GPRS, EDGE, UMTS, LTE	Cable connector	2x SMA/M	Gain	Max. 5 dBi	Cable length	2 x 5 m	Dimensions	186 x 155 mm	Mounting	Wall or mast mounting, including wall holder		
Type	Art.No.																					
wienet Antenne 15862v2	F0.000.0037.6																					
Technical data																						
Frequency range	GSM, GPRS, EDGE, UMTS, LTE																					
Cable connector	2x SMA/M																					
Gain	Max. 5 dBi																					
Cable length	2 x 5 m																					
Dimensions	186 x 155 mm																					
Mounting	Wall or mast mounting, including wall holder																					
LTE panel antenna wienet Antenna 15872v2 High-performance outdoor antenna for LTE		<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet Antenne 15872v2</td><td>F0.000.0037.8</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Frequency range</td><td>GSM, GPRS, EDGE, UMTS, LTE</td></tr> <tr> <td>Cable connector</td><td>2x SMA/M</td></tr> <tr> <td>Gain</td><td>Max. 9 dBi</td></tr> <tr> <td>Cable length</td><td>2 x 5 m</td></tr> <tr> <td>Dimensions</td><td>230 x 180 mm</td></tr> <tr> <td>Mounting</td><td>Wall or mast mounting, including wall holder</td></tr> </tbody> </table>	Type	Art.No.	wienet Antenne 15872v2	F0.000.0037.8	Technical data		Frequency range	GSM, GPRS, EDGE, UMTS, LTE	Cable connector	2x SMA/M	Gain	Max. 9 dBi	Cable length	2 x 5 m	Dimensions	230 x 180 mm	Mounting	Wall or mast mounting, including wall holder		
Type	Art.No.																					
wienet Antenne 15872v2	F0.000.0037.8																					
Technical data																						
Frequency range	GSM, GPRS, EDGE, UMTS, LTE																					
Cable connector	2x SMA/M																					
Gain	Max. 9 dBi																					
Cable length	2 x 5 m																					
Dimensions	230 x 180 mm																					
Mounting	Wall or mast mounting, including wall holder																					



Accessories

Round beam Rod antenna wienet GXS606	Type wienet GXS606	Art.No. 83.041.0210.0
Technical data		
Frequency range	GSM, GPRS, EDGE, UMTS	
Connector	FME/F	
Gain	2.2 dBi	
Cable length	5 m	
Rod length (mm)	Approx. 300	
Flat antenna wienet GXR623	Type wienet GXR623	Art.No. 83.041.0200.0
Technical data		
Frequency range	GSM, GPRS, EDGE, UMTS	
Connector	SMA/M	
Gain	2.2 dBi	
Cable length	2.5 m	
Dimensions (mm)	Approx. 75 x 80 x 13	
WLAN/WIFI antenna wienet Antenna 15854v2 WIFI	Type wienet Antenne 15854v2 WIFI	Art.No. F0.000.0037.4
Technical data		
Frequency range	2.4 GHz ISM band for WIFI/WLAN, Bluetooth or Zigbee	
Connector	SMA/M-RP	
Cable	RG 174	
Gain	4.8 dBi	
Polarization	Vertical	
Resistor	50 Ohm	
Cable length	2.5 m	
Dimensions	223 x 29 mm	
Mounting	Roof mounting	
WLAN/WIFI roof or wall antenna wienet Antenna 15874v2 WIFI	Type wienet Antenne 15874v2 WIFI	Art.No. F0.000.0037.5
Technical data		
Frequency range	2.4 GHz ISM band for WIFI/WLAN, Bluetooth or Zigbee	
Connector	SMA/R	
Gain	4.8 dBi	
Resistor	50 Ohm	
Cable length	5 m	
Dimensions (mm)	Approx. 82 x 48 x 48	
Mounting	Including mast or wall mounting bracket	
Antenna extension wienet Antenna 15815v2	Type wienet Antenne 15815v2	Art.No. F0.000.0036.7
Technical data		
Connector	SMA female / SMA male	
Cable	Low-loss cable	
Cable length	10 m	

Accessories
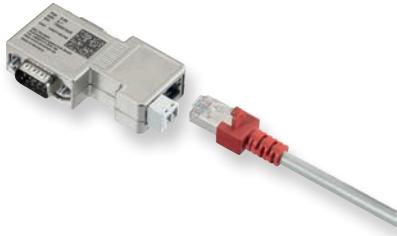
<p>Programming adapter MPI-ETH ADAPTER ACCON-NETLINK-PRO</p> 	<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>MPI-ETH ADAPTER ACCON-NETLINK-PRO</td><td>F0.000.0031.8</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Supported operating systems</td><td>No restriction</td></tr> <tr> <td>Hardware requirements</td><td>Ethernet interface and TCP/IP protocol</td></tr> <tr> <td>Supported SPS</td><td>S7-200, S7-300, S7-400</td></tr> <tr> <td>Weight in kg</td><td>Approx. 0.25</td></tr> <tr> <td>Protection type</td><td>IP 20</td></tr> <tr> <td>Operating voltage</td><td>24 V DC ± 25 %</td></tr> <tr> <td>External power supply</td><td>Yes</td></tr> <tr> <td>Max. current consumption</td><td>150 mA</td></tr> <tr> <td>Electrically isolated</td><td>Yes</td></tr> <tr> <td>Operating temperature</td><td>0 °C to 60 °C</td></tr> <tr> <td>Storage/transport temperature</td><td>-20 °C to 90 °C</td></tr> <tr> <td>Admissible relative air humidity</td><td>5 % to 85 % at 30 °C (non-condensing)</td></tr> <tr> <td>Connection cable to the PLC</td><td>Permanently mounted, active (no stub line, 1.2 m)</td></tr> <tr> <td>Connection cable to PC/router</td><td>Patch cable (Ethernet, straight, 3 m)</td></tr> <tr> <td>Supported bus profiles</td><td>MPI, DP, standard, universal (DP/FMS), user-defined, with automatic detection</td></tr> <tr> <td>Supported transmission rates from bus connection to PLC</td><td>9.6 Kbit/s to 12 Mbit/s with automatic detection</td></tr> <tr> <td>Supported Ethernet transmission rates</td><td>10/100 Mbit/s with automatic detection</td></tr> <tr> <td>Max. number of connections on TCP/IP</td><td>16</td></tr> </tbody> </table>	Type	Art.No.	MPI-ETH ADAPTER ACCON-NETLINK-PRO	F0.000.0031.8	Technical data		Supported operating systems	No restriction	Hardware requirements	Ethernet interface and TCP/IP protocol	Supported SPS	S7-200, S7-300, S7-400	Weight in kg	Approx. 0.25	Protection type	IP 20	Operating voltage	24 V DC ± 25 %	External power supply	Yes	Max. current consumption	150 mA	Electrically isolated	Yes	Operating temperature	0 °C to 60 °C	Storage/transport temperature	-20 °C to 90 °C	Admissible relative air humidity	5 % to 85 % at 30 °C (non-condensing)	Connection cable to the PLC	Permanently mounted, active (no stub line, 1.2 m)	Connection cable to PC/router	Patch cable (Ethernet, straight, 3 m)	Supported bus profiles	MPI, DP, standard, universal (DP/FMS), user-defined, with automatic detection	Supported transmission rates from bus connection to PLC	9.6 Kbit/s to 12 Mbit/s with automatic detection	Supported Ethernet transmission rates	10/100 Mbit/s with automatic detection	Max. number of connections on TCP/IP	16
Type	Art.No.																																										
MPI-ETH ADAPTER ACCON-NETLINK-PRO	F0.000.0031.8																																										
Technical data																																											
Supported operating systems	No restriction																																										
Hardware requirements	Ethernet interface and TCP/IP protocol																																										
Supported SPS	S7-200, S7-300, S7-400																																										
Weight in kg	Approx. 0.25																																										
Protection type	IP 20																																										
Operating voltage	24 V DC ± 25 %																																										
External power supply	Yes																																										
Max. current consumption	150 mA																																										
Electrically isolated	Yes																																										
Operating temperature	0 °C to 60 °C																																										
Storage/transport temperature	-20 °C to 90 °C																																										
Admissible relative air humidity	5 % to 85 % at 30 °C (non-condensing)																																										
Connection cable to the PLC	Permanently mounted, active (no stub line, 1.2 m)																																										
Connection cable to PC/router	Patch cable (Ethernet, straight, 3 m)																																										
Supported bus profiles	MPI, DP, standard, universal (DP/FMS), user-defined, with automatic detection																																										
Supported transmission rates from bus connection to PLC	9.6 Kbit/s to 12 Mbit/s with automatic detection																																										
Supported Ethernet transmission rates	10/100 Mbit/s with automatic detection																																										
Max. number of connections on TCP/IP	16																																										
<p>Switching power supply 12 V for v3 router wienet PS 12 V v3</p> 	<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet PS 12 V v3</td><td>F0.000.0037.7</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Input voltage</td><td>100-240 V AC 50/60 Hz</td></tr> <tr> <td>Output voltage</td><td>12 V DC</td></tr> <tr> <td>Output current max.</td><td>1000 mA</td></tr> </tbody> </table>	Type	Art.No.	wienet PS 12 V v3	F0.000.0037.7	Technical data		Input voltage	100-240 V AC 50/60 Hz	Output voltage	12 V DC	Output current max.	1000 mA																														
Type	Art.No.																																										
wienet PS 12 V v3	F0.000.0037.7																																										
Technical data																																											
Input voltage	100-240 V AC 50/60 Hz																																										
Output voltage	12 V DC																																										
Output current max.	1000 mA																																										
<p>Switching power supply 12 V for v2 router wienet PS 12 V v2</p> 	<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet PS 12 V v2</td><td>F0.000.0037.3</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Input voltage</td><td>100-240 V AC 50/60 Hz</td></tr> <tr> <td>Output voltage</td><td>12 V DC</td></tr> <tr> <td>Output current max.</td><td>1000 mA</td></tr> </tbody> </table>	Type	Art.No.	wienet PS 12 V v2	F0.000.0037.3	Technical data		Input voltage	100-240 V AC 50/60 Hz	Output voltage	12 V DC	Output current max.	1000 mA																														
Type	Art.No.																																										
wienet PS 12 V v2	F0.000.0037.3																																										
Technical data																																											
Input voltage	100-240 V AC 50/60 Hz																																										
Output voltage	12 V DC																																										
Output current max.	1000 mA																																										
<p>Pre-assembled 6-pole IO male with wires for v3 router wienet IO cable v3</p> 	<table border="1"> <thead> <tr> <th>Type</th><th>Art.No.</th></tr> </thead> <tbody> <tr> <td>wienet IO cable 1 m</td><td>F0.000.0037.9</td></tr> <tr> <td>wienet IO cable 3 m</td><td>F0.000.0038.0</td></tr> <tr> <td colspan="2">Technical data</td></tr> <tr> <td>Cables</td><td>CYA 0.5 mm² (2x white, 2x purple, 2x orange)</td></tr> <tr> <td>Male</td><td>WR-MPC4 for v3-router IO interface</td></tr> </tbody> </table>	Type	Art.No.	wienet IO cable 1 m	F0.000.0037.9	wienet IO cable 3 m	F0.000.0038.0	Technical data		Cables	CYA 0.5 mm² (2x white, 2x purple, 2x orange)	Male	WR-MPC4 for v3-router IO interface																														
Type	Art.No.																																										
wienet IO cable 1 m	F0.000.0037.9																																										
wienet IO cable 3 m	F0.000.0038.0																																										
Technical data																																											
Cables	CYA 0.5 mm² (2x white, 2x purple, 2x orange)																																										
Male	WR-MPC4 for v3-router IO interface																																										



M2M device management with own OpenVPN server

Wie-Service24



RJ45
GSM EDGE HSDPA HSPA+ Open VPN
HSDPA
GPRS
UMTS Ipsec
21,1 Mbit/s
Mail HSPA+
router



A perfect team


With the **wienet** VPN industrial routers from Wieland and the VPN service portal Wie-Service24, VPN communication in the cloud is child's play. Interlink everything securely and dependably – from individual devices to entire systems – this is the modular router guarantee and the cloud-based management solution Wie-Service24.

Advantages

- Security through VPN
- Automatic generation of router configuration
- Only outgoing connections to Wie-Service24 are needed
- No access to local network required
- Connection of complete networks without additional routing settings
- Less need for coordination with IT and simple commissioning
- Mobile access to all devices after router with smartphone or tablet PC
- directRemote: Direct access to each browser via an explicit URL

Wie-Service24 VPN Service Portal

All systems on the network!

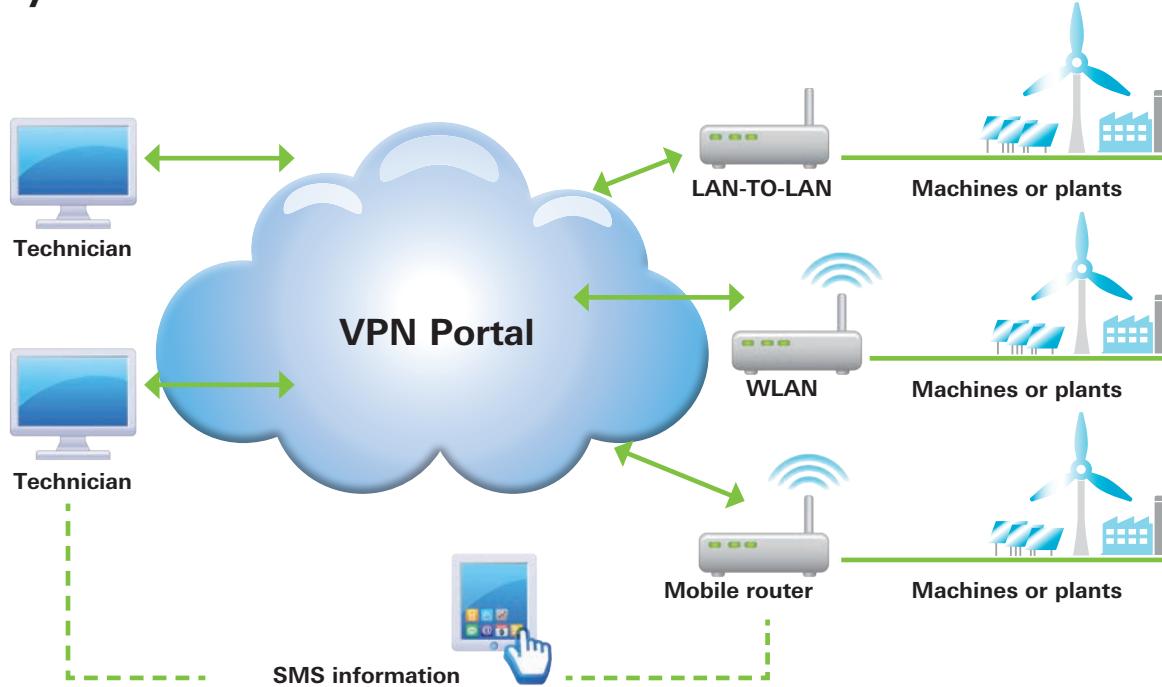

The Wie-Service24 VPN service portal is available in different variants:

The Wieland VPN server Wie-Service24 can be used for entry (up to 30 router clients / 30 PC clients) at no cost. Afterwards, additional accesses on a lease basis or installation of your own server portal are possible. Installation of the portal on virtual machine, in data center in customer RZ or data center on Internet server. The small VPN server "Smart-Service24", delivered completely installed on its own energy-saving hardware, is also suitable for entry to a server portal of your own.

	Starter kit	Single VPN client License	Virtual machine	Data center Customer RZ	Data center Internet server	Small VPN server Smart-Service24
Art.No.	ZD.000.0011.1	ZD.000.0011.0	ZD.000.0012.0	ZD.000.0015.0	ZD.000.0016.0	ZD.000.0017.0
Client access	•	•	•	•	•	•
Name	WIE-SERVICE24 30	WIE-SERVICE24 R	WIE-SERVICE24 VM	WIE-SERVICE24 DC Custom	WIE-SERVICE24 DC Internet	SMART-SERVICE24
Administration access	–	–	•	•	•	•
Server hardware from	Wieland	Wieland	Customer	Customer	Provider	Wieland
Internet connection via	Wieland	Wieland	Customer		Provider	Wieland
Installation by	Wieland	Wieland	Customer or Wieland		Wieland	Wieland (completely installed)
Number of VPN client licenses "PC"	30	1	> 1000	> 1000	> 1000	100
Number of VPN client licenses "Router"	30	1	> 1000	> 1000	> 1000	100
Cost model	No cost	Lease basis	1x fixed price*	1x fixed price*	1x fixed price*	1x fixed price

* Maintenance contract on request



Additional information is available from our Technical Service:

Phone +49 951 9324-995

Fax +49 951 9326-991

wie-service24@wieland-electric.com



VPN server "Wie-Service24"

The VPN service portal WIE-SERVICE24 ensures the secure connection of your machines and systems. Individual determination of the access rights and encoding of the VPN connections protect your machines and systems. Tedious, error-prone manual router configuration is no longer necessary. Remote access can be accomplished with any Internet-capable PC or smartphone. If the VPN connection happens to break off once, WIE-SERVICE24 reestablishes it.

VPN licenses WIE-SERVICE24	Type	Art.No.
• 30 VPN client licenses included for new router clients • Additional VPN client licenses	wienet WIE-SERVICE24-30	ZD.000.0011.1
	Complete network routing for up to 30 Wieland VPN routers, VPN client accesses for PCs and mobile end-user devices included for new customers.	
		


VPN service portal WIE-SERVICE24 full server license	Type	Art.No.
• Virtual machine • Customer server • Internet data center	wienet WIE-SERVICE24-VM	ZD.000.0012.0
	As a virtual machine for the Oracle VirtualBox, the VPN service portal WIE-SERVICE24 enables full network routing for almost any number of Wieland VPN routers. Additional virtualization environments can be established by installation from a CD. The operating system Debian GNU/Linux is a component of the installation CD/DVD.	
		
wienet WIE-SERVICE24-DC-Custom	ZD.000.0015.0	
	The VPN service portal WIE-SERVICE24, installed ready-to-operate in your data center, enables full network routing for any number of Wieland VPN routers. You can set up and manage as many VPN client accesses as you want, on your own. The client configurations are automatically generated from the VPN service portal.	
		
wienet WIE-SERVICE24-DC-Intern.	ZD.000.0016.0	
	The VPN service portal WIE-SERVICE24 in the Internet data center- our Top Seller! Installed ready-to-operate at your Internet service provider, enables full network routing for any number of Wieland VPN routers. You can set up and manage as many VPN client accesses as you want, on your own. The client configurations are automatically generated from the VPN service portal.	
		
Technical data		
VPN server portal:	– Administration and client access – Server hardware and Internet connection by customer – Installation by customer or Wieland partner – Administration via Web interface, SSL and SSH	
Firewall	– Stateful inspection firewall – Failover mechanism present	
VPN	– Max. data throughput: Wire speed – Max. number of simultaneous VPN sessions: 1000 – Number of determined VPN tunnels: 1000 – SSL/TLS – Blowfish encoding – Authentication: PKI	
Service	– Four weeks of telephone installation support – 12 months of update service	

VPN server "Smartservice24"

The compact VPN server SMARTSERVICE24 enables your easy entry to a VPN infrastructure of your own. It ensures the secure connection of your machines and systems: You are protected by individual determination of access rights and encoding of VPN connections. You set up the authorization management in seconds, individually for each device. Tedious, error-prone manual router configuration is no longer necessary. Remote access can be accomplished with any Internet-capable PC or smartphone. If the VPN connection happens to break off once, the Digiclusster reestablishes it independently.

Compact VPN server SMARTSERVICE24		Type	Art.No.
		wienet SMARTSERVICE24	ZD.000.0017.0
Features			
The compact VPN server SMARTSERVICE24, installed ready-to-operate on a small, energy-saving hardware unit, enables full network routing for up to 100 Wieland VPN routers. Also, up to 100 VPN client accesses for PCs and smartphones can be set up and managed. The client configurations are automatically generated from the VPN service portal.			
Technical data			
Software installed ready-to-operate on environmentally-friendly embedded hardware.		<ul style="list-style-type: none"> - Limited to 100 VPN tunnels - Administration and client access - Server hardware from Wieland - Internet connection by customer - Administration via Web interface, SSL and SSH 	
Firewall		<ul style="list-style-type: none"> - Stateful inspection firewall - Failover mechanism present 	
VPN		<ul style="list-style-type: none"> - Max. data throughput: Wire speed - Max. number of VPN sessions: 100 - Number of determined VPN tunnels: 100 - SSL/TLS - Blowfish encoding - Authentication: PKI 	
Service		<ul style="list-style-type: none"> - One-time feature update - 12 months of update service 	



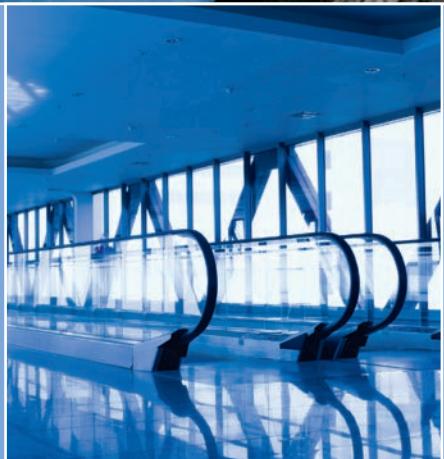



Coupling relays

The safe way to achieve a perfect interface in process applications.

In the microchip age of bits and bytes, one might assume that there is no place left for electro-mechanical relays. Far from it!

In control, transportation and production technology, coupling relays have been reliably accomplishing important tasks for years, and continue to do so.

Together with control systems, they offer numerous possibilities of making your application even safer and less sensitive to disturbances.

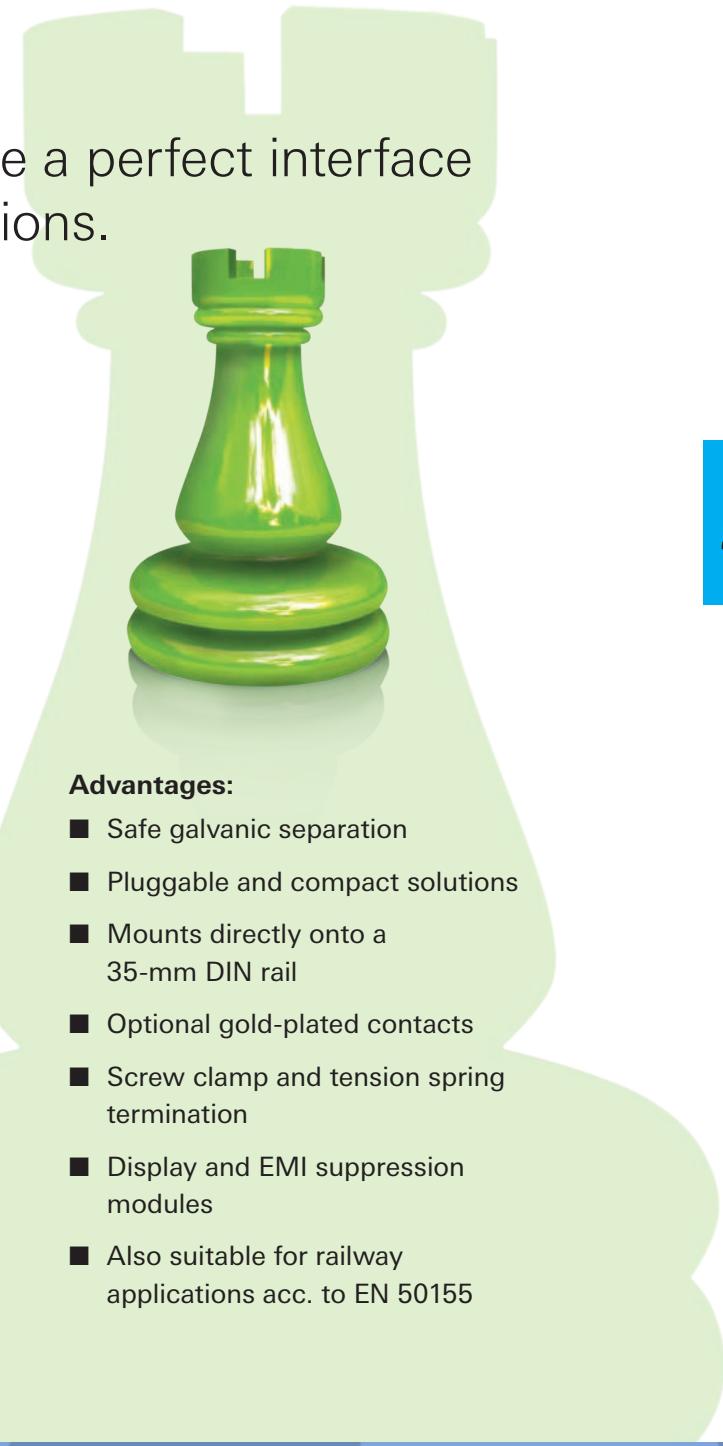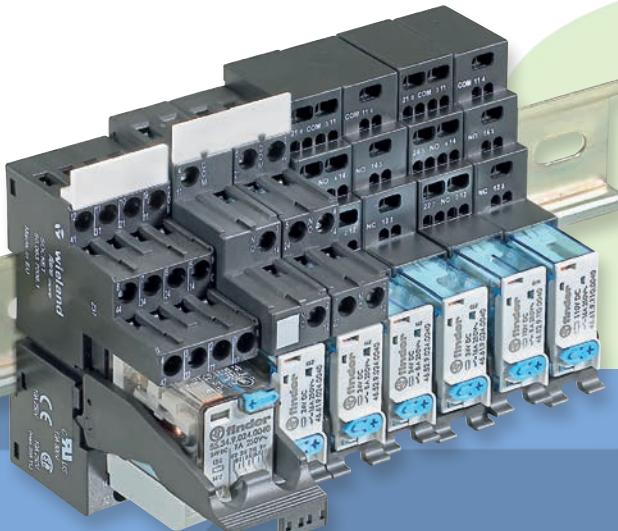

Advantages:

- Safe galvanic separation
- Pluggable and compact solutions
- Mounts directly onto a 35-mm DIN rail
- Optional gold-plated contacts
- Screw clamp and tension spring termination
- Display and EMI suppression modules
- Also suitable for railway applications acc. to EN 50155



Coupling relays

flare MOVE

- Pluggable coupling relay
- Overall width 6.2 mm
- Screw terminals
- 1 change-over contact 6A



Description	Part No.	Std. Pack	Part No.	Std. Pack
flare MOVE	AgSnO₂		AgSnO₂ + gold (5μ)	
12V Relay module DC	80.010.4501.0	10	80.010.4501.1	10
12V Relay module AC/DC	80.010.4521.0	10	80.010.4521.1	10
24V Relay module DC	80.010.4502.0	10	80.010.4502.1	10
24V Relay module AC/DC spring clamp con.	80.010.4622.0	10		
24V Relay module AC/DC	80.010.4522.0	10	80.010.4522.1	10
115V Relay module AC/DC	80.010.4525.0	10	80.010.4525.1	10
230V Relay module AC/DC	80.010.4526.0	10	80.010.4526.1	10
Comb-shaped jumper 20pol. max 36A	80.063.4029.1	10		
Marking plate BM SF38	80.063.4129.3	1		
Replacement relay and socket			Information on request	

Technical data				
Maximum switching voltage	400 V AC			
Maximum switching current	6 A AC/DC			
Maximum starting current	10 A			
Mechanical life	1 x 10 ⁷			
Electrical life up to 230 V AC / 6A	6 x 10 ⁴			
Isolation voltage of input / output	4 kV eff			
Connectable via pluggable jumper	20 modules			
Wire range fine-stranded/solid	0.14 - 1.5 mm ² (AWG 26–16) / 0.5 - 2.5 mm ² (AWG 22–14)			
Degree of protection / Mounting rail	IP 20 / TS35			
Dimensions (mm) W x H x D	6.2 x 88 x 76			
Ambient temperature	0 ... +50 °C			
Approvals	CE, UL, GS			

flare MOVE

- Pluggable coupling relay
- Overall width 15.8 mm
- Screw terminals
- 1 change-over contact 16A
- 2 change-over contacts 8A



Description	Part No.	Std. Pack	Part No.	Std. Pack
flare MOVE	1 change-over contact		2 change-over contacts	
12V Relay module DC	80.010.4901.3	10	80.010.5101.2	10
24V Relay module DC	80.010.4902.3	10	80.010.5102.2	10
24V Relay module AC	80.010.4912.3	10		
115V Relay module AC	80.010.4915.3	10	80.010.5315.2	10
230V Relay module AC	80.010.4916.3	10	80.010.5316.2	10
Comb-shaped jumper 8pol. for A1, A2 max 10A	80.063.5029.2	10		
Marking tag BZ SF-48	80.063.5029.3	10		
Replacement relay			Information on request	

Technical data				
Maximum switching voltage	400 V AC		250 V AC	
Maximum switching current	16 A / (10 A up to 12 V)		8 A	
Maximum starting current	30 A / (20 A up to 12 V)		15 A	
Mechanical life DC / AC	2 x 10 ⁷ / 1 x 10 ⁷		2 x 10 ⁷	
Electrical life AC 1	2 x 10 ⁵ / 1 x 10 ⁵		1 x 10 ⁵	
Isolation voltage of input / output	4 kV			
Connectable via pluggable jumper	8 modules			
Wire range fine-stranded/solid	0.25 - 4 mm ² (AWG 24–12) / 0.25 - 6 mm ² (AWG 24–10)			
Degree of protection / Mounting rail	IP 20 / TS35			
Dimensions (mm) W x H x D	15.8 x 78.6 x 76			
Ambient temperature	-40 ... +70 °C			
Approvals	CE, UL, GS			



Coupling relays

flare MOVE MR	Description	Part No.	Std. Pack	Part No.	Std. Pack
flare MOVE MR	1 change-over contact	2 change-over contacts			
24V Relay module DC	80.010.6002.2	10	80.010.6032.2	10	
24V Relay module DC with gold (5µm)	80.010.6002.3	10	80.010.6032.3		
Replacement relay		Information on request			
Comb-shaped jumper 8 pole for A1, A2 max 10A	80.063.5029.2	10			
Marking plate BM MR-4C	80.063.6029.3	10			
Technical data					
Maximum switching voltage	440 V AC		440 V AC		
Maximum switching current	16 A		8 A		
Maximum starting current	25 A		15 A		
Mechanical life	1×10^7		1×10^7		
Electrical life AC 1	1×10^5		1×10^5		
Isolation voltage of input / output	6 kV				
Wire range fine-stranded/solid	0.25 - 4 mm ² (AWG 24 – 12) / 0.25 - 6 mm ² (AWG 24 – 10)				
Degree of protection / Mounting rail	IP 20 / TS35				
Dimensions (mm) W x H x D	15.8 x 82.9 x 68.1				
Ambient temperature	-40...+70 °C (>12A max 50 °C)	-40...+70 °C			
Approvals	CE, UL, RoHS				



flare MOVE MR	Description	Part No.	Std. Pack	Part No.	Std. Pack
flare MOVE MR	1 change-over contact	2 change-over contacts			
24V Relay module DC	80.010.6102.2	10	80.010.6132.2	10	
24V Relay module DC with gold (5µm)	80.010.6102.3	10	80.010.6132.3		
Replacement relay		Information on request			
Marking plate BM MR-4C	80.063.6029.3	10			
Technical data					
Maximum switching voltage	400 V AC		400 V AC		
Maximum switching current	16 A		8 A		
Maximum starting current	25 A		15 A		
Mechanical life	1×10^7		1×10^7		
Electrical life AC 1	1×10^5		1×10^5		
Isolation voltage of input / output	6 kV				
Wire range fine-stranded/solid	0.2 - 1.5 mm ² (AWG 24 – 16)				
Degree of protection / Mounting rail	IP 20 / TS35				
Dimensions (mm) W x H x D	15.8 x 82.9 x 68.1				
Ambient temperature	-25...+70 °C (>12A max 50 °C)	-25...+70 °C			
Approvals	CE, UL, RoHS				



flare MOVE MR	Description	Part No.	Std. Pack
flare MOVE MR	4 change-over contact		
24V Relay module DC	80.010.5702.2		10
Replacement relay		Information on request	
Technical data			
Maximum switching voltage	250 V AC		
Maximum switching current	7 A		
Maximum starting current	15 A		
Mechanical life	2×10^7		
Electrical life AC 1	1.5×10^5		
Isolation voltage of input / output	3.6 kV		
Wire range fine-stranded/solid	0.25 - 4 mm ² (AWG 24 – 12) / 0.25 - 6 mm ² (AWG 24 – 10)		
Degree of protection / Mounting rail	IP 20 / TS35		
Dimensions (mm) W x H x D	27 x 76 x 86.9		
Ambient temperature	-40 ... +70 °C		
Approvals	CE, UL, RoHS		



Coupling relays

flare	Description	Part No.	Std. Pack	Part No.	Std. Pack
flare	Screw terminal			Cage clamp	
12V Relay module DC				80.010.4106.0	10
24V Relay module DC	80.010.4000.0	10		80.010.4100.0	10
115V Relay module AC				80.010.4131.0	10
230V Relay module AC				80.010.4141.0	10
Pluggable jumper max 2A	Z8.000.0200.8	10			
Jumper for potential distribution red	Z8.000.0202.3	5			
Jumper for potential distribution blue	Z8.000.0202.4	5			
Endcaps for jumper, red	Z8.000.0202.1	20			
Endcaps for jumper, blue	Z8.000.0202.2	20			
8 digit marking tag, unmarked, 60 pcs.	Z4.242.5153.0	10			
Technical data					
Maximum switching voltage	250 V AC / 300 V DC				
Maximum switching current	6 A AC / 2 A DC				
Maximum starting current	10 A				
Mechanical life	1×10^7				
Electrical life up to 230V AC / 6A	8×10^4				
Isolation voltage of input / output	4 kV _{eff}				
Connectable via pluggable jumper	50 modules				
Wire range fine-stranded/solid	0.5 - 2.5 mm ² (AWG 22-14) / 0.25 - 1.5 mm ² (AWG 24-16) / 0.25 - 4 mm ² (AWG 24-12)			0.25 - 2.5 mm ² (AWG 24-14)	
Degree of protection / Mounting rail	IP 20 / TS35				
Dimensions (mm) W x H x D	6.2 x 89 x 70				
Ambient temperature	0 ... +60 °C				
Approvals	CE UL cUL RoHS Ex				

flare	Description	Part No.	Std. Pack	Part No.	Std. Pack
flare	Screw terminal			Cage clamp	
24V Relay module AC/DC	80.010.4005.0	10		80.010.4105.0	10
1 change-over contact DC 48V 20mA with gold (3µm)					
24V Relay module DC				80.010.4103.0	5
2 change-over contact AC 250V 6A AC/DC 300 V 2A DC					
24V Knife edge disconnect relay AC/DC				80.010.4120.0	10
1 change-over contact AC 250V 6A / DC 300 V 2 A					
24V HAND-0-AUTO-Relay				80.010.4101.0	10
1 normally open contact AC 250V 6A / DC 300V 2A					
Technical data					
Mechanical life	2×10^7				
Electrical life up to 230V AC / 6A	6×10^4				
Isolation voltage of input / output	4 kV _{eff}				
Connectable via pluggable jumper	50 modules				
Wire range fine-stranded/solid	0.5 - 2.5 mm ² (AWG 22-14) / 0.25 - 4 mm ² (AWG 24-12)			0.25 - 1.5 mm ² (AWG 24-16) / 0.25 - 2.5 mm ² (AWG 24-14)	
Degree of protection / Mounting rail	IP 20 / TS35				
Dimensions (mm) W x H x D	6.2 x 89 x 70 / 12.4 x 89 x 70 (2 change-over contacts)				
Ambient temperature	0 +60 °C 6 mm ²				
Approvals	CE UL cUL RoHS Ex				



Coupling relays

Relay output modules

- Pluggable coupling relay
- Screw terminals
- 1 change-over contact / 2 change-over contacts
- 1 relay up to 16 relays
- 5 A switching capacity per output
- 12 V and 24 V



Description	Part No.	Std. Pack	Part No.	Std. Pack
Relay output modules		1 change-over contact	2 change-over contacts	
12V Module AC/DC 1 relay	87.220.7553.0	10		
24V Module DC 4 relay positive switching	87.220.1853.0	1	87.220.4753.3	1
24V Module DC 4 relay negative switching	87.221.5553.0	1		
24V Module DC 8 relay positive switching	87.220.1953.3	1	87.220.4853.3	1
24V Module DC 16 relay positive switching	87.220.2253.3	1		
Replacement relay	Z8.000.0056.9	10	Z8.000.0035.5	10

Technical data

Maximum switching voltage	250 V AC/DC
Maximum switching current	5 A AC/DC
Maximum starting current	8 A AC/DC
Mechanical life	3×10^7
Electrical life 230V AC / 5A	6×10^5
Isolation voltage of input / output	4 kV
Wire range fine-stranded/solid	0.25 - 2.5 mm ² (AWG 24–14) / 0.5 - 4 mm ² (AWG 22–12)
Mounting rail	TS 35 / TS 32
Dimensions (mm) W x H x D	1 relay: 12.5 x 80 x 58.3 4/8/16 relay: 70/128/280 x 80 x 71
Ambient temperature	-25 ... +50 °C (Derating)
Approvals	CE

Relay output modules

- Pluggable coupling relay
- Screw terminals
- 1 change-over contact 4 A / 2 change-over contacts 5 A
- 1 relay up to 8 relays
- 115 V and 230 V AC/DC



Description	Part No.	Std. Pack	Part No.	Std. Pack
Relay output modules		1 change-over contact	2 change-over contacts	
230 V Module AC/DC 1 relay	80.010.0011.0	10	80.010.1100.0	5
115 V Module AC/DC 4 relay	80.010.1102.0	1	80.010.1104.0	1
115 V Module AC/DC 8 relay	80.010.1110.0	1	80.010.1112.0	1
230 V Module AC/DC 4 relay	80.010.1106.0	1	80.010.1108.0	1
230 V Module AC/DC 8 relay	80.010.1114.0	1	80.010.1116.0	1
Replacement relay	Z8.000.0181.0	10	Z8.000.0176.2	10

Technical data

Maximum switching voltage	250 V AC/DC
Maximum switching current	4 A AC/DC
Maximum starting current	6 A AC/DC
Mechanical life	3×10^7
Electrical life 230V AC/nominal current	1.5×10^6
Isolation voltage of input / output	4 kV
Wire range fine-stranded/solid	0.25 - 2.5 mm ² (AWG 24–14) / 0.5 - 4 mm ² (AWG 22–12)
Mounting rail	TS 35 / TS 32
Dimensions (mm) W x H x D	1 relay: 12.5 x 80 x 70 4/8 relay: 70/128 x 80 x 71
Ambient temperature	-40 ... +50 °C (Derating)
Approvals	CE



Coupling relays

Relay system

- Bridgeable relay system
- Screw terminals
- 1 normally open contact / 1 change-over contact
- 24 V AC/DC



Description	Part No.	Std. Pack	Part No.	Std. Pack
Relay system	Output	Input		
24V Module AC/DC 1 normally open contact	80.010.0005.0	10	80.010.0007.0	10
24V Module AC/DC 1 change-over contact	80.010.0008.0	10	80.010.0009.0	10
Pluggable jumper max. 0.5A	Z8.000.0103.4	10		

Technical data				
Maximum switching voltage	250 V AC/DC	48 V DC (10 µm gold)		
Maximum switching current	5 A AC/DC	20 mA		
Maximum starting current	8 A AC/DC			
Mechanical life	3×10^7	3×10^7		
Electrical life (up to nominal rating)	2.5×10^5	3×10^6		
Isolation voltage of input / output	4 kV			
Wire range fine-stranded/solid	0.5 - 2.5 mm ² (AWG 22-14) / 0.5 - 4 mm ² (AWG 22-12)			
Mounting rail	TS 35 / TS 32			
Dimensions (mm) W x H x D	12.5 x 80 x 60			
Ambient temperature	-25 ... +50 °C (Derating up to 65 °C)			
Approvals	CE GS UL cUL FCC			

Relay system

- Bridgeable relay system
- Screw terminals
- 2 change-over contacts 5 A
- 24 V AC/DC



Description	Part No.	Std. Pack	Part No.	Std. Pack
Relay system	Output	Input		
24V Module AC/DC 2 change-over contacts	80.010.1003.0	5	80.010.1002.0	5
Pluggable jumper max. 0.5 A	Z8.000.0103.4	10		

Technical data				
Maximum switching voltage	250 V AC/DC	48 V DC (10 µm gold)		
Maximum switching current	5 A AC/DC	20 mA		
Maximum starting current	6 A AC/DC			
Mechanical life	3×10^7	3×10^7		
Electrical life (up to nominal rating)	2.5×10^5	3×10^6		
Isolation voltage of input / output	4 kV			
Wire range fine-stranded/solid	0.5 - 2.5 mm ² (AWG 22-14) / 0.5 - 4 mm ² (AWG 22-12)			
Mounting rail	TS 35 / TS 32			
Dimensions (mm) W x H x D	22.5 x 80 x 60			
Ambient temperature	-25 ... +50 °C			
Approvals	CE GS UL cUL FCC			

Relay system

- Bridgeable relay system
- Screw terminals
- 1 change-over contact 16 A
- 24 V AC/DC



Description	Part No.	Std. Pack
Relay system	Output	
24V Module AC/DC 1 change-over contact	80.010.0010.0	5
Pluggable jumper max. 0.5 A	Z8.000.0103.4	10

Technical data				
Maximum switching voltage	250 V AC/DC			
Maximum switching current	16 A AC/DC			
Maximum starting current	16 A AC/DC			
Mechanical life	3×10^7			
Electrical life (up to nominal rating)	1.8×10^5			
Isolation voltage of input / output	4 kV			
Wire range fine-stranded/solid	0.5 - 2.5 mm ² (AWG 22-14) / 0.5 - 4 mm ² (AWG 22-12)			
Mounting rail	TS 35 / TS 32			
Dimensions (mm) W x H x D	22.5 x 80 x 60			
Ambient temperature	-25 ... +50 °C (Derating up to 65 °C)			
Approvals	CE GS UL cUL FCC			



Solid-State relays

flare	Description	Part No.	Std. Pack	Part No.	Std. Pack
flare	Output 0,5 A			Output 2 A	
24 V Module DC / Output 48 V	80.020.4100.0	10	80.020.4101.0	10	
115 V Module AC/DC / Output 48 V	80.020.4102.0	10			
230 V Module AC/DC / Output 48 V	80.020.4103.0	10			
Pluggable jumper max 2 A	Z8.000.0200.8	10			
8 digit marking tag, unmarked, 60 pcs.	Z4.242.5153.0	10			
Technical data					
Maximum switching voltage	48 V DC (4,4...53 V DC)				
Maximum switching current	0.5 A	2 A			
Min. switching current	0.1 mA	1 mA			
Isolation voltage of input / output	3.75 kV				
Connectable via pluggable jumper	50 modules				
Wire range fine-stranded/solid	0.25 -1.5 (AWG 24–16) / 0.25 - 2.5 mm ² (AWG 24–14)				
Degree of protection / Mounting rail	IP 20 / TS35				
Dimensions (mm) W x H x D	6.2 x 89 x 70				
Ambient temperature	0 +50 °C (Derating)				
Approvals	CE UL cUL ULex				

flare	Description	Part No.	Std. Pack
flare	Output 0,5 A		
24V Module DC / Output 230 V AC	80.020.4150.0	10	
Pluggable jumper max 2 A	Z8.000.0200.8	10	
8 digit marking tag, unmarked, 60 pcs.	Z4.242.5153.0	10	
Technical data			
Maximum switching voltage	250 V AC		
Maximum switching current	0.5 A		
Min. switching current	0.1 mA		
Isolation voltage of input / output	2.5 kV		
Connectable via pluggable jumper	50 modules		
Wire range fine-stranded/solid	0.25 -1.5 mm ² (AWG 24–16) / 0.25 - 2.5 mm ² (AWG 24–14)		
Degree of protection / Mounting rail	IP 20 / TS35		
Dimensions (mm) W x H x D	6.2 x 89 x 70		
Ambient temperature	0 ... +50 °C (Derating)		
Approvals	CE UL cUL ULex		

Solid-state relay	Description	Part No.	Std. Pack
Solid-State-Relay	Output 5 A		
24 V Module DC / Output 48 V	80.020.2004.0	10	
Pluggable jumper	Z8.000.0103.4	10	
Technical data			
Maximum switching voltage	60 V DC (3...60 V)		
Maximum switching current	5 A DC (Derating)		
Min. switching current	20 mA		
Isolation voltage of input / output	4 kV		
Connectable via pluggable jumper	20 modules		
Wire range fine-stranded/solid	0.5 -2.5 mm ² (AWG 22–14) / 0.5 - 4 mm ² (AWG 22–12)		
Mounting rail	TS 35 / TS 32		
Dimensions (mm) W x H x D	12.5 x 80 x 59		
Ambient temperature	-20 ... +50 °C (Derating)		
Approvals	CE UL cUL ULex		

Solid-state relay	Description	Part No.	Std. Pack	Part No.	Std. Pack
Solid-State-Relay	Output 4 A			Output 6 A	
24 V Module DC / Output 250 V AC	80.020.2001.0	10	80.020.0004.0	10	
Pluggable jumper	Z8.000.0103.4	10			
Technical data					
Maximum switching voltage	280 V AC (48...280 V)				
Maximum switching current	4 A	6 A			
Min. switching current	60 mA				
Isolation voltage of input / output	4 kV				
Connectable via pluggable jumper	20 modules				
Wire range fine-stranded/solid	0.5 -2.5 mm ² (AWG 22–14) / 0.5 - 4 mm ² (AWG 22–12)				
Mounting rail	TS 35 / TS 32				
Dimensions (mm) W x H x D	12.5 x 80 x 56			25.6 x 80 x 70	
Ambient temperature	-25 ... +50 °C (Derating)				
Approvals	CE UL cUL ULex				



Passive interface

Always the right connection

Control signals are carried from prefabricated cable harnesses to terminal connections.

Interface modules make the connection between electronic and electrical components within the control panel.

The use of Wieland interface modules provides the following benefits for system wiring:

Advantages:

- Simple process which saves time during design and calculation
- Rapid wiring, commissioning and trouble shooting due to clear cabling and pole designations
- Reduction of wiring errors
- Space savings due to high density terminations
- The interface modules are standardly fitted with a mounting foot for DIN / EN mounting rails TS 35 or TS 32.

D-SUB connector to screw terminal	Type	No. of poles	With (mm)	Part No.	Std. Pack
D-Sub female connector					
Buchse D-Sub9	9	38,7	87.200.2200.3		1
Buchse D-Sub15	15	48,2	87.200.2201.3		1
Buchse D-Sub25	25	74,0	87.200.2202.3		1
Buchse D-Sub37	37	106,0	87.200.2203.3		1
D-Sub male connector					
Stecker D-Sub9	9	38,7	87.200.2205.3		1
Stecker D-Sub15	15	48,2	87.200.2206.3		1
Stecker D-Sub25	25	74,0	87.200.2207.3		1
Stecker D-Sub37	37	106,0	87.200.2208.3		1
Technical Data					
Maximum nominal voltage			60 V AC / 75 V DC		
Maximum nominal current			1.5 A		
Wire range			15 A		
fine stranded			0.5 – 2.5 mm ²		
solid			0.5 – 4 mm ²		
Ambient temperature			0 ... +50 °C		
Installation of mounting rail			TS 35 or TS 32		
Standard/specifications			VDE 0110b Gr.2		
Terminal strip X2			Type 8191E (x poles)		



Customized Solutions

INPUT

Flat ribbon cable	
D-sub	
Screw terminal	
Spring terminal	
VG strips	
AMP-Metrimate	
Flat-pin connector	
Pluggable terminal	
RJ45	
GST 18	
High-current terminal	

IMPLEMENTATION

LED	
Relay	
Optocoupler	
1 to 1	1:1
Semiconductor-relay	
Function	
Fuses	

OUTPUT

Flat ribbon cable	
D-sub	
Screw terminal	
Spring terminal	
VG strips	
AMP-Metrimate	
Flat-pin connector	
Pluggable terminal	
RJ45	
GST 18	
High-current terminal	





Analog Isolation Amplifier and flexible precise

Analog isolation amplifier of the **cores** series

The **cores** series convinces with flexible use in process and industrial automation.

They ensure a defined separation of measurement and process signals from the control system. And it protects against voltage drops.

Analogue isolation amplifiers also convert signals into standardized signal levels.

cores combines a highly precise signal conversion with a very small housing and fulfills actual demands for such products.

The Advantages:

- Digital conversion (up to 16 Bit)
- Highest accuracy (0.1 %) and linearity
- Fastest reaction time (from 11 ms)
- 3 or 4 way galvanic isolation
- High isolation voltage
- Compact housing (also as thin as 6.2 mm)
- Universal functions settable
- Wide temperature range



Analog Isolation Amplifier

cores C1 UI-B

- Analog Isolation Amplifier
- 3 way isolation
- Input: voltage / current, output: voltage / current
- High accuracy by digital conversion
- Width 6.2 mm
- Spring clamp connection
- Wide temperature range



Type	Part No.
cores C1 UI-B	82.003.0110.0
Technical data	
Input range (adjustable)	0/1 ... 5 V DC or 0/2 ... 10 V DC 0/4 ... 20 mA DC
Output range (adjustable)	0/1 ... 5 V DC or 0/2 ... 10 V DC 0/4 ... 20 mA DC or 20 ... 4/0 mA DC active or passive
Galvanic isolation	yes, 3 way isolation
Isolation voltage	1500 V AC
Accuracy	<0.1%, 14 Bit resolution
Supply voltage range	19.2 ... 30 V DC
Power consumption	max. 500 mW
Connection type	Spring clamp
Wire range solid/fine-stranded	0.2 - 2.5 mm ² (AWG 24-14)
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	6.2 x 93.1 x 102.5
Temperature range	-20 ... +65 °C
Approvals (pending)	CE, UL

cores C1 PT-B

- Analog Isolation Amplifier
- 3 way isolation
- Input: PT 100, output: voltage / current
- High accuracy by digital conversion
- Width 6.2 mm
- Spring clamp connection
- Wide temperature range



Type	Part No.
cores C1 PT-B	82.003.0120.0
Technical data	
Input range (adjustable)	PT100 with 2-, 3- or 4 wire connection -150 ... +650 °C
Output range (adjustable)	0/1 ... 5 V DC or 0 ... 10 V; 10 ... 0 V DC 0/4 ... 20 mA DC or 20 ... 4/0 mA DC
Galvanic isolation	yes, 3 way isolation
Isolation voltage	1500 V AC
Accuracy	<0.1%, 14 Bit resolution
Supply voltage range	19.2 ... 30 V DC
Power consumption	max. 500 mW
Connection type	Spring clamp
Wire range solid/fine-stranded	0.2 - 2.5 mm ² (AWG 24-14)
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	6.2 x 93.1 x 102.5
Temperature range	-20 ... +65 °C
Approvals (pending)	CE, UL

cores C1 TC-B

- Analog Isolation Amplifier
- 3 way isolation
- Input: thermo coupler, output: voltage / current
- High accuracy by digital conversion
- Width 6.2 mm
- Spring clamp connection
- Wide temperature range



Type	Part No.
cores C1 TC-B	82.003.0130.0
Technical data	
Input range (adjustable)	Types of thermo coupler: J, K, E, N, S, R, B, T
Output range (adjustable)	0/1 ... 5 V DC oder 0 ... 10 V DC 0/4 ... 20 mA DC oder 20 ... 4/0 mA DC
Galvanic isolation	yes, 3 way isolation
Isolation voltage	1500 V AC
Accuracy	<0.1%, 14 Bit resolution
Supply voltage range	19.2 ... 30 V DC
Power consumption	max. 500 mW
Connection type	Spring clamp
Wire range solid/fine-stranded	0.2 - 2.5 mm ² (AWG 24-14)
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	6.2 x 93.1 x 102.5
Temperature range	-20 ... +65 °C
Approvals (pending)	CE, UL

Analog Isolation Amplifier

cores C2 UI-A

- Analog Isolation Amplifier
- 3 way isolation
- Input: current, output: current
- High accuracy by digital conversion
- Width 17.5 mm
- Screw clamp pluggable
- Wide temperature range



Type	Part No.
cores C2 UI-A	82.003.0210.0
Technical data	
Input range (adjustable)	0 ... 20 mA DC active or passive
Output range (adjustable)	0 ... 20 mA DC active or passive
Galvanic isolation	yes, 3 way isolation
Isolation voltage	1500 V AC
Accuracy	<0.1%
Reaction time	<40 ms
Supply voltage range	9 ... 40 V DC, 19 ... 28 V AC
Power consumption	max. 2.5 W
Connection type	Screw clamp pluggable
Wire range solid/fine-stranded	0.14 - 2.5 mm ² (AWG 26-14)
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	17.5 x 100 x 112
Temperature range	-20 ... +60 °C
Approvals (pending)	CE, UL

cores C2 M-A / cores C2 MB-A

- Analog Isolation Amplifier
- 3 way isolation
- Input: voltage, current, thermo coupler, potentiometer, output: voltage, current
- High accuracy by digital conversion
- Width 17.5 mm
- Screw clamp pluggable
- Wide temperature range



Type	Part No.	Part No.
cores C2 M-A	82.003.0200.0	
cores C2 MB-A		82.003.0201.0
Technical data		
Input range (adjustable)	75 mV ... 20 V in 9 ranges (bipolar); 0 ... 20 mA (bipolar) J,K,R,S,T,B,E,N Thermo coupler; Pt100, Pt500, Pt1000, Ni100. 3 or 4 wire; 500 Ohm ... 10 kOhm Potentiometer; 500 Ohm ... 25 kOhm Rheostat	
Output range (adjustable)	0 (4) ... 20 mA, 0 ... 5 V, 0 ... 10 V, 1 ... 5 V, 2 ... 10 V	-20 ... +20 mA -10 ... +10 V
Galvanic isolation	yes, 3 way isolation	
Isolation voltage	1500 V AC	
Accuracy	<0.1%, 12 or 16 Bit resolution	
Reaction time	<35 ms (12 Bit), <140 ms (16 Bit)	
Supply voltage range	10...40 V DC, 19...28 V AC	9...40 V DC, 19...28 V AC
Power consumption	max. 2.5 W	max. 2 W
Connection type	Screw clamp pluggable	
Wire range solid/fine-stranded	0.14 - 2.5 mm ² (AWG 26-14)	
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)	
Dimensions (mm) W x H x D	17.5 x 100 x 112	
Temperature range	-10 ... +60 °C	
Approvals (pending)	CE, UL	

Configuration software can be downloaded from our homepage under service / software.

cores C2 M2-A

- Analog Isolation Amplifier
- 4 way isolation
- 2 analogue outputs
- Input: voltage, current, thermo coupler, potentiometer, output: voltage, current
- High accuracy by digital conversion
- Width 17.5 mm
- Screw clamp pluggable
- Wide temperature range



Type	Part No.	Part No.
cores C2 M2-A	82.003.0250.0	
Technical data		
Input range (adjustable)	0 ... +10V; 0 ... 20mA active or passive; J, K, R, S, T, B, E, N Thermo coupler; Pt100, Pt500, Pt1000, Ni100. 2, 3, 4 wire; 1 ... 100 kOhm Potentiometer; 500 Ohm ... 25 kOhm Rheostat	
Output range (adjustable)	0 ... 20 mA or 4 ... 20 mA active or passive 0 ... +10 V	
Galvanic isolation	yes, 4 way isolation	
Isolation voltage	1500 V AC	
Accuracy	<0.1%, 14 Bit resolution	
Reaction time	<11 ms	
Supply voltage range	10 ... 40 V DC, 19 ... 28 V AC	
Power consumption	max. 2 W	
Connection type	Screw clamp pluggable	
Wire range solid/fine-stranded	0.14 - 2.5 mm ² (AWG 26-14)	
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)	
Dimensions (mm) W x H x D	17.5 x 100 x 112	
Temperature range	-10 ... +65 °C	
Approvals (pending)	CE, UL	

Configuration software can be downloaded from our homepage under service / software.





I/O fieldbus system

Economical, compact and modular

In **ricos** FLEX, Wieland Electric is offering a continuous fieldbus concept for the interchange of data between controller and field periphery. The modular I/O nodes are installed decentrally, close to the machine, and networked via the fieldbus. A broad range of I/O modules process the various actuator/sensor signals. Diverse diagnostic functions permit a significant reduction in machine standstill times.



Advantages:

- Cost-efficiency through a highly modular design
- 2 to 8-channel modules
- Narrow module width of 12.9 mm
- Up to 64 modules can be connected to each bus coupler
- Spring tension connection terminals
- Very fast reaction time
- Individual channel inscription



contacts
are
green.
two

High-performance rear wall bus


- 48 Mbit/s transmission speed
- Very fast reaction time of up to 20 µs
- One connection module for all application modules

Easy to assemble/service

- Simplest assembly thanks to secure sliding mechanism
- Module protection through coding
- Service-friendly combination of connection module and application module
- Recommendation: top hat rail mounting (TS 35 x 15)



Clearly arranged status and diagnostic displays with direct channel assignment for fast troubleshooting.

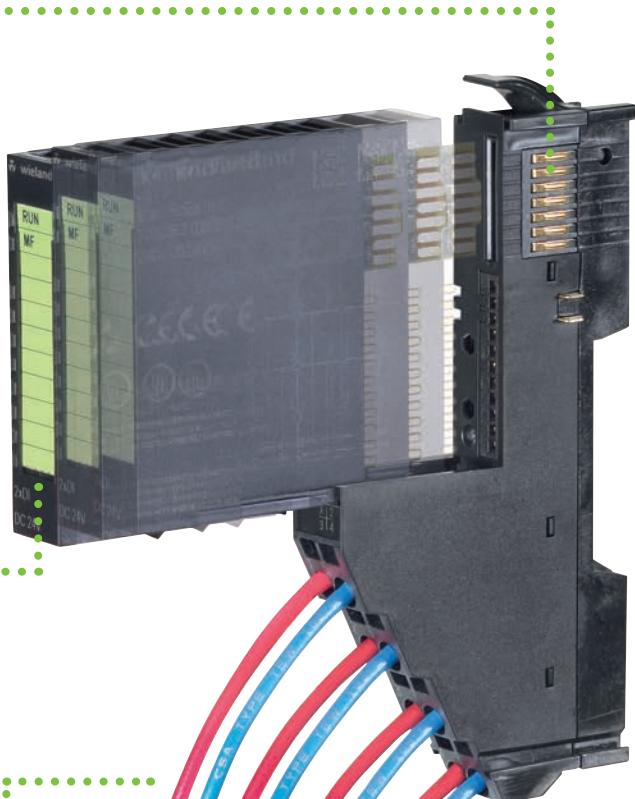**Space-saving connection technology**

- Stepped wiring level with spring force terminal technology
- Simple module replacement with permanent wiring
- High modularity with 2, 4 and 8-channel modules

Inscription strips for individual marking of each channel.



ricos FLEX

Can be combined and used for any application.

ricos FLEX is a module and extremely compact I/O system. It can be combined and used with any PLC and any IPC.

ricos FLEX combines high functionality with an intelligent housing concept in an extremely compact design.

ricos FLEX is highly compact and precisely, matched, bit by bit, to the requirements of the application concerned.


All bus couplers support up to 64 user modules. One module unit comprises a connection module and an electronic module, which are connected by means of a slide and click mechanism.

The connection module combines terminals, mounting for the electronic module and the **ricos FLEX** rear wall bus connector.

So for servicing, only the electronic module is replaced by simply pulling out the connection module – the wiring and mounting on the 25 mm DIN profile rail remain intact.

The spring force terminals arranged step-wise on the connection module permit fast, clearly arranged and safe wiring.

The integrated status LEDs and the inscription strips on the front of the electronic modules guarantee channel-specific, clear assignment and readability of the channel statuses.

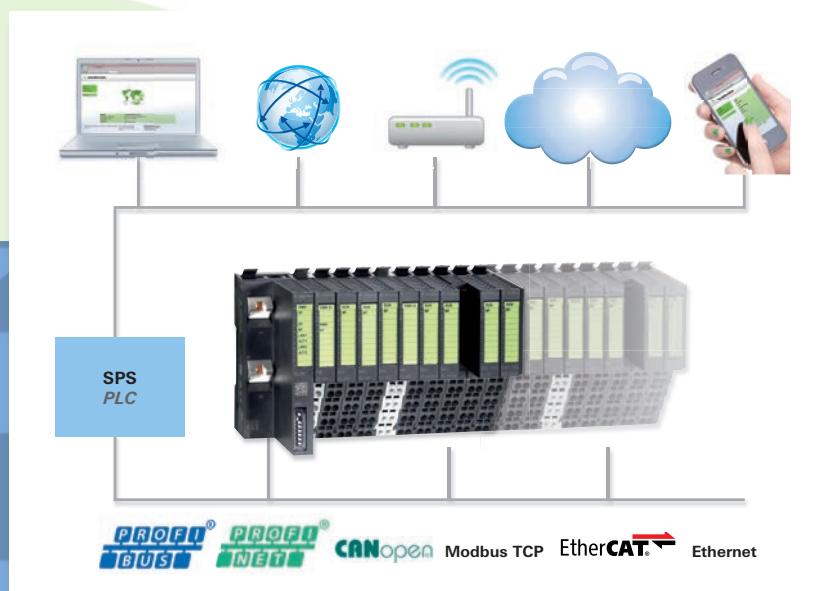

contacts
are
green.
two



Bus coupler

ricos FLEX BC DP	Type	Part No.
• Bus coupler Profibus DP-V1 Slave • 244 byte input and 244 byte output data • 64 assemblies per assembly carrier	ricos FLEX BC DP	83.036.1000.0
Technical data		
Input voltage	20.4...28.8 V DC	
Input current	0.95 A	
Number of subscribers	125	
Subscriber address	1 – 125	
Baud rate	9.6 kbit/s - 12 Mbit/s max. 244 bytes	
Address range for inputs	max. 244 bytes	
Address range for outputs	max. 244 bytes	
Fieldbus connection	9-pole sub-D socket	
Fieldbus	Profibus DP to EN50170	
Temperature range	0 ... +60 °C	
Dimensions WxHxD (mm)	48.5 x 109 x 76.5	
Mounting method	Top hat rail mounting	
Weight	155 g	
Terminal type	Spring force terminal	
Terminal cross-section	0.08 – 1.5 mm ²	
Approvals	 	

ricos FLEX BC CANopen	Type	Part No.
• Bus coupler CANopen Slave • 16 RX and 16 TX PDOs • 2 SDOs • PDO linking • PDO Mapping: fixed • 64 assemblies per assembly carrier	ricos FLEX BC CANopen	83.036.1020.0
Technical data		
Input voltage	20.4...28.8 V DC	
Input current	0.95 A	
Number of subscribers	127	
Subscriber address	1 – 127	
Baud rate	10 kBaud - 1 MBaud max. 128 bytes	
Address range for inputs	max. 128 bytes	
Address range for outputs	max. 128 bytes	
Fieldbus connection	9-pole sub-D plug	
Fieldbus	CANopen	
Temperature range	0 ... +60 °C	
Dimensions WxHxD (mm)	48.5 x 109 x 76.5	
Mounting method	Top hat rail mounting	
Weight	155 g	
Terminal type	Spring force terminal	
Terminal cross-section	0.08 – 1.5 mm ²	
Approvals	 	

ricos FLEX BC MODBUS	Type	Part No.
• Bus coupler MODBUS TCP Slave • I/O configuration via the fieldbus • 64 assemblies per assembly carrier	ricos FLEX BC MODBUS	83.036.1040.0
Technical data		
Input voltage	20.4...28.8 V DC	
Input current	0.95 A	
Fieldbus connection	RJ45 / Ethernet 10/100 MBit	
Fieldbus	MODBUS-TCP	
Temperature range	0 ... +60 °C	
Dimensions WxHxD (mm)	48.5 x 109 x 76.5	
Mounting method	Top hat rail mounting	
Weight	155 g	
Terminal type	Spring force terminal	
Terminal cross-section	0.08 – 1.5 mm ²	
Approvals	 	

Bus coupler

ricos FLEX BC PROFINET

- Bus coupler PROFINET I/O Slave
- Transmission rate 100 MBit/s
- 64 assemblies per assembly carrier



Type	Part No.
------	----------

ricos FLEX BC PROFINET

83.036.1010.0

Technical data

Input voltage	20.4...28.8 V DC
Input current	0.95 A
Baud rate	100 Mbit/s
Address range for inputs	512 bytes
Address range for outputs	512 bytes
Fieldbus connection	2 x RJ45 / Ethernet 100 MBit
Fieldbus	PROFINET-IO
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	48.5 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	155 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	

ricos FLEX BC EtherNet/IP

- Bus coupler EtherNet/IP
- 1 KB input and 1 KB output data
- 64 assemblies per assembly carrier



Type	Part No.
------	----------

ricos FLEX BC EtherNet/IP

83.036.1050.0

Technical data

Input voltage	20.4...28.8 V DC
Input current	0.95 A
Baud rate	10/100 Mbit
Address range for inputs	max. 1KB
Address range for outputs	max. 1KB
Fieldbus connection	RJ45
Fieldbus	EtherNet/IP
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	48.5 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	155 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	

ricos FLEX BC EtherCAT

- Bus coupler EtherCAT
- 512 Byte input and 512 Byte output data
- 64 assemblies per assembly carrier



Type	Part No.
------	----------

ricos FLEX BC EtherCAT

83.036.1060.0

Technical data

Input voltage	20.4...28.8 V DC
Input current	0.95 A
Number of participants	max. 65535
Baud rate	100 Mbit/s
Address range for inputs	max. 512 Byte
Address range for outputs	max. 512 Byte
Fieldbus connection	2 x RJ45
Fieldbus	EtherCAT
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	48.5 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	155 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	



Expansion modules

ricos FLEX potential distributor	
Type	Part No.
ricos FLEX PV 8xDC24V	83.036.0000.0
ricos FLEX PV 8xDC0V	83.036.0010.0
ricos FLEX PV 4xDC24V 4xDC0V	83.036.0020.0
Technical data	
Number of terminals	8 x 24 V DC 8 x 0 V DC 4 x 24 VDC; 4 x 0 V DC
Max. terminal voltage	30 V DC 0 V DC 30 V DC
Max. terminal current	10 A
Max. total current per module	10 A
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	12.9 x 109 x 52.5
Mounting method	Top hat rail mounting
Weight	50 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	



ricos FLEX power module	
Type	Part No.
ricos FLEX PW DC 24V	83.036.0030.0
ricos FLEX PW 24V/5V	83.036.0040.0
Technical data	
Input voltage	20.4...28.8 V DC
Output voltage	24 V
Output current	10 A 4 A
Reverse polarity protection	yes
Oversupply protection	36 V
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	12.9 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	60 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	



ricos FLEX digital input module	
Type	Part No.
ricos FLEX 2xDI DC24V	83.036.2100.0
ricos FLEX 4xDI DC24V	83.036.2200.0
ricos FLEX 8xDI DC24V	83.036.2300.0
Technical data	
Input voltage	20.4...28.8 V DC
Input current with signal 1	3 mA
Number of inputs	2 4 8
Switching level "0"	0...5 V DC
Switching level "1"	15...28,8 V DC
Channel status (high)	LED (green)
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	12.9 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	60 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	



Expansion modules

ricos FLEX digital output module

- Digital output module
- 2 / 4 / 8 outputs
- 2 relay outputs 30 V DC / 230 V AC; 3 A



Type	Part No.
ricos FLEX 2xDO DC24V 0,5A	83.036.3100.0
ricos FLEX 2xDO DC24V 2A	83.036.3110.0
ricos FLEX 2xDO DC30V 3A RELAY	83.036.3150.0
ricos FLEX 4xDO DC24V 0,5A	83.036.3200.0
ricos FLEX 4xDO DC24V 2A	83.036.3210.0
ricos FLEX 8xDO DC24V 0,5A	83.036.3300.0

Technical data	
Output voltage	20,4...28,8 V DC 30 V DC/ 230 V AC (Relay)
Output current with signal 1	0,5 A (2/4/8 DO), 2 A (2/4 DO), 3 A (Relay)
Number of outputs	2 2 2 x RELAY 4 4 8
Output protection	Short circuit and overload protection
Channel status (high)	LED (green)
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	12.9 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	60 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	CE

ricos FLEX analog input module

- Analog input module
- 4 inputs, 12 bit
- 4 wire, isolated



Type	Part No.
ricos FLEX 4xAI 12BIT 0...10V	83.036.4200.0
ricos FLEX 4xAI 12BIT 0(4)...20mA	83.036.4240.0
ricos FLEX 4xAI 12BIT -10V...+10V	83.036.4210.0
ricos FLEX 4xAI 16BIT R ,RTD	83.036.4261.0

Technical data	
Number of inputs	4 4 4 4
Measuring ranges	0...10 V 0(4)...20 mA -10 V...+10 V RTD,PT100
Auflösung in Bit	12 12 12 16
Conversion time	1.15 ms, all channels
Module status	LED (green)
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	12.9 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	60 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	CE

ricos FLEX analog output module

- Analog output module
- 4 outputs, 12 bit



Type	Part No.
ricos FLEX 4xAO 12BIT 0...10V	83.036.5200.0
ricos FLEX 4xAO 12BIT 0(4)...20mA	83.036.5220.0
ricos FLEX 4xAO 12BIT -10V...+10V	83.036.5210.0

Technical data	
Number of outputs	4 4 4
Measuring ranges	0...10 V 0(4)...20 mA -10 V...+10 V
Resolution in bits	12
Conversion time	2 ms, all channels
Module status	LED (green)
Temperature range	0 ... +60 °C
Dimensions WxHxD (mm)	12.9 x 109 x 76.5
Mounting method	Top hat rail mounting
Weight	60 g
Terminal type	Spring force terminal
Terminal cross-section	0.08 – 1.5 mm ²
Approvals	CE





Timers

Always up to the minute

The electronic relays are ideally suited for standard, monitoring and control tasks in order to control function processes down to the second. Depending on the application, multiple-voltage and multi-functional relays are available.

Decades of timer know-how are packed into a completely new, highly miniaturized generation of timers just 22.5 mm wide. Although the end of the timer has been being predicted for years now, as the PLC has spread, high quality timers with well thought-out designs and universal application will continue to be needed in industrial automation.



Timers remain crucial – in less complex series machines, in later modifications, everywhere where other solutions would result in unnecessary engineering and hardware costs. For these applications Wieland offers a range of timers that provides everything you need. These devices unite diverse features with an efficiency that permits the fullest profitability – from procurement and warehousing through application and operation, and finally to disposal.



contacts
are
green.
Wieland

Multiple-voltage ergonomic and mobile

flare TIME series of timer relays


Our **flare** TIME family features universal application in the industrial automation sector. Up to 8 functions in just one relay cover all of your requirements and reduce inventory costs as well. Existing production processes can be easily expanded thanks to our **flare** TIME timer relay series, without incurring additional engineering and hardware costs. Our timer relays can be used in bakery machines, industrial washing machines, elevators and escalators, access controls and much more.

Features:

- Ambient temperatures from -25 °C to +60 °C
- Very high interference voltage resistance
- Output relays correspond to utilization category AC-15 and DC-13

The advantages:

- ① Power LED with progress display
- ② Function setting
- ③ Time range setting
- ④ Clear time setting
- ⑤ LED as status indicator of the change-over contact
- ⑥ Double connection points internally connected (HM series)

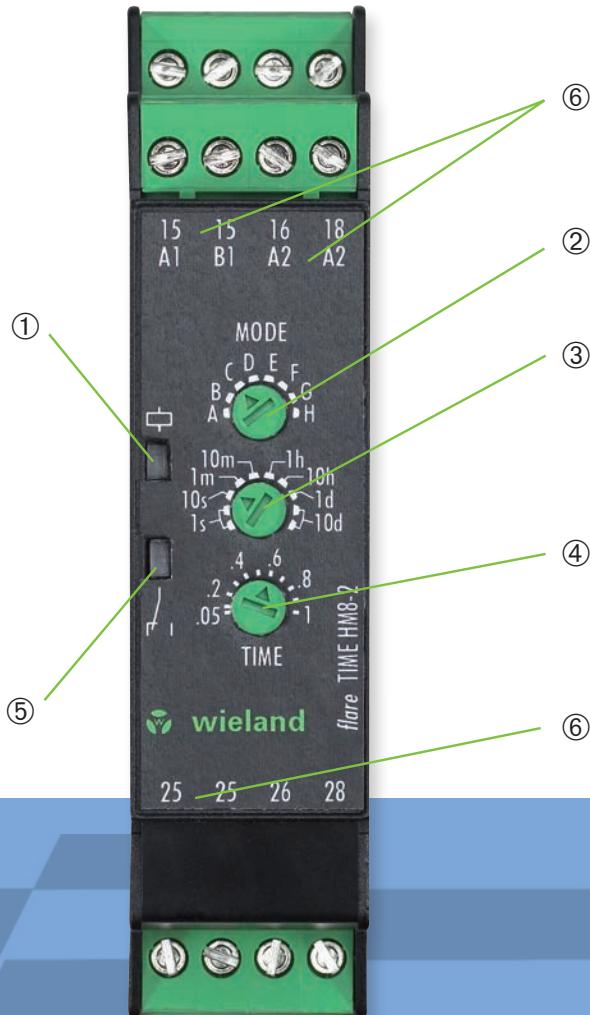



**Electronic timer and switching relays
for DIN rails**



**Electronic timer and switching relays
for panel mounting**



**Electronic latching relay
for top hat rail**

! Further products and technical details can be found at
www.wieland-electric.com in our e-catalog.

W
contacts
are
green.



Electronic timer and switching relays for DIN rails multifunction

Description										
Part no.										
Model	Multi-function	•	•	•	•	•	•	•	•	•
Model	Multi-range	•	•	•	•	•	•	•	•	•
Function										
Timer relays	ON-delay	•	•	•	•	•	•	•	•	•
	OFF-delay	•	•	•	•	•	•	•	•	•
	ON-delay- and OFF-delay, symmetrical	•	•	•	•	•	•	•	•	•
Interval ON relay	Interval ON	•	•	•	•	•	•	•	•	•
	Single shot 0.5 sec (rising edge)	•								
	Interval OFF	•								
	Interval ON and Interval OFF	•	•	•	•	•	•	•	•	•
Repeat cycle timer	OFF start, symmetrical and selectable	•	•	•	•	•	•	•	•	•
	ON start, symmetrical and selectable	•	•	•	•	•	•	•	•	•
Watchdog	Cyclical signal monitoring	•								
Pulse relay	Pulse relay, ON-delay, Pulse output	•	•	•	•	•	•	•	•	•
	Change relaystate (rising edge)	•								
	Invert relay state (rising edge)	•								
Contacts	Delayed changeover	2	1	2	1	1	2 ¹⁾	1	2 ¹⁾	1
	Immediate changeover		1		1		1 ¹⁾		1 ¹⁾	
Rated Voltage	Multi-voltage AC/DC 24 to 230 (240) V	•	•	•	•	•	•	•	•	•
Special Features	Remote potentiometer connection		•	•						
	Double connection points (internally connected) for trough cabling	•	•	•	•	•				
	Digital (D) or analog (A) settings	A	A	A	A	A	A	A	A	A
Housing	Surface mounting	22.5 mm	•	•	•	•	•	•	•	•
flare TIME HM8-2-A										
flare TIME HM8-2U-A										
flare TIME HM8-2P-A										
flare TIME HM8-2PS-A										
flare TIME HM5-1-A										
flare TIME M8-2										
flare TIME M8-1										
flare TIME M4-2										
flare TIME M4-1										
flare TIME-S										

1) = 1 delayed and 1 immediate changeover or 2 delayed changeovers, adjustable



Electronic timer and switching relays for DIN rails

flare TIME M	Type	Part No.
	flare TIME M4-1 (4 time functions / 1 contact)	81.020.0000.0
	flare TIME M4-2 (4 time functions / 2 contacts)	81.020.0001.0
	flare TIME M8-1 (8 time functions / 1 contact)	81.020.0002.0
	flare TIME M8-2 (8 time functions / 2 contacts)	81.020.0003.0

Technical data	
Input voltage range	20,4 ... 264 V AC/DC
Time range	0,1 s ... 1200 h
Time functions	4 or 8
Number of change-over contacts	1 or 2
Maximum switching current	5 A
Mechanical life time	10×10^6
Electrical life time AC1	$0,1 \times 10^6$
Isolation voltage of input/output	2 kV
Connection clamps	Screw clamp
Wire range fine-stranded/solid	0,14 - 2,5 mm ² (AWG 26-14)
Degree of protection / mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	22,5 x 89,4 x 100
Operation temperature range	-20 ... +55 °C
Approvals	CE, UL, cUL, RoHS



flare TIME HM	Type	Part No.
	flare TIME HM5-1-A (5 time functions / 1 contact)	81.020.0100.0
	flare TIME HM8-2-A (8 time functions / 2 contacts)	81.020.0104.0
	flare TIME HM8-2U-A (4 time- / 4 special functions / 2 contacts)	81.020.0105.0
	flare TIME HM8-2P-A (with remote control connection)	81.020.0134.0

Technical data	
Input voltage range	20,4 ... 264 V AC/DC
Time range	0,05 s ... 240 h
Time functions	5 or 8
Number of change-over contacts	1 or 2
Maximum switching current	5 A
Mechanical life time	20×10^6
Electrical life time AC1	$0,1 \times 10^6$
Isolation voltage of input/output	2 kV
Connection clamps	Pluggable screw clamp
Wire range fine-stranded/solid	0,2 - 2,5 mm ² (AWG 24-14)
Degree of protection / mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	22,5 x 96,5 x 91,5
Operation temperature range	-40 ... +60 °C
Approvals	CE, UL, cUL, RoHS

Accessoires	
Remote control	F0.000.0031.9



flare TIME TWIN-1	Type	Part No.
	flare TIME TWIN-1	81.020.0011.0

Technical data	
Input voltage range	20,4 ... 264 V AC/DC
Time range	0,1 s ... 1200 h
Time functions	ON- or OFF-start
Number of change-over contacts	1
Maximum switching current	5 A
Mechanical life time	10×10^6
Electrical life time AC1	$0,1 \times 10^6$
Isolation voltage of input/output	2 kV
Connection clamps	Screw clamp
Wire range fine-stranded/solid	0,14 - 2,5 mm ² (AWG 26-14)
Degree of protection / mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	22,5 x 89,4 x 100
Operation temperature range	-20 ... +55 °C
Approvals	CE, UL, cUL, RoHS

Accessoires	
Remote control	F0.000.0031.9



Electronic timer and switching relays for DIN rails

flare TIME OFF-1	Type	Part No.
<ul style="list-style-type: none"> • OFF delayed timer • No auxiliary voltage necessary • 2 time ranges setable • 1 change-over contacts 5 A 	flare TIME OFF-1	81.020.0010.0
Technical data		
Input voltage range	170 ... 264 V AC	
Time range	1 ... 120 s	
Time functions	OFF delay	
Number of change-over contacts	1	
Maximum switching current	5 A	
Mechanical life time	10×10^6	
Electrical life time AC1	0.1×10^6	
Isolation voltage of input/output	2 kV	
Connection clamps	Screw clamp	
Wire range fine-stranded/solid	0.14 - 2.5 mm ² (AWG 26-14)	
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)	
Dimensions (mm) W x H x D	22.5 x 89.4 x 100	
Operation temperature range	-20 ... +55 °C	
Approvals	CE  	



flare TIMER-S / flare TIMER-A	Type	Part No.
<ul style="list-style-type: none"> • Spring clamp • Width 6.2 mm • 1 change-over contacts 6 A <p>Multi-function timer flare TIMER-S</p> <ul style="list-style-type: none"> • ON-delay and OFF-delay • One shot and flashing <p>Timer flare TIMER-A</p> <ul style="list-style-type: none"> • ON-delay 	flare TIMER-S-250250V6A flare TIMER-A/0100-S-250V6A flare TIMER-A/0060-S-250V6A	81.020.4100.0 81.020.4101.0 81.020.4102.0
Technical data		
Input voltage range	24 V DC +25%/-20%	
Time range flare TIMER-S	0.1 ... 300 s	
Time range flare TIMER A/0100	1 ... 100 s	
Time range flare TIMER A/0060	1 ... 100 min	
Number of change-over contacts	1	
Maximum switching current	6 A	
Mechanical life time	2×10^7	
Electrical life time at 24 V DC / 2 A	0.6×10^6	
Electrical life time at 230 V AC / 6 A	0.8×10^5	
Isolation voltage of input/output	4 kV	
Connection clamps	Spring clamp	
Wire range fine-stranded/solid	0.25 - 1.5 mm ² (AWG 24-16) / 0.25 - 2.5 mm ² (AWG 24-14)	
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)	
Dimensions (mm) W x H x D	6.2 x 89 x 70mm	
Operation temperature range	0 ... +50 °C	
Approvals	  	



Electronic time relay for front panel mounting


flare TIME FM15-1		Type	Part No.	Part No.
flare TIME FM15-1 (24 V)		81.020.0020.0		
flare TIME FM15-1 (230 V)			81.020.0021.0	
Technical data				
Input voltage range	4.5...30 V DC	85...264 V AC/DC		
Time range	0.001 s ... 999 h			
Time functions	15			
Number of change-over contacts	1			
Maximum switching current	5 A			
Mechanical life time	10 x 10 ⁶			
Electrical life time AC1	0.1 x 10 ⁶			
Isolation voltage of input/output	2 kV			
Connection clamps	Screw clamp			
Wire range fine-stranded/solid	0.14 - 2.5 mm ² (AWG 26-14)			
Degree of protection	IP20 / IP 66 (optional)			
Dimensions (mm) W x H x D	48 x 48 x 65	48 x 48 x 85,5		
Operation temperature range	-10 ... +55 °C			
Approvals	CE	UL		



Electronic latching relay for top hat rail

flare TRIGGER		Type	Part No.	Part No.
flare TRIGGER		81.010.0012.0		
Technical data				
Rated control voltage, U _N	220 V DC (0.8 to 1.1 x U _N)			
Power consumption	max. 5.5 W			
3 control inputs: A1/A2 = "Excitation" B1/B2 and R1/R2 = "Counter-excitation"	A1/A2 and B1/B2, locking upon continuous signal			
Output circuit	4 Wechsler			
Switching voltage	max. 250 V AC/DC			
Switching current	min. 10 mA / max. 10 A			
Continuous current	max. 5 A			
Connection terminals	Screw terminal			
Connector cross-section	2 x 2,5 mm ² solid 2 x 1,5 mm ² stranded with sleeve			
Protection type, housing/connection terminal.	IP40 / IP10 (IP20 with cover)			
Mounting rail	TS 35 (EN60715)			
Dimensions (mm) W x H x D	100 x 78 x 114			
Operation temperature range	-30 ... +50 °C			
Approvals	CE			



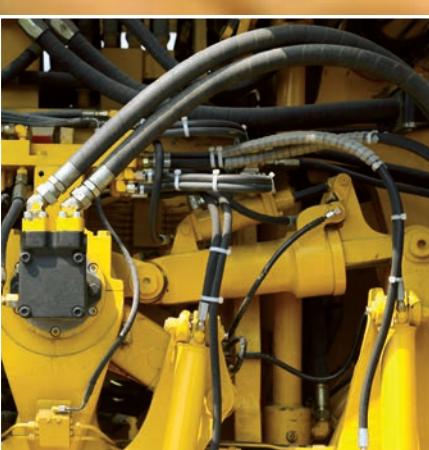

Measuring & control

precise and safe


Always live

Electronic measuring and monitoring relays for measuring input values such as current, voltage, 3-phases, cos phi, temperature. They carry out both simple and complex monitoring in machines and systems.



Features:

- The optimum device for every monitoring task
- Voltage, current, phase sequence, phase error, temperature or cos phi
- Broad temperature range
- Gold-plated switching contacts for maximum operational reliability

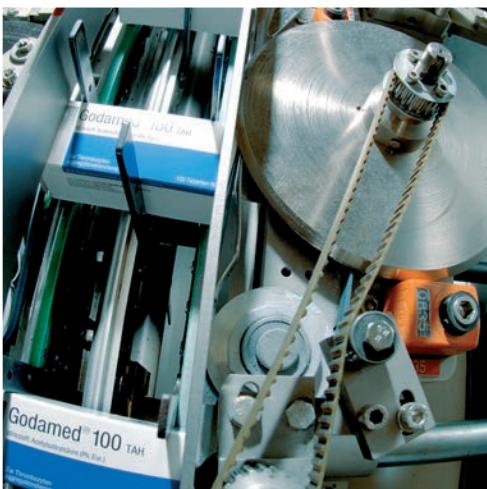

Benefits

- Upper and lower threshold separately adjustable
- 3 measuring ranges (single phase)
- Closed circuit or operating circuit principle
- Time delay 0 ... 10 s adjustable
- Wide input voltage range 20.4 ... 264 V AC/DC
- Width 22.5 mm
- Pluggable screw clamps
- Wide temperature range



Multi-functional measuring relay

economical
and flexible

Measuring relays **flare** CONTROL


The product family **flare** CONTROL convinces by the universal use in industrial automation.

All functions required for measuring relays are combined in one device. Only one type for current and voltage measurement is necessary.

This simplifies engineering and reduces stock.

Features:

- ① 3 measuring ranges in one device
- ② Power LED
- ③ Adjustable for closed circuit or operating circuit principle
In addition also time delay for exceeding the threshold
- ④ LED for exceedance of the threshold value
- ⑤ One terminal for supply voltage
- ⑥ Upper threshold in percent of measuring range
- ⑦ Lower threshold in percent of upper threshold
- ⑧ 2 changeover contacts simultaneously switching, one changeover contact output per terminal

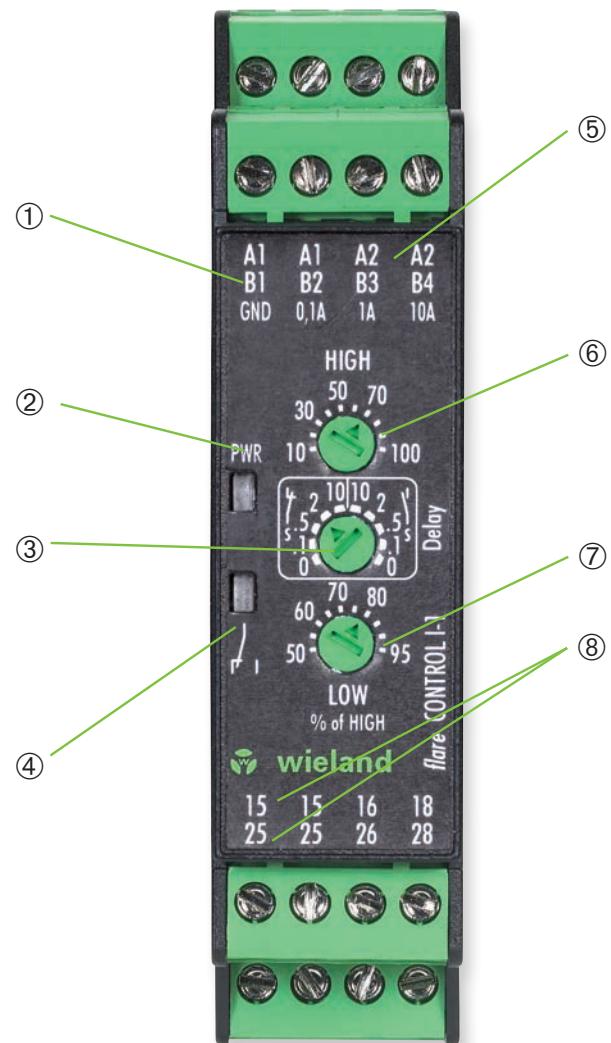

Measuring relay

flare CONTROL U-1-A | UL-1-A

- Multi-function measuring relay
- Upper and lower threshold separately adjustable
- 3 measurement ranges (single phase)
- Signal shape DC and sinus
- Closed circuit or operating circuit principle
- Response delay at threshold exceedance/ undercut adjustable
- Wide input voltage range 20.4 ... 264 V AC/DC
- Width 22.5 mm
- Pluggable screw clamps
- Wide temperature range
- 2 change-over contacts 5 A



Type	Part No.
Threshold exceedance flare CONTROL U-1-A	81.030.0100.0
Threshold undercut flare CONTROL UL-1-A	81.030.0101.0
Technical data	
Measuring ranges	5 / 50 / 300 V
Upper threshold U-1-A UL-1-A	10...100 % of measuring range
Lower threshold U-1-A	50 ... 95 % of upper threshold
Lower threshold UL-1-A	10...100 % of measuring range
Signal shape	DC and sinus
Nominal frequency of measured signal at AC	45 ... 400 Hz
Nominal power	app. 2 W / 4 VA
Supply voltage range	20.4 ... 264 V AC/DC
Galvanic isolation toward supply	Yes
Functions	Closed circuit or operating circuit principle
Time delay adjustable	0 / 0.1 / 0.5 / 2 / 10 s
Number of change-over contacts	2 (simultaneously switching)
Maximum switching current	5 A
Mechanical life time	20 x 10 ⁶
Electrical life time AC1	0.1 x 10 ⁶
Isolation voltage of input/output	2 kV
Connection clamps	Pluggable screw clamp
Wire range fine-stranded/solid	0.2 - 2.5 mm ² (AWG 24-14)
Degree of protection / mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	22.5 x 96.5 x 114
Operation temperature range	-25 ... +55 °C
Approvals U-1-A UL-1-A	CE UL CE

flare CONTROL I-1-A | IL-1-A

- Multi-function measuring relay
- Upper and lower threshold separately adjustable
- 3 measuring ranges (single phase)
- Signal shape DC and sinus
- Closed circuit or operating circuit principle
- Response delay at threshold exceedance/ undercut adjustable
- Wide input voltage range 20,4 ... 264 V AC/DC
- Width 22.5 mm
- Pluggable screw clamps
- Wide temperature range
- 2 change-over contacts 5 A



Type	Part No.
Threshold exceedance flare CONTROL I-1-A	81.030.0110.0
Threshold undercut flare CONTROL IL-1-A	81.030.0111.0
Technical data	
Measuring ranges	0,1 / 1 / 10 A
Upper threshold I-1-A IL-1-A	10...100 % of measuring range
Lower threshold I-1-A	50 ... 95 % of upper threshold
Lower threshold IL-1-A	10...100 % of measuring range
Signal shape	DC and sinus
Nominal frequency of measured signal at AC	45 ... 400 Hz
Nominal power	ca. 2 W / 4 VA
Supply voltage range	20.4 ... 264 V AC/DC
Galvanic isolation toward supply	Yes
Functions	Closed circuit or operating circuit principle
Time delay adjustable	0 / 0.1 / 0.5 / 2 / 10 s
Number of change-over contacts	2 (simultaneously switching)
Maximum switching current	5 A
Mechanical life time	20 x 10 ⁶
Electrical life time AC1	0.1 x 10 ⁶
Isolation voltage of input/output	2 kV
Connection clamps	Pluggable screw clamp
Wire range fine-stranded/solid	0.2 - 2.5 mm ² (AWG 24-14)
Degree of protection / mounting rail	IP 20 / TS 35 (EN60715)
Dimensions (mm) W x H x D	22.5 x 96.5 x 114
Operation temperature range	-25 ... +55 °C
Approvals I-1-A IL-1-A	CE UL CE



Monitoring relay


flare CONTROL P3-L	Type	Part No.
<ul style="list-style-type: none"> • 3 phase monitoring relay • Detection for loss of one or more phases • Detection of wrong phase sequence • Closed circuit principle • Width 22.5 mm • 2 change-over contacts 5 A 	flare CONTROL P3-L	81.030.0020.1
Technical data		
Supply voltage range	200 ... 480 V AC	
Detection time	max. 0.1 s	
Number of change-over contacts	2	
Maximum switching current	5 A	
Mechanical life time	10×10^6	
Electrical life time AC1	0.05×10^6	
Connection clamps	Screw clamp	
Wire range fine-stranded/solid	0.14 - 4 mm ² (AWG 26-12)	
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)	
Dimensions (mm) W x H x D	22.5 x 100 x 100	
Operation temperature range	-20 ... +60°C	
Approvals	CE, UL	



flare CONTROL P3-LTN	Type	Part No.
<ul style="list-style-type: none"> • 3 phase monitoring relay • 3 or 4 wire monitoring • Detection for loss of one or more phases • Detection of wrong phase sequence • Adjustable asymmetry trigger 3 wire • Closed circuit principle • Supports worldwide mains systems (adjustable) • Width 22.5 mm • 1 change-over contacts 5 A 	flare CONTROL P3-LTN	81.030.0021.1
Technical data		
Supply voltage 3 phase / 3 wire	380, 400, 415, 480 V AC	
Supply voltage 3 phase / 4 wire	220, 230, 240, 277 V AC	
Detection range for asymmetry	2 ... 22 %	
Detection time at asymmetry	0.1 ... 30 s	
Number of change-over contacts	1	
Maximum switching current	5 A	
Mechanical life time	10×10^6	
Electrical life time AC1	0.05×10^6	
Connection clamps	Screw clamp	
Wire range fine-stranded/solid	0.14 - 4 mm ² (AWG 26-12)	
Degree of protection / Mounting rail	IP 20 / TS 35 (EN60715)	
Dimensions (mm) W x H x D	22.5 x 100 x 100	
Operation temperature range	-20 ... +60 °C	
Approvals	CE, UL	







wietap Overvoltage protection

Important information on overvoltage

The necessity of overvoltage protection on machines and systems as well as for building technology is ever increasing. The potential danger of damage and even complete destruction posed to valuable electronic components or even complete production systems, computer systems or communication systems by sudden overvoltage from the grid, or direct lightning strikes has mobilized not just insurance companies. Well-advised users also know the importance of protecting their electrical devices, plants and systems both sufficiently and reliably against this danger, and the overall advantage of increasing their system availability.



Overvoltage protection modules

Overvoltage protection modules come in three type categories which designate their capacity to absorb overvoltage energy. Type 1 arresters can divert the largest amount of energy to ground (PE). The ideal installation location for these devices is at the building's main supply. In this configuration the impulse energy is considerably weakened, if it moves downstream into the installation. In sub-panels and control cabinets, this surplus energy is reduced further by type 2 and 3 arresters, thus maintaining the survival of the protected devices.



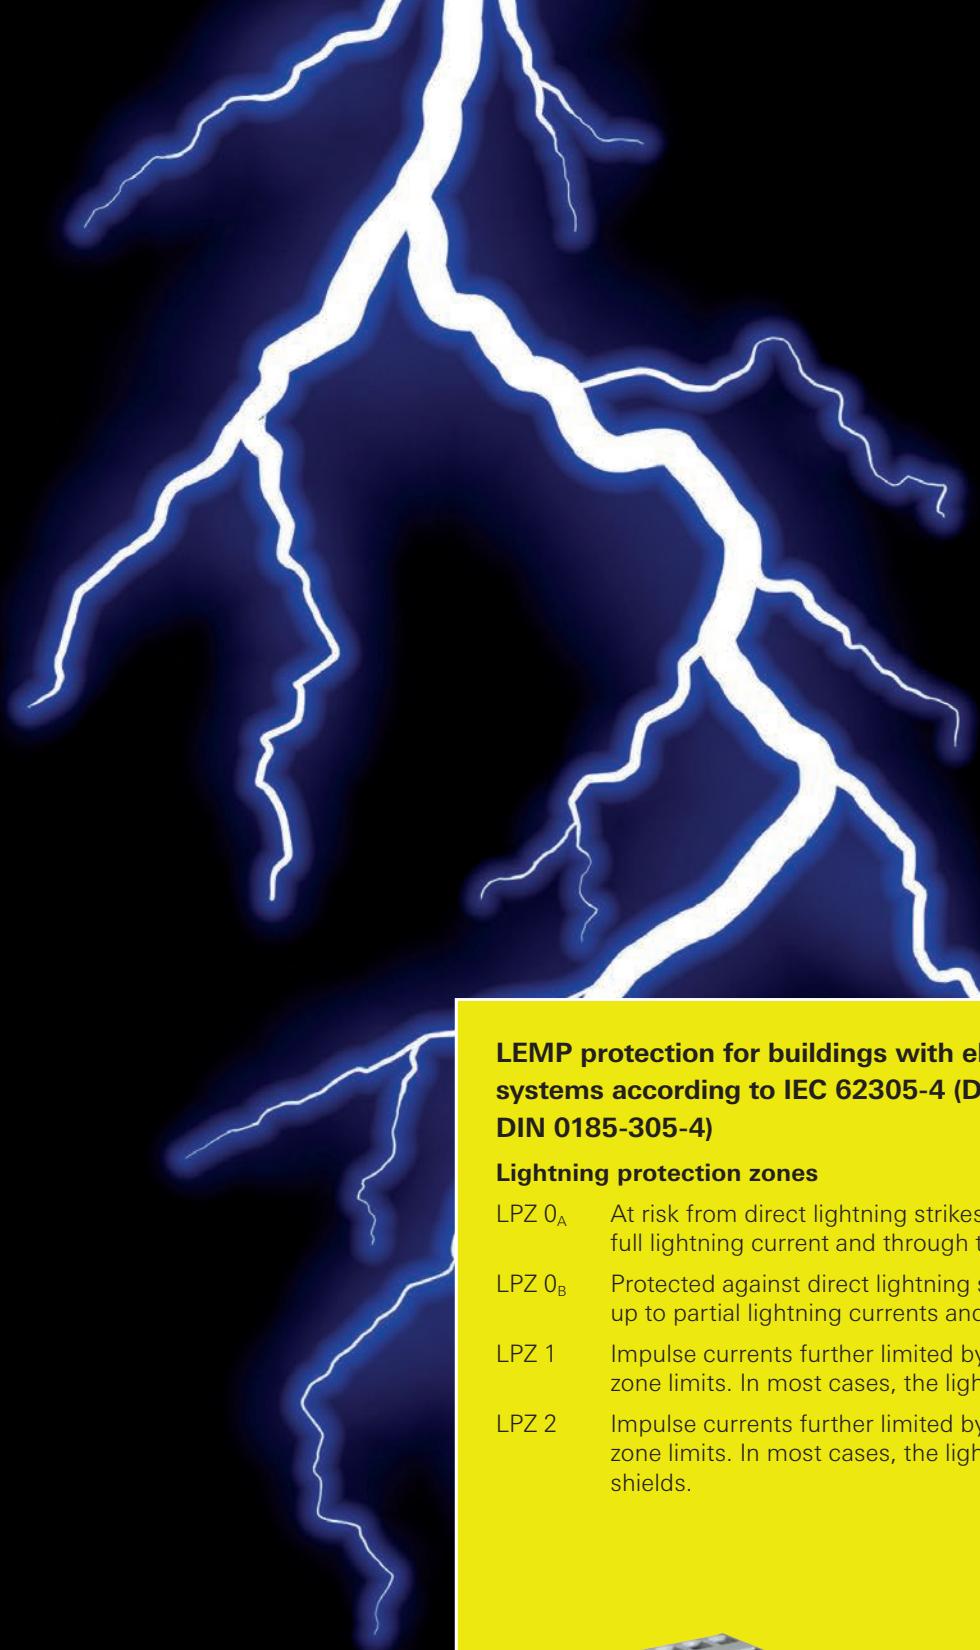


Table 1

LEMP protection for buildings with electrical and electronic systems according to IEC 62305-4 (DIN EN 62305-4, DIN 0185-305-4)

Lightning protection zones

- | | |
|--------------------|--|
| LPZ 0 _A | At risk from direct lightning strikes, impulse currents up to the full lightning current and through the full lightning field. |
| LPZ 0 _B | Protected against direct lightning strike. At risk from impulse currents up to partial lightning currents and through the full lightning field. |
| LPZ 1 | Impulse currents further limited by current division and SPDs at the zone limits. In most cases, the lightning field is attenuated by shields. |
| LPZ 2 | Impulse currents further limited by current division and SPDs at the zone limits. In most cases, the lightning field is attenuated by local shields. |



Playing it safe with **overvoltage protection**

Very short response time and high discharge capacity

With its considerably expanded **wietap** product range, Wieland Electric offers comprehensive solutions for overvoltage protection in control cabinets and sub panels of machines and buildings, as well as for photovoltaic systems. The components, which are modular and DIN rail mountable, range from the ready-to-connect 3-phase combi-arrester **wietap V M** for the main distribution, to the overvoltage protection module **wietap G M** for sub panels, up to the overvoltage module **wietap R M** intended for the control cabinet or constructed into the equipment.

All components are designed for application temperatures from -40 to 80 °C and have a high discharge capacity. Devices are also available with a remote signaling contact.

Properties of wietap:

- Electrically coordinated product family
- Highest discharge capacity up to 100 kA
- No tripping of fuses thanks to follow current limitation
- Latching pluggable protection modules
- Vibration and shock tested acc. to EN 60068-2
- Visual function & defect display for every path
- Modules replaceable without tools
- Can also be used in front of vertical power meter



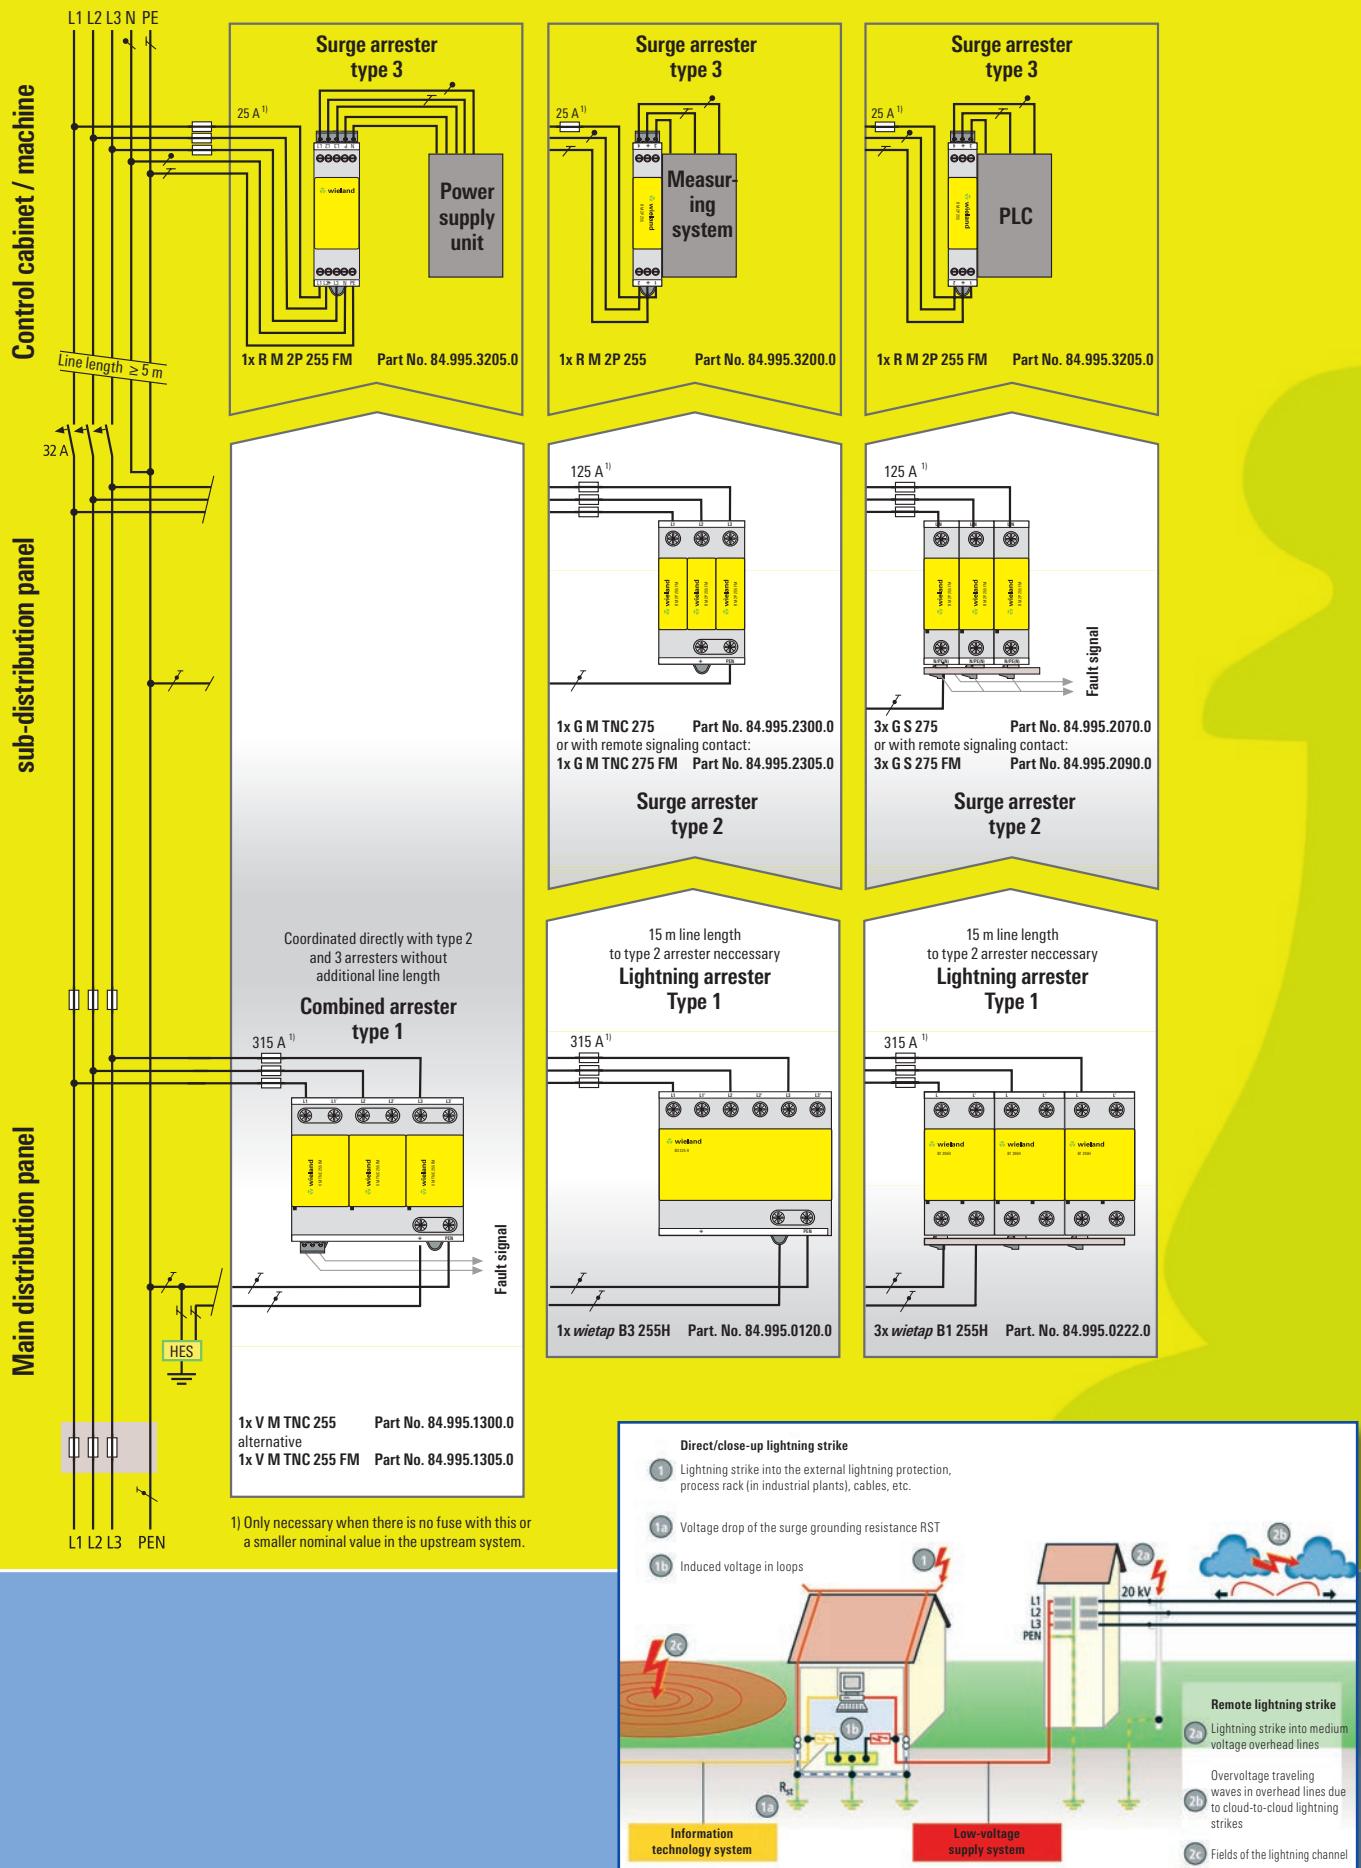


Figure 1

Overvoltage protection

The zone concept for lightning protection

The **zone concept for lightning protection** enables planners, builders and owners to plan, implement and monitor protective measures. All relevant devices, plants and systems can thus be protected reliably at economically justifiable costs.

Direct or close-up lightning strikes are lightning strikes into the lightning protection system of a building, in close proximity to it, or into the electrically conductive systems implemented in the building (e.g. low-voltage supply, telecommunications, control lines). (Fig. 1)

Remote lightning strikes are lightning strikes that occur far away from the object to be protected as well as lightning strikes into the medium voltage overhead system or in close proximity to it, or lightning discharge from cloud to cloud (Fig. 1: cases 2a, 2b and 2c).

In addition to a lightning protection system in the building, additional measures for an overvoltage protection of electrical and electronic systems are required in order to **safeguard the continuous availability** of complex power engineering and IT systems even in the case of a direct lightning strike. It is important to consider all the causes for over-voltages.

The zone concept for **lightning protection** as described in IEC 62305-4 (DIN EN 62305-4, DIN 0185-305-4) applies accordingly (Fig. 3). It divides a building into different risk zones. The relevant protective measures can then be derived for each zone, especially the devices and components for lightning and overvoltage protection.

The zones for lightning protection are defined as described in Table 1.

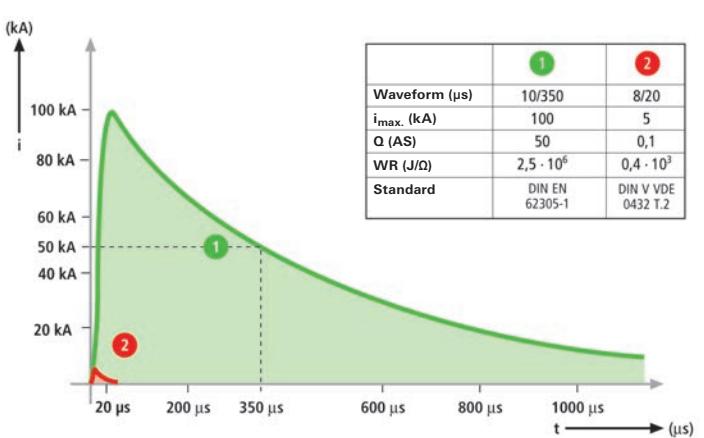


Figure 2: ① Peak current for testing of lightning arresters
② Peak current for testing of surge arrestors


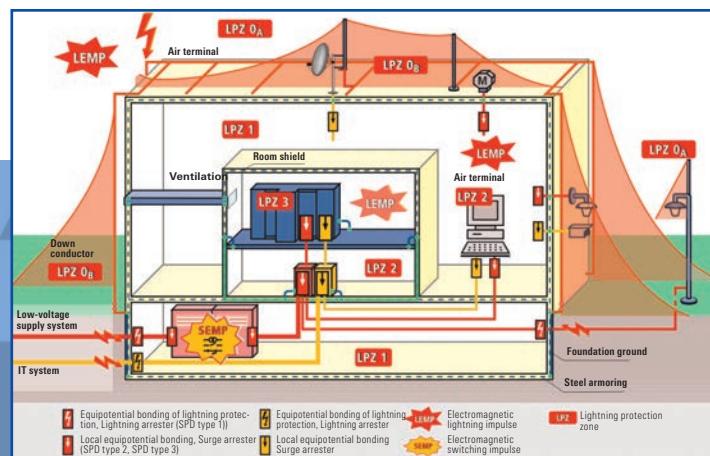


Figure 3: EMC-oriented zone concept for lightning protection

Three-phase combined arrester, type 1 (2, 3)


For protection of the building main supply

wietap V M TNC 255 (FM)		Type	Part No.
• Combined arrester, type 1	wietap V M TNC 255	84.995.1300.0	
• For TN-C-systems	wietap V M TNC 255 FM	84.995.1305.0	
• With pluggable protection modules	Replacement module L1, L2, L3 against $\frac{1}{2}$	84.995.1001.0	
• Max. system availability due to follow current limitation	Power network	TN-C	
• Switch-off selective for 20 A gL/gG fuses up to 50 kA _{eff} short-circuit current	SPD accord. to EN 61643-11 / IEC 61643-11	Type 1 + Typ 2 / Class I + Class II	
• Discharge capacity up to 75 kA (10/350)	Energy-coordinated protective function to the end device $\leq 5\text{m}$	Type 1 + Type 2 + Type 3	
• Function/failure indication according to VDE 0100-534	Nominal voltage AC [U _N]	230 / 400 V (50 / 60 Hz)	
• Optional with remote signaling contact (FM)	Maximum continuous voltage AC [U _c]	255 V (50 / 60 Hz)	
• Vibration and shock tested acc. to EN 60068-2	Lightn. impulse current (10/350) [L1+L2+L3-PEN] [I _{total}]	75 kA	
	Lightn. impulse current (10/350) [L-PEN] [I _{imp}]	25 kA	
	Nominal discharge current (8/20) [I _n]	25 / 75 kA	
	Protection level [U _r]	$\leq 1.5\text{kV}$	
	Follow current extinguishing capability AC [I _{ex}]	50 kA _{eff}	
	Limitation of follow current / selectivity	Non-tripping of a 20 A gL/gG fuse up to 50 kA _{eff} (prosp.)	
	Operating time [t _a]	$\leq 100\text{ ns}$	
	Max. pre-fusing (L) up to I _k = 50 kA _{eff}	315 A gG	
	Max. pre-fusing (L) up to I _k = 100 kA _{eff}	315 A gL/gG	
	Max. pre-fusing (L-L')	125 A gG	
	TOV-voltage [U _r] – characteristic	440 V / 120 min. – withstand	
	Temperature range (Parallel wiring) [T _{UP}]	-40 ... +80 °C	
	Temperature range (Through wiring) [T _{US}]	-40 ... +60 °C	
	Function/failure indication	green / red	
	Wire range (L1, L1', L2, L2', L3, L3', PEN, $\frac{1}{2}$) [min.]	10 mm ² (AWG 8) solid/fine-stranded	
	Wire range (L1, L2, L3, PEN) [max.]	50 mm ² (AWG 1) stranded/35 mm ² (AWG 2) fine-stranded	
	Wire range (L1', L2', L3', $\frac{1}{2}$) [max.]	35 mm ² (AWG 2) stranded/25 mm ² (AWG 4) fine-stranded	
	Mounted on DIN rail acc. to EN 60715	35 mm	
	Housing material	Thermoplast, UL 94 V-0	
	Degree of protection	IP 20	
	Dimensions	6 TE, DIN 43880 (108 mm)	
	Remote signaling contacts = Contact Type	Change-over contact	
	Switching capacity AC (FM)	250 V/0.5 A	
	Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
	Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded	
	Approvals	CE	



wietap V M TNS 255 (FM)


- Combined arrester Type 1
- For TN-S-systems
- With pluggable protection modules
- Max. system availability due to follow current limitation
- Switch-off selective for 20 A gL/gG fuses up to 50 kA_{eff} short-circuit current
- Discharge capacity up to 100 kA (10/350)
- Function/failure indication according to VDE 0100-534 (valid since March 2009)
- Optional with remote signaling contact (FM)
- Vibration and shock tested acc. to EN 60068-2

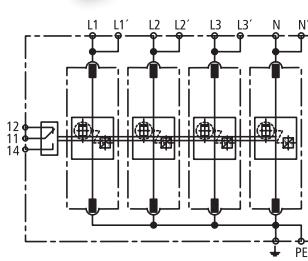

Type	Part No.
wietap V M TNS 255	84.995.1400.0
wietap V M TNS 255 FM	84.995.1405.0
Replacement module L1, L2, L3, N against $\frac{1}{2}$	84.995.1001.0
Power network	TN-S
SPD accord. to EN 61643-11 / IEC 61643-11	Type 1 + Typ 2 / Class I + Class II
Energy-coordinated protective function to the end device $\leq 5\text{m}$	Type 1 + Type 2 + Type 3
Nominal voltage AC [U _N]	230 / 400 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	264 V (50 / 60 Hz)
Lightn. impulse current (10/350) [L1+L2+L3-PEN] [I _{total}]	100 kA
Lightn. impulse current (10/350) [L, N-PE] [I _{imp}]	25 kA
Nominal discharge current (8/20) [I _n]	25 / 100 kA
Protection level [U _r]	$\leq 1.5\text{kV}$
Follow current extinguishing capability AC [I _{ex}]	50 kA _{eff} / 50 kA _{eff}
Limitation of follow current / selectivity	Non-tripping of a 20 A gL/gG fuse up to 50 kA _{eff} (prosp.)
Operating time [t _a]	$\leq 100\text{ ns}$
Max. pre-fusing (L) up to I _k = 50 kA _{eff}	315 A gG
Max. pre-fusing (L) up to I _k = 100 kA _{eff}	315 A gL/gG
Max. pre-fusing (L-L')	125 A gG
TOV-voltage [L-N] [U _r] – characteristic	440 V / 120 min. – withstand
Temperature range (Parallel wiring) [T _{UP}]	-40 ... +80 °C
Temperature range (Through wiring) [T _{US}]	-40 ... +60 °C
Function/failure indication	green / red
Wire range (L1, L1', L2, L2', L3, L3', N, N', PE, $\frac{1}{2}$) [min.]	10 mm ² (AWG 8) solid/fine-stranded
Wire range (L1, L2, L3, PE, N) [max.]	50 mm ² (AWG 1) stranded/35 mm ² (AWG 2) fine-stranded
Wire range (L1', L2', L3', N', $\frac{1}{2}$) [max.]	35 mm ² (AWG 2) stranded/25 mm ² (AWG 4) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	8 TE, DIN 43880 (144 mm)
Remote signaling contacts = Contact Type	Change-over contact
Switching capacity AC (FM)	250 V/0.5 A
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded
Approvals	CE

Three-phase combined arrester, type 1 (2, 3)

For protection of the building main supply

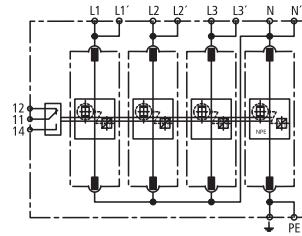Type	Part No.
wietap V M TT 255 (FM)	
• Combined arrester Type 1	84.995.1310.0
• For TT- and TN-S-systems ("3+1" circuits)	84.995.1315.0
• With pluggable protection modules	84.995.1001.0
• Max. system availability due to follow current limitation	84.995.1100.0
• Switch-off selective for 20 A gL/gG fuses up to 50 kA _{eff} short-circuit current	
• Discharge capacity up to 100 kA (10/350)	
• Function/failure indication according to VDE 0100-534	
• Optional with remote signaling contact (FM)	
• Vibration and shock tested acc. to EN 60068-2	
	
	
Power network	TT and TN-S
SPD according to EN 61643-11 / IEC 61643-11	Type 1 + Type 2 / Class I + Class II
Energy-coordinated protective function to the end device \leq 5m	Type 1 + Type 2 + Type 3
Nominal voltage AC [U _n]	230 / 400 V (50 / 60 Hz)
Maximum continuous voltage AC [L-N] [U _c]	264 V (50 / 60 Hz)
Maximum continuous voltage AC [N-PE] [U _{c(N-PE)}]	255 V (50 / 60 Hz)
Lightn. impulse current (10/350) [L1+L2+L3+N-PE] [I _{total}]	100 kA
Lightn. impulse current (10/350) [L-N] [I _{imp}]	25 kA
Lightn. impulse current (10/350) [N-PE] [I _{imp}]	100 kA
Nominal discharge current (8/20) [I _n]	25 / 100 kA
Protection level [L-N, N-PE] [U _p]	\leq 1.5 kV
Follow current extinguishing capability [L-N]/[N-PE] AC [I _f]	50 kA _{eff} / 100 A _{eff}
Limitation of follow current / selectivity	Non-tripping of a 20 A gL/gG fuse up to 50 kA _{eff} (prosp.)
Operating time [t _A]	\leq 100 ns
Max. pre-fusing (L) up to I _K = 50 kA _{eff}	315 A gG
Max. pre-fusing (L) up to I _K = 100 kA _{eff}	315 A gL/gG
Max. pre-fusing (L-L')	125 A gL/gG
TOV-voltage [L-N] [U _T] – characteristic	440 V / 120 min. – withstand
TOV-voltage [N-PE] [U _T] – characteristic	1200 V / 200 ms – withstand
Temperature range (Parallel wiring) [T _{up}]	-40 ... +80 °C
Temperature range (Through wiring) [T _{us}]	-40 ... +60 °C
Function/failure indication	green / red
Wire range (L1, L1', L2, L2', L3, L3', N, N', PE, \neq) [min.]	10 mm ² (AWG 8) solid/fine-stranded
Wire range (L1, L2, L3, N, PE) [max.]	50 mm ² (AWG 1) stranded/35 mm ² (AWG 2) fine-stranded
Wire range (L1', L2', L3', N, \neq) [max.]	35 mm ² (AWG 2) stranded/25 mm ² (AWG 4) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	8 TE, DIN 43880 (144 mm)
Remote signaling contacts = Contact Type	Change-over contact
Switching capacity AC (FM)	250 V/0.5 A
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded
Approvals	CE  

Replacement module for **wietap VM** devices

Type	Part No.
wietap V MOD 255	
Network spark gap protection module for all L – \neq ; L – N and for wietap V M TNS 255 (FM) N – \neq	84.995.1001.0
	
wietap V MOD NPE 100	
Network spark gap protection module for wietap V M TT 255 (FM) N – \neq	84.995.1100.0
	



3-phase lightning arrester, type 1

For protection of the building main supply

Type	Part No.
wietap B3 255H	84.995.0120.0
Technical Data	
SPD accord. to EN 61643-11 / IEC 61643-11	Type 1 / Class I
Nominal voltage AC [U _N]	230 / 400 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	255 V (50 / 60 Hz)
Lightn. impulse current (10/350) [L-N/PEN] [I _{imp}]	50 kA
Lightn. impulse current (10/350) [L1+L2+L3-N/PEN] [I _{total}]	100 kA
Protection level [U _P]	≤ 4 kV
Follow current extinguishing capability AC [I _{fif}]	50 kA _{eff}
Limitation of follow current / selectivity	Non-tripping of a 35 A gL/gG fuse up to 50 kA _{eff} (prosp.)
Operating time [t _a]	≤ 100 ns
Max. pre-fusing bis IK = 50 kA _{eff} (ta ≤ 0,2 s)	500 A gG
Max. pre-fusing bis IK = 50 kA _{eff} (ta ≤ 5 s)	315 A gG
Max. pre-fusing bei IK > 50 kA _{eff}	200 A gG
Max. pre-fusing (L-L')	125 A gG
TOV-voltage [U _T] – characteristic	440 V / 120 min. – withstand
Temperature range (Parallel wiring) [T _{UP}]	-40 ... +80 °C
Temperature range (Through wiring) [T _{Us}]	-40 ... +60 °C
Wire range (L1, L1', L2, L2', L3, L3', N/PEN, N'/PEN)	10 mm ² (AWG 8) solid/fine-stranded
Wire range (L1, L2, L3, N/PEN)	50 mm ² (AWG 1) stranded / 35 mm ² (AWG 2) fine-stranded
Wire range (L1', L2', L3', N'/PEN)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	6 TE, DIN 43880 (108 mm)
Approvals	CE

1-phase lightning arrester, type 1


For the protection of the building main supply

Type	Part No.
wietap B1 255H	84.995.0222.0
Technical Data	
SPD accord. to EN 61643-11 / IEC 61643-11	Type 1 / Class I
Nominal voltage ac [U _N]	230 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	255 V (50 / 60 Hz)
Lightn. impulse current (10/350) [I _{imp}]	50 kA
Protection level [U _P]	≤ 4 kV
Follow current extinguishing capability AC [I _{fif}]	50 kA _{eff}
Limitation of follow current / selectivity	Non-tripping of a 35 A gL/gG fuse up to 50 kA _{eff} (prosp.)
Operating time [t _a]	≤ 100 ns
Max. pre-fusing bis IK = 50 kA _{eff} (ta ≤ 0,2 s)	500 A gG
Max. pre-fusing bis IK = 50 kA _{eff} (ta ≤ 5 s)	315 A gG
Max. pre-fusing bei IK > 50 kA _{eff}	200 A gG
Max. pre-fusing (L-L')	125 A gG
TOV-voltage [U _T] – characteristic	440 V / 120 min. – withstand
Temperature range (Parallel wiring) [T _{UP}]	-40 ... +80 °C
Temperature range (Through wiring) [T _{Us}]	-40 ... +60 °C
Wire range (L, L', N/PEN, N'/PEN) [min.]	10 mm ² (AWG 8) solid/fine-stranded
Wire range (L, N/PEN) [max.]	50 mm ² (AWG 1) stranded / 35 mm ² (AWG 2) fine-stranded
Wire range (L', N'/PEN) [max.]	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	2 TE, DIN 43880 (36 mm)
Approvals	CE

N-PE lightning arrester, type 1

For protection of the building main supply

Type	Part No.
wietap GPM 255	84.995.0055.0
Technical Data	
SPD accord. to EN 61643-11 / IEC 61643-11	Type 1 / Class I
Maximum continuous voltage AC [Uc]	255 V
Lightn. impulse current (10/350) [I_{imp}]	100 kA
Protection level [U_p]	$\leq 1.5 \text{ kV}$
Follow current extinguishing capability AC [I_{ext}]	100 Aeff
Operating time [t_o]	$\leq 100 \text{ ns}$
TOV-voltage – characteristic	1200 V / 200 ms – withstand
Temperature range (Parallel wiring) [T_{UP}]	-40 ... +80 °C
Temperature range (Through wiring) [T_{Us}]	-40 ... +60 °C
Function/failure indication	green / red
Wire range (min.)	10 mm² (AWG 8) solid/fine-stranded
Wire range (max.)	50 mm² (AWG 1) stranded / 35 mm² (AWG 2) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	2 TE, DIN 43880 (36 mm)
Approvals	CE

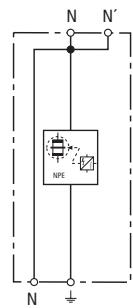


Three-phase combined arrester, type 2

For protection of sub-distributions or the control cabinet main supply

wietap G M TNC 275 (FM)


- Surge arrester, type 2
- For TN-C-systems
- With pluggable protection modules
- Function/failure indication according to VDE 0100-534
- Optional with remote signaling contact (FM)
- Vibration and shock tested acc. to EN 60068-2



Type	Part No.
wietap G M TNC 275	84.995.2300.0
wietap G M TNC 275 FM	84.995.2305.0
Replacement module L1, L2, L3 against \pm	84.995.2010.0
Power network	TN-C
SPD accord. to EN 61643-11 / IEC 61643-11	Type 2 / Class II
Nominal voltage AC [U _N]	230 / 400 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	275 V (50 / 60 Hz)
Nominal discharge current (8/20) [I _n]	20 kA
Max. discharge current (8/20) [I _{max}]	40 kA
Protection level [U _e]	≤ 1.5 kV
Protection level at 5 kA [U _P]	≤ 1 kV
Operating time [t _a]	≤ 25 ns
Maximum network overcurrent protection	125 A gG
Short-circuit proof with max. network overcurrent protection	50 kA _{eff}
TOV-voltage [U _i] – characteristic	335 V / 5 sec. – withstand
TOV-voltage [U _i] – characteristic	440 V / 120 min. – safe failure
Temperature range [T _u]	-40 ... +80 °C
Function/failure indication	green / red
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	3 TE, DIN 43880 (54 mm)
Remote signaling contacts = Contact Type	Change-over contact
Switching capacity AC (FM)	250 V/0.5 A
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded
Approvals	CE

wietap G M TNS 275 (FM)

- Surge arrester, type 2
- For TN-S-systems
- With pluggable protection modules
- Function/failure indication according to VDE 0100-534
- Optional with remote signaling contact (FM)
- Vibration and shock tested acc. to EN 60068-2

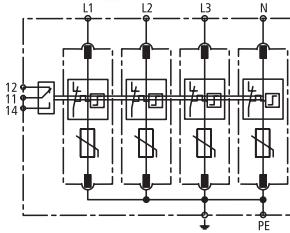

Type	Part No.
wietap G M TNS 275	84.995.2400.0
wietap G M TNS 275 FM	84.995.2405.0
Replacement module L1, L2, L3, N against \pm	84.995.2010.0
Power network	TN-S
SPD accord. to EN 61643-11 / IEC 61643-11	Type 2 / Class II
Nominal voltage AC [U _N]	230 / 400 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	275 V (50 / 60 Hz)
Nominal discharge current (8/20) [I _n]	20 kA
Max. discharge current (8/20) [I _{max}]	40 kA
Protection level [U _e]	≤ 1.5 kV
Protection level at 5 kA [U _P]	≤ 1 kV
Operating time [t _a]	≤ 25 ns
Maximum network overcurrent protection	125 A gG
Short-circuit proof with max. network overcurrent protection	50 kA _{eff}
TOV-voltage [U _i] – characteristic	335 V / 5 sec. – withstand
TOV-voltage [U _i] – characteristic	440 V / 120 min. – safe failure
Temperature range [T _u]	-40 ... +80 °C
Function/failure indication	green / red
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	Thermoplast, UL 94 V-0
Degree of protection	IP 20
Dimensions	4 TE, DIN 43880 (72 mm)
Remote signaling contacts = Contact Type	Change-over contact
Switching capacity AC (FM)	250 V/0.5 A
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded
Approvals	CE

Three-phase combined arrester, type 2

For protection of sub-distributions or the control cabinet main supply

wietap G M TT 275 (FM)		Type	Part No.
wietap G M TT 275		84.995.2310.0	
wietap G M TT 275 FM		84.995.2315.0	
Replacement module L1, L2, L3 against N		84.995.2010.0	
Replacement module N against $\frac{1}{2}$		84.995.2050.0	
Power network	TT and TN-S (Variante „3+1“)		
SPD accord. to EN 61643-11 / IEC 61643-11	Type 2 / Class II		
Nominal voltage AC [U _n]	230 / 400 V (50 / 60 Hz)		
Maximum continuous voltage AC [L-N] [U _c]	275 V (50 / 60 Hz)		
Maximum continuous voltage AC [N-PE] [U _c]	255 V (50 / 60 Hz)		
Nominal discharge current (8/20) [I _n]	20 kA		
Max. discharge current (8/20) [I _{max}]	40 kA		
Lightn. impulse current (10/350) [N-PE] [I _{imp}]	12 kA		
Protection level [L-N] [U _p]	≤ 1.5 kV		
Protection level [L-N] at 5 kA [U _p]	≤ 1 kV		
Protection level [N-PE] [U _p]	≤ 1.5 kV		
Follow current extinguishing capability [N-PE] [I _f]	100 A _{eff}		
Operating time [L-N] [t _a]	≤ 25 ns		
Operating time [N-PE] [t _a]	≤ 100 ns		
Maximum network overcurrent protection	125 A gG		
Short-circuit proof with network overcurrent protection with 25 A gL/gG	50 kA _{eff}		
TOV-voltage [L-N] [U _t] – characteristic	335 V / 5 sec. – withstand		
TOV-voltage [L-N] [U _t] – characteristic	440 V / 120 min. – safe failure		
TOV-voltage [N-PE] [U _t] – characteristic	1200 V / 200 ms – withstand		
Temperature range [T _u]	-40 ... +80 °C		
Function/failure indication	green / red		
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded		
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded		
Mounted on DIN rail acc. to EN 60715	35 mm		
Housing material	Thermoplast, UL 94 V-0		
Degree of protection	IP 20		
Dimensions	4 TE, DIN 43880 (72 mm)		
Remote signaling contacts = Contact Type	Change-over contact		
Switching capacity AC (FM)	250 V/0.5 A		
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A		
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded		
Approvals			

Replacement module for **wietap G M** devices

wietap G MOD 275		Type	Part No.
Varistor protection module for all L – $\frac{1}{2}$; L – N and for wietap G M TNS 275 (FM) N – $\frac{1}{2}$		wietap G MOD 275	84.995.2010.0
wietap G MOD NPE		wietap G MOD NPE	84.995.2050.0
Spark gap protection module for N – $\frac{1}{2}$ and for wietap G M TT 275 (FM) N – $\frac{1}{2}$			



Single-phase surge arrester, type 2

For protection of sub-distributions or the control cabinet main supply


wietap G S 275 (FM)	Type	Part No.
• Surge arrester, type 2	wietap G S 275	84.995.2070.0
• All-purpose surge arrester	wietap G S 275 FM	84.995.2090.0
• With pluggable protection modules	Power network	universal
• High discharge capacity due to powerful zinc oxid varistor	SPD accord. to EN 61643-11 / IEC 61643-11	Type 2 / Class II
• High reliability due to arrester monitoring	Nominal voltage AC [U _N]	230 V (50 / 60 Hz)
• Slim design (modular construction) acc. to DIN 43880	Maximum continuous voltage AC [U _c]	275 V (50 / 60 Hz)
• Multi-function connection for conductors and comb rails	Maximum continuous voltage DC [U _c]	350 V
• Function/failure indication according to VDE 0100-534	Nominal discharge current (8/20) [I _n]	20 kA
• Optional with remote signaling contact (FM)	Max. discharge current (8/20) [I _{max}]	40 kA
• Vibration and shock tested acc. to EN 60068-2	Protection level [U _p]	≤ 1.5 kV
	Protection level at 5 kA [U _p]	≤ 1 kV
	Operating time [t _a]	≤ 25 ns
	Maximum network overcurrent protection	125 A gg
	Short-circuit proof with max. network overcurrent protection	50 kA _{eff}
	TOV-voltage [U _t] – characteristic	335 V / 5 sec. – withstand
	TOV-voltage [U _t] – characteristic	440 V / 120 min. – safe failure
	Temperature range [T _u]	-40 ... +80 °C
	Function/failure indication	green / red
	Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded
	Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded
	Mounted on DIN rail acc. to EN 60715	35 mm
	Housing material	Thermoplast, UL 94 V-0
	Degree of protection	IP 20
	Dimensions	1 TE, DIN 43880 (18 mm)
	Remote signaling contacts = Contact Type	Change-over contact
	Switching capacity AC (FM)	250 V/0.5 A
	Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
	Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded
	Approvals	CE

wietap G MOD 275	Type	Part No.
• Replacement module for wietap G S 275 (FM)	wietap G MOD 275	84.995.2010.0

Single-phase surge arrester, type 2

For protection of sub-distributions or the control cabinet main supply

wietap GP C S (FM)		Type	Part No.
wietap GP C S		84.995.2030.0	
wietap GP C S FM		84.995.2035.0	
Power network	TT		
SPD accord. to EN 61643-11 / IEC 61643-11	Type 2 / Class II		
Maximum continuous voltage AC [U _c]	255 V (50 / 60 Hz)		
Nominal discharge current (8/20) [I _n]	20 kA		
Max. discharge current (8/20) [I _{max}]	40 kA		
Follow current extinguishing capability [I _{ff}]	100 A _{eff}		
Lightn. impulse current (10/350) [I _{imp}]	12 kA		
Protection level [U _p]	≤ 1.5 kV		
Operating time [t _A]	≤ 100 ns		
TOV-voltage [U _T] – characteristic	1200 V / 200 ms – withstand		
Temperature range [T _U]	-40 ... +80 °C		
Function/failure indication	green / red		
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded		
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded		
Mounted on DIN rail acc. to EN 60715	35 mm		
Housing material	Thermoplast, UL 94 V-0		
Degree of protection	IP 20		
Dimensions	1 TE, DIN 43880 (18 mm)		
Remote signaling contacts = Contact Type	Change-over contact		
Switching capacity AC(FM)	250 V/0.5 A		
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A		
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded		
Approvals	CE  		




wietap GP C MOD		Type	Part No.
• Replacement module for wietap G CS (FM)		wietap GP C MOD	84.995.2060.0



Surge arrester, type 3

For direct load protection in control cabinets or sub-distributions


Type	Part No.	Part No.
wietap R M 2P 30 FM		84.995.3206.0
wietap R M 2P 255 (FM)		
SPD accord. to EN 61643-11 / IEC 61643-11	Type 3 / Class III	Type 3 / Class III
Nominal voltage AC [U _n]	230 V (50/60 Hz)	24 V (50/60 Hz)
Maximum continuous voltage AC [U _c]	255 V (50/60 Hz)	30 V (50/60 Hz)
Maximum continuous voltage DC [U _c]	255 V	30 V
Nominal load current AC [I _n]	25 A	25 A
Nominal discharge current (8/20) [I _n]	3 kA	1 kA
Total discharge current (8/20) [L+N-PE] [I _{total}]	5 kA	2 kA
Combined surge [U _{oc}]	6 kV	2 kV
Combined surge [L+N-PE] [U _{OC total}]	10 kV	4 kV
Protection level [L-N] [U _p]	≤ 1250 V	≤ 180 V
Protection level [L/N-PE] [U _p]	≤ 1500 V	≤ 630 V
Operating time [L-N] [t _A]	≤ 25 ns	≤ 25 ns
Operating time [L/N-PE] [t _A]	≤ 100 ns	≤ 100 ns
Maximum network overcurrent protection	25 A gL/gG oder B 25 A	25 A gL/gG oder B 25 A
Short-circuit proof with network overcurrent protection with 25 A gL/gG	6 kA _{rms}	6 kA _{rms}
TOV-voltage		
[L-N] [U _t] – characteristic	335 V/5 sec. – withstand	--
[L-N] [U _t] – characteristic	440 V/120 min. – safe failure	
[L/N-PE] (II) [U _t] – characteristic	335 V/120 min. – withstand	--
[L/N-PE] (II) [U _t] – characteristic	440 V/5 sec. – withstand	
[L+N-PE] (II) [U _t] – characteristic	1200 V + U _{REF} /200 ms – safe failure	--
Temperature range [T _u]	-40 ... +80 °C	
Function/failure indication	green / red	
Wire range min.	0.5 mm ² (AWG 20) solid/fine-stranded	
Wire range max.	4 mm ² (AWG 12) solid / 2.5 mm ² (AWG 14) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	Thermoplast, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 TE, DIN 43880 (18 mm)	
Remote signaling contacts = Contact Type	Change-over contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for Remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded	
Approvals	  	

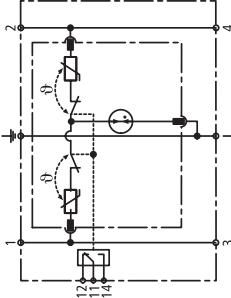

Surge arrester, type 3

For direct load protection in control cabinets or sub-distributions

wietap R M 4P 255 (FM)		Type	Part No.
wietap R M 4P 255		84.995.3400.0	
wietap R M 4P 255 FM		84.995.3405.0	
Technical Data			
SPD accord. to EN 61643-11 / IEC 61643-11	Type 3 / Class III		
Nominal voltage AC [Un]	230 / 400 V (50/60 Hz)		
Maximum continuous voltage AC [Uc]	255 / 440 V (50/60 Hz)		
Nominal load current AC [In]	25 A		
Nominal discharge current (8/20) [In]	3 kA		
Total discharge current (8/20) [L+N-PE] [Itotal]	8 kA		
Combined surge [Uoc]	6 kV		
Combined surge [L+N-PE] [UOC total]	16 kV		
Protection level [L-N] (Up)	≤ 1000 V		
Protection level [L/N-PE] (Up)	≤ 1500 V		
Operating time [L-N] (ta)	≤ 25 ns		
Operating time [L/N-PE] (ta)	≤ 100 ns		
Maximum network overcurrent protection	25 A gL/gG oder B 25 A		
Short-circuit proof with network overcurrent protection with 25 A gL/gG	6 kAeff		
TOV-voltage [L-N] (Ur) – characteristic	335 V / 5 sec. – withstand		
TOV-voltage [L-N] (Ur) – characteristic	440 V / 120 min. – safe failure		
TOV-voltage [L/N-PE] (I) (Ur) – characteristic	335 V / 120 min. – withstand		
TOV-voltage [L/N-PE] (I) (Ur) – characteristic	440 V / 5 sec. – withstand		
TOV-voltage [N-PE] (II) (Ur) – characteristic	1200 V / 200 ms – safe failure		
Temperature range [Tu]	-40 ... +80 °C		
Function/failure indication	green / red		
Wire range (min.)	0.5 mm² (AWG 20) solid/fine-stranded		
Wire range (max.)	4 mm² (AWG 12) solid / 2.5 mm² (AWG 14) fine-stranded		
Mounted on DIN rail acc. to EN 60715	35 mm		
Housingwerkstoff	Thermoplast, UL 94 V-0		
Degree of protection	IP 20		
Dimensions	2 TE, DIN 43880 (36 mm)		
Remote signaling contacts = Contact Type	Change-over contact		
Switching capacity AC (FM)	250 V/0.5 A		
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A		
Wire range for remote signaling terminals	max. 1.5 mm² (AWG 16) solid/fine-stranded		
Approvals	CE  		

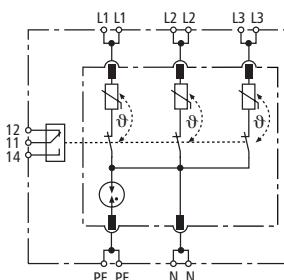

wietap R M MOD 4P 255		Type	Part No.
• Replacement module for wietap R M 4P 255		wietap R M MOD 4P 255	84.995.3020.0



**Solutions for Category B for the different mains systems:
Selection Matrix**

Circuit	Circuit Voltage Configuration	Used Types	Connected between
	120/240V Split Phase 1Ø 3W + Grnd	wietap G S 150 FM UL wietap G S 150 FM UL	L1 Phase-Grnd L2 Phase-Grnd
	240/480V Split Phase 1Ø 3W + Grnd	wietap G S 320 FM UL wietap G S 320 FM UL	L1 Phase-Grnd L2 Phase-Grnd
	127/254V Split Phase 1Ø 3W + Grnd	wietap G S 150 FM UL wietap G S 150 FM UL	L1 Phase-Grnd L2 Phase-Grnd
	120/208V Wye 3Ø 3W + Grnd	wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 150 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd
	277/480V Wye 3Ø 3W + Grnd	wietap G S 320 FM UL wietap G S 320 FM UL wietap G S 320 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd
	347/600V Wye 3Ø 3W + Grnd	wietap G S 440 FM UL wietap G S 440 FM UL wietap G S 440 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd
	120/208V Wye 3Ø 4W + Grnd	wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 150 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd Neutral-Grnd
	277/480V Wye 3Ø 4W + Grnd	wietap G S 320 FM UL wietap G S 320 FM UL wietap G S 320 FM UL wietap G S 320 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd Neutral-Grnd
	347/600V Wye 3Ø 4W + Grnd	wietap G S 440 FM UL wietap G S 440 FM UL wietap G S 440 FM UL wietap G S 440 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd Neutral-Grnd
	127/220V Wye 3Ø 4W + Grnd	wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 150 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd Neutral-Grnd
	120/240V High Leg Delta - B High	wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 150 FM UL wietap G S 275 FM UL	L1 Phase-Neutral L3 Phase-Neutral Neutral-Grnd L2 Phase-Neutral
	240/480V High Leg Delta - B High	wietap G S 320 FM UL wietap G S 320 FM UL wietap G S 320 FM UL wietap G S 600 FM UL	L1 Phase-Neutral L3 Phase-Neutral Neutral-Grnd L2 Phase-Neutral
	480V Delta 3Ø 3W + Grnd & HRG Wye	wietap G S 600 FM UL wietap G S 600 FM UL wietap G S 600 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd
	240V Delta 3Ø 3W + Grnd	wietap G S 320 FM UL wietap G S 320 FM UL wietap G S 320 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd
	600V Delta 3Ø 3W + Grnd & HRG	wietap G S WE 600 FM UL wietap G S WE 600 FM UL wietap G S WE 600 FM UL	L1 Phase-Grnd L2 Phase-Grnd L3 Phase-Grnd
	120V Single Phase	wietap G S 150 FM UL	L1 Phase-Neutral
	240V Single Phase	wietap G S 320 FM UL	L1 Phase-Neutral
	127V Single Phase	wietap G S 150 FM UL	L1 Phase-Neutral
	254V Single Phase	wietap G S 320 FM UL	L1 Phase-Neutral
	347V Single Phase	wietap G S 440 FM UL	L1 Phase-Neutral
	277V Single Phase	wietap G S 320 FM UL	L1 Phase-Neutral
	480V Single Phase	wietap G S 600 FM UL	L1 Phase-Neutral
	600V Single Phase	wietap G S WE 600 FM UL	L1 Phase-Neutral
	480V B Corner Grnd Delta 3Ø 3W + Grnd	wietap G S 600 FM UL wietap G S 600 FM UL	L1 Phase-Grnd L3 Phase-Grnd
	240V B Corner Grnd Delta 3Ø 3W + Grnd	wietap G S 320 FM UL wietap G S 320 FM UL	L1 Phase-Grnd L3 Phase-Grnd
	600V B Corner Grnd Delta 3Ø 3W + Grnd	wietap G S WE 600 FM UL wietap G S WE 600 FM UL	L1 Phase-Grnd L3 Phase-Grnd

Overvoltage Protection for North and Central America

For the North and Central American region OVP modules have to be used with UL or CSA approval. At the same time the voltage levels are different compared to Europe or the Asian region.

For this reason Wieland offers specialized OVP modules. The green marked countries have energy network systems according UL and CSA mains systems and voltage levels.


The overvoltage protection according IEEE is defined into 3 different areas:

- **Category C (Class I according IEC):** is mainly used at the feed in point of a building or production site. Mainly at outside termination
- **Category B (Class II according IEC):** this category is often used inside of buildings in main distribution panels or in switch board cabinets of machines
- **Category A (Class III according IEC):** is mainly used for the protection of single devices inside a switch board cabinet

Wieland is offering solutions for inside the building. This means for Category B and Category A.

At Category A applications the arrester is connected up front in series to the device.

The rated voltage of the OVP is selected according the nominal voltage of the device which is connected.

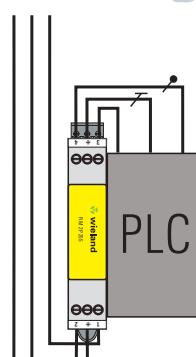

Category A



Single-phase surge arrester, category B & A

For protection of sub-distributions or the control cabinet main supply


Type	Part No.	Part No.
wietap G S 150 FM UL	84.995.2092.1	
wietap G S 275 FM UL		84.995.2090.1
SPD accord. to EN 61643-11/IEC 61643-11	Type 2 / Cat. B / Class II	Type 2 / Cat. B / Class II
Rated voltage AC [U _n]	120 V (50 / 60 Hz)	230 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	150 V (50 / 60 Hz)	275 V (50 / 60 Hz)
Maximum continuous voltage DC [U _c]	200 V	350 V
Rated discharge current [I _n]	15 kA	20 kA
Max. discharge current (8/20) [I _{max}]	40 kA	40 kA
Protection level [U _p]	≤ 0.7 kV	≤ 1.25 kV
Protection level at 5 kA [U _p]	≤ 0.55 kV	≤ 1 kV
Operating time [t _a]	≤ 25 ns	≤ 25 ns
Maximum network overcurrent protection	125 A gG	125 A gG
Short-circuit proof with max. network overcurrent protection	50 kA _{rms}	50 kA _{rms}
TOV-voltage [U _t] – characteristic	175 V / 5 sec. – withstand	335 V / 5 sec. – withstand
TOV-voltage [U _t] – characteristic	230 V / 120 min. – safe failure	440 V / 120 min. – safe failure
Temperature range [T _u] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C	
Function/failure indication	green / red	
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded	
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	thermoplastic, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 mod., DIN 43880	
Remote signaling contacts (FM)	changeover contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded	
Approvals	CE, cULus, GS	

Type	Part No.	Part No.
wietap G S 320 FM UL	84.995.2093.1	
wietap G S 385 FM UL		84.995.2094.1
SPD accord. to EN 61643-11/IEC 61643-11	Type 2 / Cat. B / Class II	Type 2 / Cat. B / Class II
Rated voltage AC [U _n]	230 V (50 / 60 Hz)	230 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	320 V (50 / 60 Hz)	385 V (50 / 60 Hz)
Maximum continuous voltage DC [U _c]	420 V	500 V
Rated discharge current [I _n]	20 kA	20 kA
Max. discharge current (8/20) [I _{max}]	40 kA	40 kA
Protection level [U _p]	≤ 1.5 kV	≤ 1.75 kV
Protection level at 5 kA [U _p]	≤ 1.2 kV	≤ 1.35 kV
Operating time [t _a]	≤ 25 ns	≤ 25 ns
Maximum network overcurrent protection	125 A gG	125 A gG
Short-circuit proof with max. network overcurrent protection	25 kA _{rms}	25 kA _{rms}
TOV-voltage [U _t] – characteristic	335 V / 5 sec. – withstand	385 V / 5 sec. – withstand
TOV-voltage [U _t] – characteristic	440 V / 120 min. – safe failure	440 V / 120 min. – safe failure
Temperature range [T _u] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C	
Function/failure indication	green / red	
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded	
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	thermoplastic, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 mod., DIN 43880	
Remote signaling contacts (FM)	changeover contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded	
Approvals	CE, cULus, GS	


Single-phase surge arrester, category B & A

For protection of sub-distributions or the control cabinet main supply

Type	Part No.	Part No.
wietap G S 440 FM UL	84.995.2095.1	
wietap G S 600 FM UL		84.995.2096.1
SPD accord. to EN 61643-11/IEC 61643-11	Type 2 / Cat. B / Class II	Type 2 / Cat. B / Class II
Rated voltage AC [U _r]	400 V (50 / 60 Hz)	480 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	440 V (50 / 60 Hz)	600 V (50 / 60 Hz)
Maximum continuous voltage DC [U _c]	585 V	600 V
Rated discharge current [I _{rn}]	20 kA	15 kA
Max. discharge current (8/20) [I _{max}]	40 kA	30 kA
Protection level [U _p]	≤ 2 kV	≤ 2.5 kV
Protection level at 5 kA [U _p]	≤ 1.7 kV	≤ 2 kV
Operating time [t _o]	≤ 25 ns	≤ 25 ns
Maximum network overcurrent protection	125 A gG	100 A gG
Short-circuit proof with max. network overcurrent protection	25 kA _{rms}	25 kA _{rms}
TOV-voltage [U _t] – characteristic	580 V / 5 sec. – withstand	700 V / 5 sec. – withstand
TOV-voltage [U _t] – characteristic	765 V / 120 min. – safe failure	915 V / 120 min. – safe failure
Temperature range [T _u] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C	
Function/failure indication	green / red	
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded	
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	thermoplastic, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 mod., DIN 43880	
Remote signaling contacts (FM)	changeover contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded	
Approvals	CE, UL, GS	

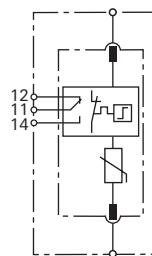


Type	Part No.	Part No.
wietap G S WE 600 FM UL	84.995.2097.1	
SPD accord. to EN 61643-11/IEC 61643-11	Type 2 / Category B / Class II	
Rated voltage AC [U _r]	480 V (50 / 60 Hz)	
Maximum continuous voltage AC [U _c]	600 V (50 / 60 Hz)	
Rated varistor voltage AC [U _{mov}]	750V	
Rated discharge current [I _{rn}]	15 kA	
Max. discharge current (8/20) [I _{max}]	25 kA	
Protection level [U _p]	≤ 3 kV	
Protection level at 5 kA [U _p]	≤ 2.5 kV	
Operating time [t _o]	≤ 25 ns	
Maximum network overcurrent protection	100 A gL/gG	
Short-circuit proof with max. network overcurrent protection	25 kA _{rms}	
TOV-voltage [U _t] – characteristic	900 V / 5 sec. – withstand	
TOV-voltage [U _t] – characteristic	915 V / 120 min. – safe failure	
Temperature range [T _u] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C	
Function/failure indication	green / red	
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded	
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	thermoplastic, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 mod., DIN 43880	
Remote signaling contacts (FM)	changeover contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded	
Approvals	CE, UL, GS	

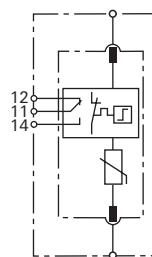


Surge arrester, category A

For direct load protection in control cabinets or sub-distributions

Type	Part No.
wietap R M 2P 30 FM	84.995.3206.0
Technical Data	
SPD accord. to EN 61643-11 / IEC 61643-11	Type 3 /Category A / Class III
Rated voltage AC [U _n]	24 V (50 / 60 Hz)
Maximum continuous voltage AC [U _c]	30 V (50 / 60 Hz)
Maximum continuous voltage DC [U _c]	30 V
Rated current AC [I _L]	25 A
Rated discharge current (8/20) [I _n]	1 kA
Total discharge current (8/20) [L+N-PE] [I _{total}]	2 kA
Combined surge [U _{oc}]	2 kV
Combined surge [L+N-PE] [U _{oc total}]	4 kV
Protection level [L-N] [U _p]	≤ 180 V
Protection level [L/N-PE] [U _p]	≤ 630 V
Operating time [L-N] [t _A]	≤ 25 ns
Operating time [L/N-PE] [t _A]	≤ 100 ns
Maximum network overcurrent protection	25 A gL/gG or B 25 A
Short-circuit proof with network overcurrent protection with 25 A gL/gG	6 kA _{rms}
Temperature range [T _U] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C
Function/failure indication	green / red
Wire range (min.)	0.5 mm ² (AWG 20) solid/fine-stranded
Wire range (max.)	4 mm ² (AWG 12) solid / 2.5 mm ² (AWG 14) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	thermoplastic, UL 94 V-0
Degree of protection	IP 20
Dimensions	1 mod., DIN 43880
Remote signaling contacts (FM)	changeover contact
Switching capacity AC (FM)	250 V/0.5 A
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded
Approvals	CE, UL, CSA

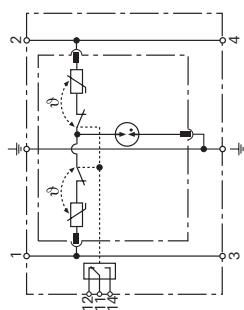


Type	Part No.
wietap R M 2P 150 FM	84.995.3209.0
Technical Data	
SPD accord. to EN 61643-11 / IEC 61643-11	Type 3 / Category A / Class III
Rated voltage AC [U _n]	120 V (50/60 Hz)
Maximum continuous voltage AC [U _c]	150 V (50/60 Hz)
Maximum continuous voltage DC [U _c]	150 V
Rated current AC [I _L]	25 A
Rated discharge current (8/20) [I _n]	2 kA
Total discharge current (8/20) [L+N-PE] [I _{total}]	4 kA
Combined surge [U _{oc}]	4 kV
Combined surge [L+N-PE] [U _{oc total}]	8 kV
Protection level [L-N] [U _p]	≤ 640 V
Protection level [L/N-PE] [U _p]	≤ 800 V
Operating time [L-N] [t _A]	≤ 25 ns
Operating time [L/N-PE] [t _A]	≤ 100 ns
Maximum network overcurrent protection	25 A gL/gG or B 25 A
Short-circuit proof with network overcurrent protection with 25 A gL/gG	6 kA _{rms}
Temperature range [T _U] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C
Function/failure indication	green / red
Wire range (min.)	0.5 mm ² (AWG 20) solid/fine-stranded
Wire range (max.)	4 mm ² (AWG 12) solid / 2.5 mm ² (AWG 14) fine-stranded
Mounted on DIN rail acc. to EN 60715	35 mm
Housing material	thermoplastic, UL 94 V-0
Degree of protection	IP 20
Dimensions	1 mod., DIN 43880
Remote signaling contacts (FM)	changeover contact
Switching capacity AC (FM)	250 V/0.5 A
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded
Approvals	CE, UL, CSA

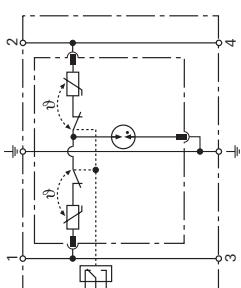


Surge arrester, category A


For direct load protection in control cabinets or sub-distributions

wietap R M 2P 255	Type	Part No.
wietap R M 2P 255	84.995.3200.0	
Technical Data		
SPD accord. to EN 61643-11 / IEC 61643-11		
Rated voltage AC [U _N]	230 V (50 / 60 Hz)	
Maximum continuous voltage AC [U _c]	255 V (50 / 60 Hz)	
Maximum continuous voltage DC [U _c]	255 V	
Rated current AC [I _r]	20 A	
Rated discharge current (8/20) [I _n]	3 kA	
Total discharge current (8/20) [L+N-PE] [I _{total}]	5 kA	
Combined surge [U _{oc}]	6 kV	
Combined surge [L+N-PE] [U _{OC total}]	10 kV	
Protection level [L-N] [U _p]	≤ 1250 V	
Protection level [L/N-PE] [U _p]	≤ 1500 V	
Operating time [L-N] [t _A]	≤ 25 ns	
Operating time [L/N-PE] [t _A]	≤ 100 ns	
Maximum network overcurrent protection	25 A gL/gG or B 25 A	
Short-circuit proof with network overcurrent protection with 25 A gL/gG	6 kA _{rms}	
TOV-voltage [L-N] [U _T] – characteristic	335 V / 5 sec. – withstand	
TOV-voltage [L-N] [U _T] – characteristic	440 V / 120 min. – safe failure	
TOV-voltage [L/N-PE] (I) [U _T] – characteristic	335 V / 120 min. – withstand	
TOV-voltage [L/N-PE] (I) [U _T] – characteristic	440 V / 5 sec. – withstand	
TOV-voltage [L+N-PE] (II) [U _T] – characteristic	1200 V + U _{REF} / 200 ms – safe failure	
Temperature range [T _U] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C	
Function/failure indication	green / red	
Wire range (min.)	0.5 mm ² (AWG 20) solid/fine-stranded	
Wire range (max.)	4 mm ² (AWG 12) solid / 2.5 mm ² (AWG 14) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	thermoplastic, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 mod., DIN 43880	
Approvals	CE  	

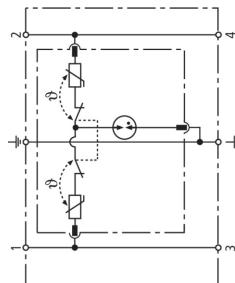

wietap R M 2P 255 FM	Type	Part No.
wietap R M 2P 255 FM	84.995.3205.0	
Technical Data		
SPD accord. to EN 61643-11 / IEC 61643-11		
Rated voltage AC [U _N]	230 V (50 / 60 Hz)	
Maximum continuous voltage AC [U _c]	255 V (50 / 60 Hz)	
Maximum continuous voltage DC [U _c]	255 V	
Rated current AC [I _r]	25 A	
Rated discharge current (8/20) [I _n]	3 kA	
Total discharge current (8/20) [L+N-PE] [I _{total}]	5 kA	
Combined surge [U _{oc}]	6 kV	
Combined surge [L+N-PE] [U _{OC total}]	10 kV	
Protection level [L-N] [U _p]	≤ 1250 V	
Protection level [L/N-PE] [U _p]	≤ 1500 V	
Operating time [L-N] [t _A]	≤ 25 ns	
Operating time [L/N-PE] [t _A]	≤ 100 ns	
Maximum network overcurrent protection	25 A gL/gG or B 25 A	
Short-circuit proof with network overcurrent protection with 25 A gL/gG	6 kA _{rms}	
TOV-voltage [L-N] [U _T] – characteristic	335 V / 5 sec. – withstand	
TOV-voltage [L-N] [U _T] – characteristic	440 V / 120 min. – safe failure	
TOV-voltage [L/N-PE] (I) [U _T] – characteristic	335 V / 120 min. – withstand	
TOV-voltage [L/N-PE] (I) [U _T] – characteristic	440 V / 5 sec. – withstand	
TOV-voltage [L+N-PE] (II) [U _T] – characteristic	1200 V + U _{REF} / 200 ms – safe failure	
Temperature range [T _U] acc. to UL 1449 3rd edition acc. to EN 61643-11	0... +85 °C -40... +85 °C	
Function/failure indication	green / red	
Wire range (min.)	0.5 mm ² (AWG 20) solid/fine-stranded	
Wire range (max.)	4 mm ² (AWG 12) solid / 2.5 mm ² (AWG 14) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	thermoplastic, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	1 mod., DIN 43880	
Remote signaling contacts (FM)	changeover contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 16) solid/fine-stranded	
Approvals	CE  	

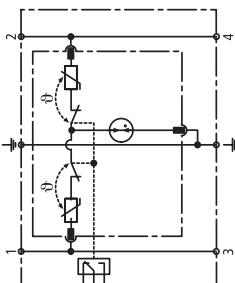

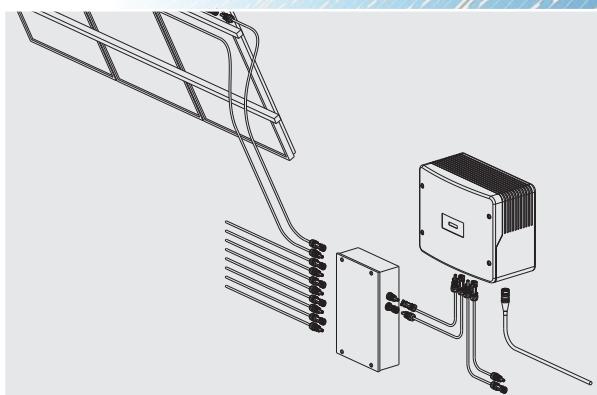

contact us
we are
green.

Overvoltage protection for Photovoltaic systems

Photovoltaic systems, abbreviated as PV systems, are a considerable investment that must be protected from failure and damage. As these systems are installed outdoors, they are exposed to the danger of overvoltage from lightning strikes.

Overvoltage protection in the DC circuit with central inverters

The generator circuit (the PV modules) produces a direct current. Connecting the PV modules and arrays in series allows voltages of 1000 V to be reached. This combination with the fact that the generator circuit can continue to supply energy after overvoltage requires sophisticated technology for the overvoltage arrester.

DC overvoltage protection:

The PV/DC overvoltage arresters are specially designed for use in PV systems.

Both the housing technology and the connections are designed for the requirements of a PV systems high voltages and conductor cross-sections. With a width of only 36 or 48 mm, the units are easily installed inside distribution panels, requiring the minimum of space.

- High discharge capacity due to powerful zinc-oxide varistor
- No fire hazard caused by permanent electric arc due to combined disconnect and short-circuit facility. Overload indicated in display window
- Signaling contacts for remote monitoring in all remote signaling types

AC overvoltage protection:

On the AC side of the inverters overvoltage protection must also be installed. The arresters listed here are the most commonly used versions.


Suitable units can be found inside the chapters **wietap IEC** and **wietap UL/CSA**.



Surge protection for solar modules

To be used in photovoltaic DC circuits

wietap GS PV SCI 600 (FM)	Type	Part No.
• DC solar arrester for 600 V string voltage	wietap GS PV SCI 600	84.995.2550.0
• For DC grounded solar systems	wietap GS PV SCI 600 FM	84.995.2555.0
Technical Data		
• No fire hazard during overload due to combined disconnection and short-circuit device	Connection between DC – Grnd	DC – Grnd
• Safe, arc-free replacement of protection modules due to integrated DC fuse	SPD accord. to EN 50539-11	Type 2
• High discharge capacity	Maximum PV voltage [U_{CPV}]	≤ 600 V
• Function/failure indication	Short-circuit resistance (I_{SCPV})	1 kA
• wietap GS PV SCI 600 FM with remote signaling contact (FM)	Nominal discharge current (8/20) [(DC+/DC-) → PE] [I_n]	12.5 kA
	Max. discharge current (8/20) [(DC+/DC-) → PE] [I_{max}]	25 kA
	Protection level [U_P]	≤ 2.5 kV
	Protection level at 5 kA [U_P]	≤ 2 kV
	Operating time [t_a]	≤ 25 ns
	Temperature range [T_u]	-40 ... +80 °C
	Function/failure indication	green / red
	Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded
	Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded
	Mounted on DIN rail acc. to EN 60715	35 mm
	Housing material	Thermoplast, UL 94 V-0
	Degree of protection	IP 20
	Dimensions	2 TE, DIN 43880 (36 mm)
	Remote signaling contacts (FM)	Change-over contact
	Switching capacity AC (FM)	250 V/0.5 A
	Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
	Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded
	Approvals	CE ePULUS



Surge protection for solar modules

To be used in photovoltaic DC circuits

wietap GM YPV SCI 600 (FM)											
<ul style="list-style-type: none"> • DC solar arrester for 600 V string voltage • No fire hazard during overload due to combined disconnection and short-circuit device • Safe, arc-free replacement of protection modules due to integrated DC fuse • High discharge capacity • Function/failure indication • wietap GM YPV SCI 600 FM with remote signaling contact (FM) 	<table border="1"> <thead> <tr> <th>Type</th><th>Part No.</th></tr> </thead> <tbody> <tr> <td>wietap GM YPV SCI 600</td><td>84.995.2511.0</td></tr> <tr> <td>wietap GM YPV SCI 600 FM</td><td>84.995.2516.0</td></tr> <tr> <td>Repl. module "+" or "-" against int. neutral point</td><td>84.995.2053.0</td></tr> <tr> <td>Repl. module int. neutral point against \pm</td><td>84.995.2010.0</td></tr> </tbody> </table>	Type	Part No.	wietap GM YPV SCI 600	84.995.2511.0	wietap GM YPV SCI 600 FM	84.995.2516.0	Repl. module "+" or "-" against int. neutral point	84.995.2053.0	Repl. module int. neutral point against \pm	84.995.2010.0
Type	Part No.										
wietap GM YPV SCI 600	84.995.2511.0										
wietap GM YPV SCI 600 FM	84.995.2516.0										
Repl. module "+" or "-" against int. neutral point	84.995.2053.0										
Repl. module int. neutral point against \pm	84.995.2010.0										
Technical Data											
Connection between	DC+ – Grnd – DC-										
SPD accord. to EN 50539-11	Type 2										
Maximum PV voltage [U_{CPV}]	≤ 600 V										
Short-circuit resistance (I_{SCPV})	1 kA										
Total discharge current (8/20) [I_{total}]	40 kA										
Nominal discharge current (8/20) [(DC+/DC-) \rightarrow PE] [I_n]	12.5 kA										
Max. discharge current (8/20) [(DC+/DC-) \rightarrow PE] [I_{max}]	25 kA										
Protection level [U_P]	≤ 2.5 kV										
Protection level at 5 kA [U_p]	≤ 2 kV										
Operating time [t_A]	≤ 25 ns										
Temperature range [Tu]	-40 ... +80 °C										
Function/failure indication	green / red										
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded										
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded										
Mounted on DIN rail acc. to EN 60715	35 mm										
Housing material	Thermoplast, UL 94 V-0										
Degree of protection	IP 20										
Dimensions	3 TE, DIN 43880 (54 mm)										
Remote signaling contacts (FM)	Change-over contact										
Switching capacity AC (FM)	250 V/0.5 A										
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A										
Wire range for remote signaling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded										
Approvals											

| | |

Replacement module for **wietap GM YPV SCI 600 (FM)**


wietap G MOD PV SCI 300	
"+" or "-" against internal neutral point	
wietap G MOD PV 300	
Internal neutral point against PE	



Surge protection for solar modules

To be used in photovoltaic DC circuits

wietap GM YPV SCI 1000 (FM)	Type	Part No.
wietap GM YPV SCI 1000	84.995.2510.0	
wietap GM YPV SCI 1000 FM	84.995.2515.0	
Repl. module "+" or "-" against int. neutral point	84.995.2051.0	
Repl. module int. neutral point against $\frac{1}{2}$	84.995.2015.0	
Technical Data		
Connection between	DC+ – Grnd – DC-	
SPD accord. to EN 50539-11	Type 2	
Maximum PV voltage [U _{CPV}]	≤ 1000 V	
Short-circuit resistance (I_{SCPV})	1 kA	
Total discharge current (8/20) [I_{total}]	40 kA	
Nominal discharge current (8/20) [(DC+/DC-) \rightarrow PE] [I_n]	12.5 kA	
Max. discharge current (8/20) [(DC+/DC-) \rightarrow PE] [I_{max}]	25 kA	
Protection level [U _P]	≤ 4 kV	
Protection level at 5 kA [U _P]	≤ 3.5 kV	
Operating time [t _a]	≤ 25 ns	
Temperature range [T _U]	-40 ... +80 °C	
Function/failure indication	green / red	
Wire range (min.)	1.5 mm ² (AWG 14) solid/fine-stranded	
Wire range (max.)	35 mm ² (AWG 2) stranded / 25 mm ² (AWG 4) fine-stranded	
Mounted on DIN rail acc. to EN 60715	35 mm	
Housing material	Thermoplast, UL 94 V-0	
Degree of protection	IP 20	
Dimensions	3 TE, DIN 43880 (54 mm)	
Remote signalling contacts (FM)	Change-over contact	
Switching capacity AC (FM)	250 V/0.5 A	
Switching capacity DC (FM)	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A	
Wire range for remote signalling terminals	max. 1.5 mm ² (AWG 14) solid/fine-stranded	
Approvals	CE  GS	

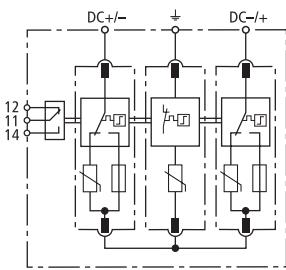Replacement module for **wietap GM YPV SCI 1000 (FM)**

wietap G MOD PV SCI 500	Type	Part No.
"+" or "-" against internal neutral point	wietap G MOD PV SCI 500	84.995.2051.0
wietap G MOD PV 500		
Internal neutral point against PE	wietap G MOD PV 500	84.995.2041.0

Surge protection for solar modules

To be used in photovoltaic DC circuits

AC arrester on mains for Class 1/2/3



The used arrester type of the AC side is depending on the mains system.

A suitable arrester with the relevant certifications can be found in the previous chapters.

The suitable distribution for your project



AC combiner box



DC combiner box

Housing

Protection	Class II
UV-resistant	yes
Material	polycarbonate
Cable connection	pluggable or gland

Build in components


- Termination points for solar connectors
- Big termination points for inverter connection
- PE connection
- String fusing
- Reverse current diodes
- String monitoring
- Main switch
- Circuit breaker
- Overvoltage protection and many more

Wieland will support you during the planning phase. High product quality and documentation are a standard for us.

More information and a planning tool can be found in the brochure **gesis® SOLAR**, Part No. 0710.1.




Selection of our catalogs

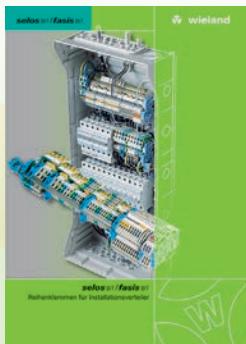


0510.0 selos BIT / fasis BIT
DIN Rail Terminal Blocks
for Junction Boxes




0670.1 gesis®
Pluggable electrical installation
for indoors

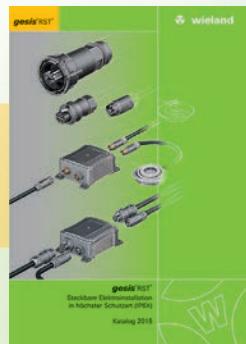


0690.1 gesis®RST®
Pluggable electrical installation
in highest protection (IP6X)

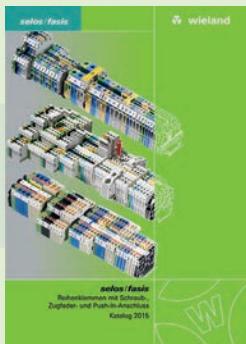

0500.1 selos / fasis
DIN Rail Terminal Blocks

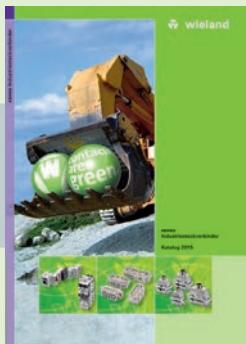


0530.1 revos
Industrial Multipole
Connectors

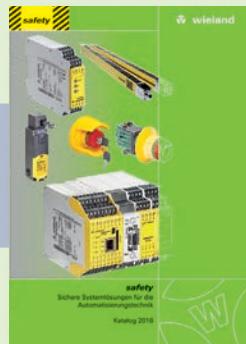


0860.1 safety
System Solutions for
Automation Technology




0415.1 Machine building
Individual customer
solutions

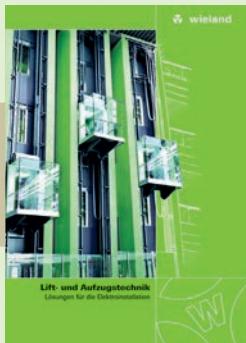


0416.1 Lift Technology
Solutions for the electrical
installation

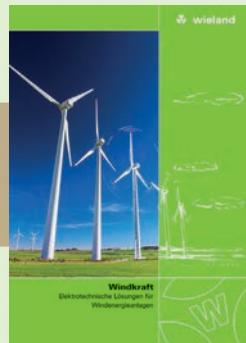


0430.1 Wind power
Electro-technical solutions
for wind energy systems

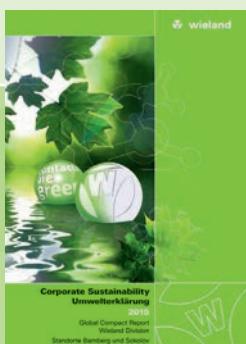


0910.1 Corporate Sustainability
Environmental Statement

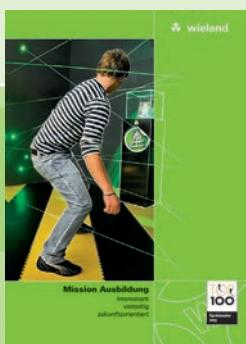


0912.0 Mission Ausbildung
interessant, vielseitig,
zukunftsorientiert

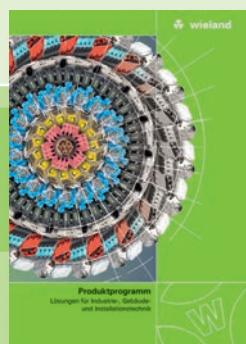

0901.1 Product Range
Solutions or industrial, building
and installation technology

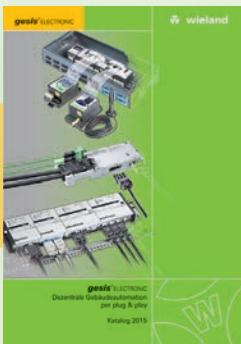

0700.1 gesis® ELECTRONIC
Decentralized building automation with plug & play

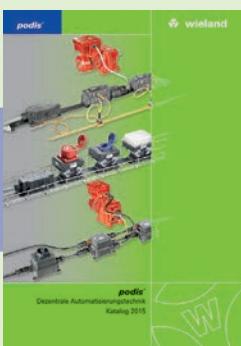

0830.1 podis®
Decentralized Automation

Building and installation technology



0417.1 Shop fitting
Pluggable electrical installation




0407.1 Light
Solutions for the electrical connection of luminaires

Industry and automation technology



0950.1 Wieland Image brochure

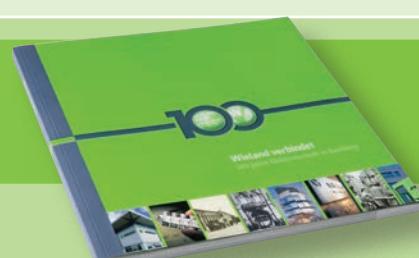

0004.2 Wieland connects
100 years in Bamberg.

Industries

Wieland

Technical consultation and general information

Hotline – one call is all it takes

Industrial Automation – Electromechanical

Hotline **+49 951 9324-991**

E-Mail **AT.TS@wieland-electric.com**

Building and Installation Technology

Hotline **+49 951 9324-996**

E-Mail **BIT.TS@wieland-electric.com**

Industrial Automation – Electronics

Hotline **+49 951 9324-995**

E-Mail **AT.TS@wieland-electric.com**

Safety

Hotline **+49 951 9324-999**

E-Mail **safety@wieland-electric.com**



General information and news:
www.wieland-electric.com

Visit our e-catalog at
<http://eshop.wieland-electric.com>



Our subsidiaries

... and the addresses of our sales partner worldwide are available at:

www.wieland-electric.com



USA

Wieland Electric Inc.
North American Headquarters
 2889 Brighton Road
 Oakville, Ontario L6H 6C9
 Phone +1 905 8298414
 Fax +1 905 8298413
www.wielandinc.com



CANADA

Wieland Electric Inc.
North American Headquarters
 2889 Brighton Road
 Oakville, Ontario L6H 6C9
 Phone +1 905 8298414
 Fax +1 905 8298413
www.wieland-electric.ca



GREAT BRITAIN

Wieland Electric Ltd.
 Riverside Business Center,
 Walnut Tree Close
 GB-Guildford/Surrey GU1 4UG
 Phone +44 1483 531213
 Fax +44 1483 505029
sales.uk@wieland-electric.com
www.wieland.co.uk



FRANCE

Wieland Electric SARL.
 Le Cérame, Hall 6
 47, avenue des Genottes
 CS 48313
 95803 Cergy-Pontoise Cedex
 Phone +33 1 30320707
 Fax +33 1 30320714
info.france@wieland-electric.com
www.wieland-electric.fr



SPAIN

Wieland Electric S.L.
 C/ Maria Auxiliadora 2, bajos
 E-08017 Barcelona
 Phone +34 93 2523820
 Fax +34 93 2523825
ventas@wieland-electric.com
www.wieland-electric.es



ITALY

Wieland Electric S.r.l.
 Via Edison, 209
 I-20019 Settimo Milanese
 Phone +39 02 48916357
 Fax +39 02 48920685
info.italy@wieland-electric.com
www.wieland-electric.it



BELGIUM & GD LUXEMBOURG

ATEM-Wieland Electric NV
 Bedrijvenpark De Veert 4
 B-2830 Willebroek
 Phone +32 3 8661800
 Fax +32 3 8661828
info.belgium@wieland-electric.com
www.wieland-electric.be

DENMARK

Wieland Electric A/S
 Vallørækken 26
 DK-4600 Køge
 Phone +45 70 266635
 Fax +45 70 266637
sales.denmark@wieland-electric.com
www.wieland-electric.dk



SWITZERLAND

Wieland Electric AG
 Harzachstrasse 2b
 CH-8404 Winterthur
 Phone +41 52 2352100
 Fax +41 52 2352119
info.swiss@wieland-electric.com
www.wieland-electric.ch



POLAND

Wieland Electric Sp. Zo.o.
 Św. Antoniego 8
 62-080 Swadzim
 Phone +48 61 2225400
 Fax +48 61 8407166
office@wieland-electric.pl
www.wieland-electric.pl



CHINA

Wieland Electric Trading
 Unit 2703 International Soho City
 889 Renmin Road,
 Huang Pu District
 PRC- Shanghai 200010
 Phone +86 21 63555833
 Fax +86 21 63550090
info-shanghai@wieland-electric.com
www.wieland-electric.cn



JAPAN

Wieland Electric Co, Ltd.
 Nisso No. 16 Bldg. 7F
 3-8-8 Shin-Yokohama,
 Kohoku-ku
 Yokohama 222-0033
 Phone +81 45 473 5085
 Fax +81 45 470 5408
info.japan@wieland-electric.com



GERMANY

Headquarters
Wieland Electric GmbH
 Brennerstraße 10 – 14
 96052 Bamberg, Germany
 Phone +49 951 9324-0
 Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.de

Headquarters:
Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg, Germany

Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.com

Industrial technology

Solutions for the control cabinet

- DIN rail terminal blocks
 - Screw, tension spring or push-in connection technology
 - Wire cross sections up to 300 mm²
 - Numerous special functions
 - Software solutions interfacing to CAE systems
- Safety
 - Safe signal acquisition
 - Safety switching devices
 - Modular safety modules
 - Compact safety controllers
 - Application consulting and training
- Network engineering and fieldbus systems
 - Remote maintenance via VPN industrial router and VPN service portal
 - Industrial Ethernet switches
 - PLC and I/O systems, standard and increased environmental conditions
- Interface
 - Power supply units
 - Overvoltage protection
 - Coupling relays, semiconductor switches
 - Timer relays, measuring and monitoring relays
 - Analog coupling and converter modules
 - Passive interfaces

Solutions for field applications

- Decentralized installation and automation technology
 - Electrical installation for wind tower
 - Fieldbus interfaces and motor starters
- Connectors for industrial applications
 - Rectangular and round connectors
 - Aluminium or plastic housings
 - Degree of protection up to IP69K
 - Current-carrying capacity up to 100A
 - Connectors for hazardous areas
 - Modular, application-specific technology

PC board terminals and connectors

- Screw or spring clamp connection technology
- Spacings: 3.5 mm to 10.16 mm
- Reflow or wave soldering process

Building and installation technology

- Building installation systems
 - Main power supply connectors IP20/IP65...IP69K
 - Bus connectors
 - Low-voltage connectors
 - Power distribution system with flat cables
 - Distribution systems
 - Room automation with KNX and wireless technology
 - DIN rail terminal blocks for electrical installations
 - Overvoltage protection

**contacts
are
green.**