

# Accessories

## Connectors and cables

### Connection cable M23, 12-pin, straight, shielded (OptoPulse)



#### Features

- Connection cable shielded with female connector M23, open cable end
- Cable (4x2x0.14 mm<sup>2</sup>)
- 12 pin version
- Cable coating PVC
- Colour code according to DIN 47100
- UL/CSA certification
- Temperature -40...+85 °C (fixed installation)

#### Part number


10164705	Connector M23, 12-pin
11095302	Connection cable 1 m shielded with female connector M23, 12-pin
11100408	Connection cable 2 m shielded with female connector M23, 12-pin
11100430	Connection cable 5 m shielded with female connector M23, 12-pin
11100431	Connection cable 10 m shielded with female connector M23, 12-pin

#### Suitable for


EIL580 - blind hollow shaft, EIL580 - clamping flange, EIL580 - synchro flange, EIL580 - through hollow shaft, EIL580P - blind hollow shaft, EIL580P - clamping flange, EIL580P - synchro flange, EIL580P - through hollow shaft

#### Terminal assignment

Connector M23	Core colour
Pin 1	pink
Pin 2	-
Pin 3	blue
Pin 4	red
Pin 5	green
Pin 6	yellow
Pin 7	-
Pin 8	grey
Pin 9	-
Pin 10	white
Pin 11	-
Pin 12	brown
Housing	Shield



#### Dimensions

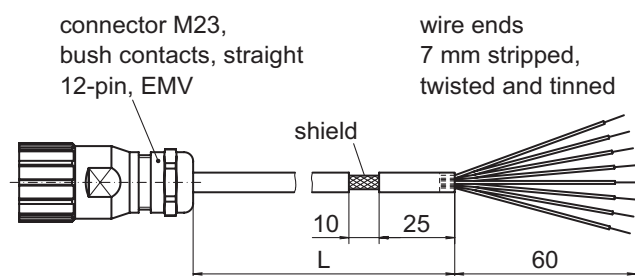

Z01533