

# Absolute encoders - bus interfaces

Solid shaft  $\varnothing 10$  mm with clamping flange

Magnetic multiturn encoders 13 bit ST / 16 bit MT, Profibus-DP

## BMMV 58 Profibus-DP - MAGRES hermetic



BMMV 58K Profibus-DP with clamping flange

### Features

- Encoder multiturn / Profibus-DP
- Magnetic sensing, hermetically sealed
- Resolution: singleturn 13 bit, multiturn 16 bit
- Integrated fieldbus interface
- High resistance to shock and vibrations
- Resolution and zero point programmable
- Clamping flange
- Protection IP 69K
- Material: stainless steel 1.4305

### Technical data - electrical ratings

Voltage supply	10...30 VDC
Consumption typ.	100 mA (24 VDC, w/o load)
Initializing time typ.	170 ms after power on
Interface	Profibus-DPV0
Function	Multiturn
Device adress	Rotary switch in housing
Steps per turn	$\leq 8192$ / 13 bit
Number of turns	$\leq 65536$ / 16 bit
Absolute accuracy	$\pm 1^\circ$
Sensing method	Magnetic
Code	Binary
Code sequence	CW default, programmable
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Programmable parameters	Operating modes Total resolution Preset Scaling
Diagnostic functions	Position or parameter error Multiturn sensing
Status indicator	DUO-LED integrated in housing
Approval	UL approval / E217823

### Technical data - mechanical design

Size (flange)	$\varnothing 58$ mm
Shaft type	$\varnothing 10$ mm solid shaft (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 68, IP 69K
Operating speed	$\leq 6000$ rpm
Operating torque typ.	0.031 Nm
Admitted shaft load	$\leq 120$ N axial (combined) $\leq 280$ N radial (combined) $\leq 270$ N axial (concentrated load)
Materials	Stainless steel 1.4305 (other materials on request)
Operating temperature	$-40 \dots +85^\circ\text{C}$
Relative humidity	95 %
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 500 g, 6 ms
Weight approx.	900 g
Connection	Connector M12, 5-pin

# Absolute encoders - bus interfaces

Solid shaft ø10 mm with clamping flange


Magnetic multiturn encoders 13 bit ST / 16 bit MT, Profibus-DP

## BMMV 58 Profibus-DP - MAGRES hermetic

### Part number

### Clamping flange

BMMV 58K5N 24P 13/16 H0 P

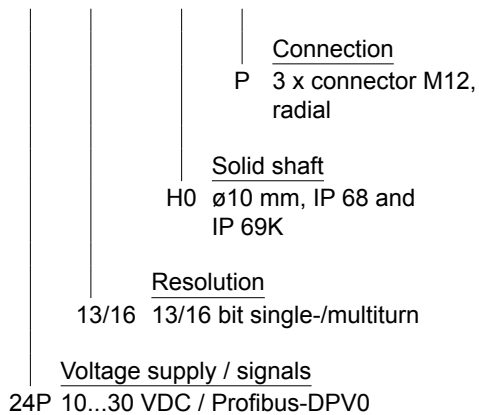

### Accessories

#### Connectors and cables

10157909	Cable with male/female M12, Profibus, straight, B-coded, 2 m
10157910	Cable with male/female M12, Profibus, straight, B-coded, 5 m
10159389	Cable with male/female M12, Profibus, straight, B-coded, 0.3 m (stub line)
10157911	Cable with male/female M12, Profibus, angled, B-coded, 2 m
10157912	Cable with male/female M12, Profibus, angled, B-coded, 5 m
10132540	Female connector M12, angled, A-coded, 2 m for MAGRES hermetic Profibus
10127803	Female connector M12, straight, A-coded, 2 m for MAGRES hermetic Profibus

#### Mounting accessories

10252773	Clamp set ø15 mm
11053277	Bellows coupling aluminium/stainless steel 10 mm

#### Programming accessories

10147362	CD-ROM with GSD-/EDS-/XML files and user manuals
----------	--

# Absolute encoders - bus interfaces

Solid shaft  $\varnothing 10$  mm with clamping flange

Magnetic multiturn encoders 13 bit ST / 16 bit MT, Profibus-DP

## BMMV 58 Profibus-DP - MAGRES hermetic

### Terminal significance

+Vs	Encoder supply voltage.
0 V	Encoder ground connection relating to +Vs.
+VsDP	Supply voltage VP Profibus +5 VDC, to supply an external terminating resistor.
0 VDP	Data Ground Profibus (reference potential to +VsDP), to supply an external terminating resistor.
A line green	Profibus-DP signal cable green (RxD / TxD – P)
B line red	Profibus-DP signal cable red (RxD / TxD – N)


### Profibus-DP features

Bus protocol	Profibus-DP
Profibus Features	Device Class 1 and 2
Preset	Parameter for setting the encoder to a requested position value assigned to a defined shaft position of the system. The offset of encoder zero point and mechanical zero point is stored in the encoder.
Rotating direction	Parameter for defining the rotating direction in which there have to be ascending or descending position values. Default setting: ascending position values when looking at the flange and rotating the shaft clockwise.
Scaling	Parameter defining the steps per turn as well as the total resolution.
Diagnosis	The encoder supports the following error warnings: - Position and parameter error - Lithium battery voltage control (Multiturn)
Default	Node ID 3

### Terminal assignment

#### Connector M12 Bus-IN male


Connector	Signals	Description
Pin 1	n.c.	–
Pin 2	A line green	Cable green / Profibus-DP
Pin 3	n.c.	–
Pin 4	B line red	Cable red / Profibus-DP
Pin 5	n.c.	–
B-coded		



#### Connector M12 Bus-OUT female


Connector	Signals	Description
Pin 1	+VsDP	VP Profibus +5 VDC <sup>1)</sup>
Pin 2	A line green	Cable green / Profibus-DP
Pin 3	0 VDP	DGND Profibus <sup>1)</sup>
Pin 4	B line red	Cable red / Profibus-DP
Pin 5	n.c.	–
B-coded		

<sup>1)</sup> for optional external terminating resistor



#### Connector M12 supply voltage

Connector	Signals	Description
Pin 1	+Vs	Supply voltage
Pin 2	n.c.	–
Pin 3	0 V	Supply voltage
Pin 4	0 V	Supply voltage
Pin 5	n.c.	–
A-coded		



# Absolute encoders - bus interfaces


Solid shaft  $\varnothing 10$  mm with clamping flange

Magnetic multturn encoders 13 bit ST / 16 bit MT, Profibus-DP


## BMMV 58 Profibus-DP - MAGRES hermetic

### Dimensions

#### BMMV 58 hermetic Profibus-DP

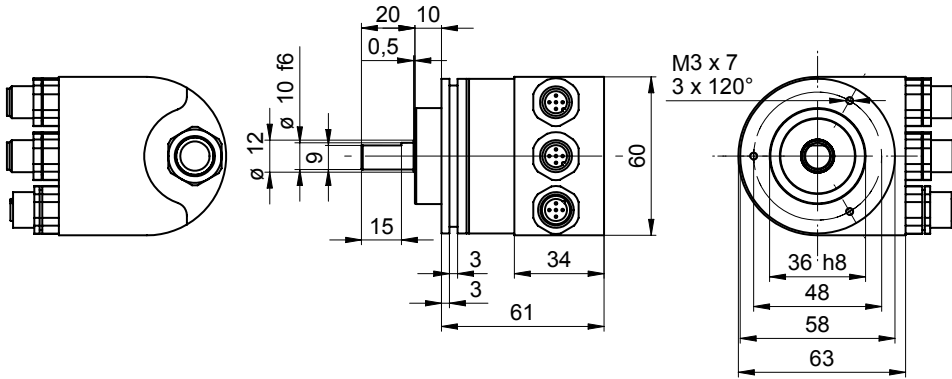

#### User address



Address can be set with rotary switches.  
Example: User address 23

#### Terminating resistor



ON = Last User  
OFF = User X