

Encoders without bearings - absolute

Magnetic sensor bore max. $\varnothing 12$ mm

Magnetic single- or multiturn encoders / kit 12 bit ST / 18 bit MT

BMSK 58, BMMK 58 flexibel - MAGRES



BMMK 58 flexible kit

Features

- Encoder kit single- or multiturn / bus cover
- Magnetic sensing
- Resolution: singleturn 12 bit, multiturn 18 bit
- Modular fieldbus interfaces
- High resistance to shock and vibrations
- CANopen®/DeviceNet/EtherCAT/EtherNet-IP
SAEJ1939/PROFINET/PoE/POWERLINK/Profibus
- Resolution and zero point programmable

Technical data - electrical ratings

Voltage supply	10...30 VDC
Consumption typ.	100 mA (24 VDC, w/o load)
Sensing method	Magnetic
Initializing time typ.	170 ms after power on
Steps per turn	≤ 4096 / 12 bit
Absolute accuracy	$\pm 1^\circ$
Interfaces	CANopen®, DeviceNet, EtherCAT, EtherNet/IP, PoE, Profibus-DPV0/V2, PROFINET, POWERLINK, SAEJ1939
Device adress	Rotary switch in bus cover
Code	Binary
Code sequence	CW default, programmable
Diagnostic functions	Position or parameter error Multiturn sensing
Status indicator	DUO-LED integrated in bus cover
Programmable parameters	Steps per revolution Number of revolutions Preset Scaling Rotating direction
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823
BMMK 58	
Number of turns	≤ 262144 / 18 bit
Function	Multiturn
BMSK 58	
Function	Singleturn

Technical data - mechanical design

Size (flange)	$\varnothing 58$ mm
Shaft type	$\varnothing 12$ mm (magnet bore)
Protection DIN EN 60529	IP 67
Gap tolerance	≤ 0.3 mm axial ≤ 0.1 mm radial
Operating temperature	$-20 \dots +85$ °C
Operating speed	≤ 12000 rpm (mechanical) ≤ 6000 rpm (electric)
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Materials	Housing: steel Flange: aluminium Bus cover: zinc die-cast
Relative humidity	95 %
Connection	Bus cover
Weight approx.	480 g

Encoders without bearings - absolute

Magnetic sensor bore max. \varnothing 12 mm

Magnetic single- or multiturn encoders / kit 12 bit ST / 18 bit MT

BMSK 58, BMMK 58 flexibel - MAGRES

Part number

Multiturn

BMMK 58S1N 12

			<u>Connection</u>
			D Complete encoder with bus cover / cable gland (w/o 246)
			G Basic encoder without bus cover
			E Complete encoder with bus cover, M12
			<u>Solid shaft</u>
	12		\varnothing 12 mm magnet bore
			<u>Resolution</u>
12/18			12/18 bit single-/multiturn (only CANopen)
12/16			12/16 bit single-/multiturn
			<u>Voltage supply / signals</u>
24B	10...30 VDC		/ CANopen®
24D	10...30 VDC		/ DeviceNet
24P	10...30 VDC		/ Profibus-DPV0
24Q	10...30 VDC		/ Profibus-DPV2
246	10...30 VDC		/ EtherCAT
24I	10...30 VDC		/ EtherNet/IP
242	10...30 VDC		/ Power over EtherCAT*
24L	10...30 VDC		/ POWERLINK
24H	10...30 VDC		/ PROFINET
24J	10...30 VDC		/ SAEJ1939
24C	10...30 VDC		/ basic encoder

Singleturn

BMSK 58S1N 12/00 12

			<u>Connection</u>
			D Complete encoder with bus cover / cable gland (w/o 246)
			G Basic encoder without bus cover
			E Complete encoder with bus cover, M12
			<u>Solid shaft</u>
	12		\varnothing 12 mm magnet bore
			<u>Resolution</u>
12/00			12 bit singleturn
			<u>Voltage supply / signals</u>
24B	10...30 VDC		/ CANopen®
24D	10...30 VDC		/ DeviceNet
24P	10...30 VDC		/ Profibus-DPV0
24Q	10...30 VDC		/ Profibus-DPV2
246	10...30 VDC		/ EtherCAT
24I	10...30 VDC		/ EtherNet/IP
242	10...30 VDC		/ Power over EtherCAT*
24L	10...30 VDC		/ POWERLINK
24H	10...30 VDC		/ PROFINET
24J	10...30 VDC		/ SAEJ1939
24C	10...30 VDC		/ basic encoder

CD with file descriptions is not included in the delivery.
You may order them on CD as accessory under part number 10147362.

* Power over EtherCAT on request

Encoders without bearings - absolute

Magnetic sensor bore max. $\varnothing 12$ mm

Magnetic single- or multiturn encoders / kit 12 bit ST / 18 bit MT

BMSK 58, BMMK 58 flexibel - MAGRES

Accessories

Connectors and cables

10160565	Cable connector/connector M12, EtherCAT, straight, 5 m
11046266	Female connector M12, 5-pin, straight, shielded, 5 m
11046264	Female connector M12, 5-pin, straight, shielded, 2 m
10153968	Female connector M12, 5-pin, straight
10157909	Cable with male/female M12, Profibus, shielded, straight, B-coded, 2 m
10157910	Cable with male/female M12, Profibus, shielded, straight, B-coded, 5 m
10159389	Cable with male/female M12, Profibus, shielded, straight, B-coded, 0.3 m (stub line)
10157911	Cable with male/female M12, Profibus, shielded, angled, B-coded, 2 m
10157912	Cable with male/female M12, Profibus, shielded, angled, B-coded, 5 m

Mounting accessories


10110616	Clamp set $\varnothing 15$ mm
10112432	Hexagon wrench 2.5 mm

Programming accessories

10147362	CD-ROM with GSD-/EDS-/XML files and user manuals
----------	--

Dimensions

BMSK/BMMK 58 flexible encoder with bus cover

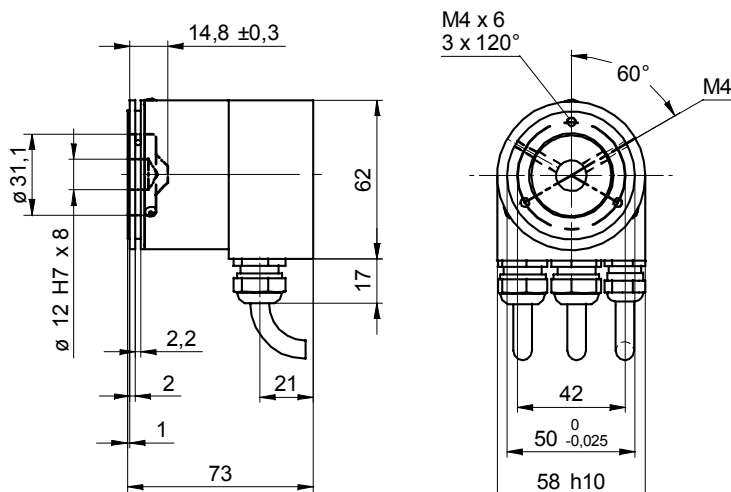

Encoders without bearings - absolute


Magnetic sensor bore max. $\varnothing 12$ mm

Magnetic single- or multiturn encoders / kit 12 bit ST / 18 bit MT


BMSK 58, BMMK 58 flexibel - MAGRES

Dimensions


Profibus-DP/CANopen®




Profibus-DP - M12




DeviceNet




CANopen®/DeviceNet M12




EtherCAT/EtherNet-IP




Power over EtherCAT



PROFINET/POWERLINK



SAEJ1939



SAEJ1939 - M12

