

Combination

Twin tachogenerator with integrated electronic speed switch

Solid shaft with EURO flange B10

TDPZ 0,2 + ESL



TDPZ 0,2 + ESL

Features

- Low response time
- Open circuit voltage 20...100 mV per rpm
- Redundant tachogenerator output
- High signal quality due to patented LongLife technology
- Recognition of sense of rotation possible via control
- Electronic speed monitoring
- Circuit breaker with up to three selectable threshold speeds

Optional

- Housing foot (B3)

Technical data - electrical ratings

Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3

Technical data - electrical ratings (tachogenerator)

Reversal tolerance	≤0.1 %
Linearity tolerance	≤0.15 %
Temperature coefficient	±0.05 %/K (open-circuit)
Isolation class	B
Calibration tolerance	±1 %
Climatic test	Humid heat, constant (IEC 60068-2-3, Ca)
Performance	2x 3 W (speed ≥3000 rpm)
Armature-circuit time-constant	<40 μs
Open-circuit voltage	20...100 mV per rpm

Technical data - electrical ratings (speed switches)

Switching accuracy	±4 % (≤1500 rpm) ±2 % (>1500 rpm)
Switching hysteresis	≤30 % of switching speed
Switching delay time	≤40 ms

TDPZ 0,2 + ESL 90

Switching outputs	1 output, speed control
Output switching capacity	≤6 A / 250 VAC ≤1 A / 48 VDC
Minimum switching current	100 mA

TDPZ 0,2 + ESL 93

Voltage supply	12 VDC ±10 %
Consumption w/o load	≤5 mA
Switching outputs	3 outputs, speed control
Current each output	40 mA (DC)

Technical data - mechanical design

Size (flange)	ø115 mm
Shaft type	ø11 mm solid shaft
Admitted shaft load	≤60 N axial ≤80 N radial
Flange	EURO flange B10
Protection DIN EN 60529	IP 55
Torque	1.5 Ncm
Rotor moment of inertia	1.5 kgcm ²
Materials	Housing: aluminium die-cast Shaft: stainless steel
Operating temperature	-20...+85 °C
Resistance	IEC 60068-2-6 Vibration 5 g, 10-2000 Hz IEC 60068-2-27 Shock 150 g, 1 ms
Connection	2x terminal box
Weight approx.	3.4 kg
Approval	CE

TDPZ 0,2 + ESL 90

Speed (n)	≤6000 rpm
Range of switching speed (ns)	650...6000 rpm

TDPZ 0,2 + ESL 93

Speed (n)	≤5000 rpm
Range of switching speed (ns)	200...5000 rpm

Combination

Twin tachogenerator with integrated electronic speed switch Solid shaft with EURO flange B10

TDPZ 0,2 + ESL

Part number

Twin tachogenerator with speed switch ESL 90

TDPZ0,2LT- +ESL90 ...

- Switching speed (ns)
- ... 650...6000 rpm
- Open-circuit voltage
- 7 20 mV per rpm
- 5 40 mV per rpm
- 4 60 mV per rpm
- 3 100 mV per rpm

* Please specify the exact switching speed in addition to the part number (factory setted threshold).


Data according to type

Type	Open-circuit voltage	Minimum load required depending on speed range [rpm]			Maximum operating speed	Armature resistance	Armature inductance
		0-3000	0-6000	0-n _{max}			
	U ₀ [mV/rpm]	R _L [kΩ]	R _L [kΩ]	R _L [kΩ]	n _{max} [rpm]	R _A (20°C) [Ω]	L _A [mH]
TDPZ0,2LT-7	20	≥1.2	≥4.8	≥14	10000	19	45
TDPZ0,2LT-5	40	≥4.8	≥20	≥54	10000	70	170
TDPZ0,2LT-4	60	≥11	≥44	≥120	10000	160	390
TDPZ0,2LT-3	100	≥30	≥120	---	6000	445	1080


The data refer to each of the two tachogenerator outputs

Superimposed ripple (for τ_{RC} = 0.7 ms): ≤0.5% (peak-peak) ≤0.2% (rms)

Replacement switching diagram

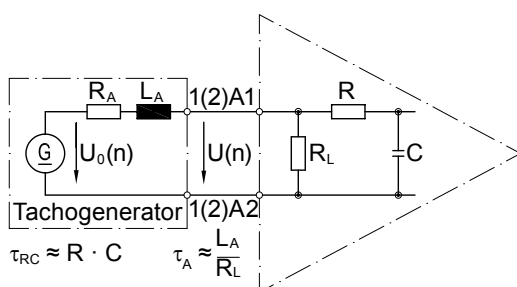

Polarity for positive rotating direction: 1A1, 2A1: + (VDE)
1A2, 2A2: - (VDE)



$$U(n) = U_0(n) \frac{R_L}{R_A + R_L} \approx U_0(n) \text{ for } R > R_L \gg R_A$$

Combination

Twin tachogenerator with integrated electronic speed switch

Solid shaft with EURO flange B10

TDPZ 0,2 + ESL

Part number

Twin tachogenerator with speed switch ESL 93

TDPZ0,2LT- +ESL93

- Switching speed 3 (ns3)
... 200...5000 rpm
- Switching speed 2 (ns2)
... 200...5000 rpm
- Switching speed 1 (ns1)
... 200...5000 rpm
- Open-circuit voltage
 - 7 20 mV per rpm
 - 5 40 mV per rpm
 - 4 60 mV per rpm
 - 3 100 mV per rpm

Please indicate the exact switching rotation speeds (permanent parameter defined at works).


Data according to type

Type	Open-circuit voltage	Minimum load required depending on speed range [rpm]			Maximum operating speed	Armature resistance	Armature inductance
		0-3000	0-6000	0-n _{max}			
	U ₀ [mV/rpm]	R _L [kΩ]	R _L [kΩ]	R _L [kΩ]	n _{max} [rpm]	R _A (20°C) [Ω]	L _A [mH]
TDPZ0,2LT-7	20	≥1.2	≥4.8	≥14	10000	19	45
TDPZ0,2LT-5	40	≥4.8	≥20	≥54	10000	70	170
TDPZ0,2LT-4	60	≥11	≥44	≥120	10000	160	390
TDPZ0,2LT-3	100	≥30	≥120	---	6000	445	1080


The data refer to each of the two tachogenerator outputs

Superimposed ripple (for τ_{RC} = 0.7 ms): ≤0.5% (peak-peak) ≤0.2% (rms)

Replacement switching diagram

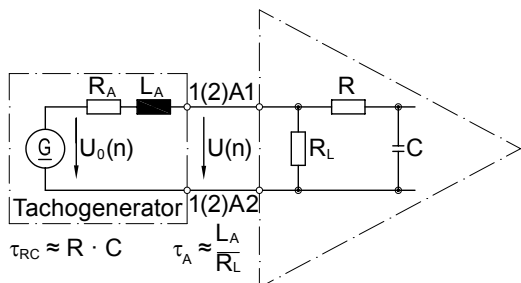

Polarity for positive rotating direction: 1A1, 2A1: + (VDE)
1A2, 2A2: - (VDE)

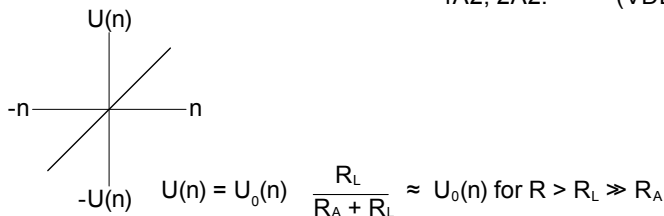

Combination


Twin tachogenerator with integrated electronic speed switch Solid shaft with EURO flange B10

TDPZ 0,2 + ESL

Terminal assignment


View A - Connecting terminal TDPZ 0,2

Polarity for positive direction of rotation

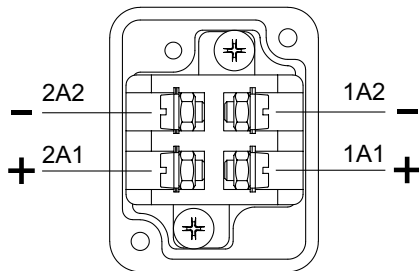


View B

Connecting terminal electronic speed switch ESL 90

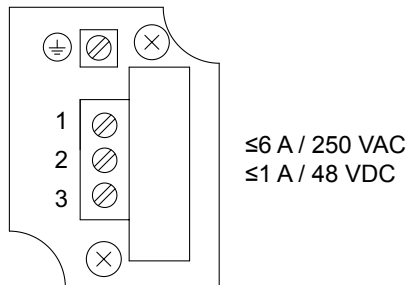

View B

Connecting terminal electronic speed switch ESL 93

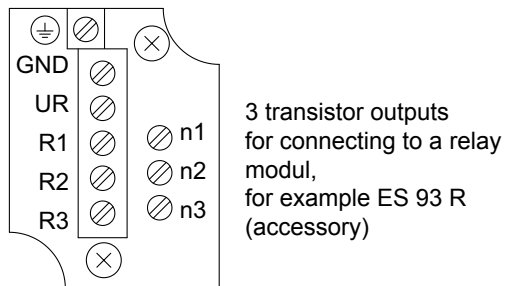

Accessories

Carbon brushes

Mounting accessories

K 35	Spring washer coupling for solid shaft $\varnothing 6 \dots 12 \text{ mm}$
K 50	Spring washer coupling for solid shaft $\varnothing 11 \dots 16 \text{ mm}$
K 60	Spring washer coupling for solid shaft $\varnothing 11 \dots 22 \text{ mm}$


Combination

Twin tachogenerator with integrated electronic speed switch



Solid shaft with EURO flange B10

TDPZ 0,2 + ESL


Block circuit diagram

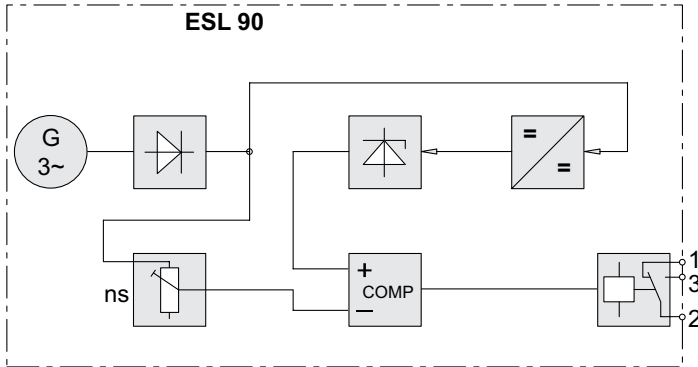


Switching characteristics

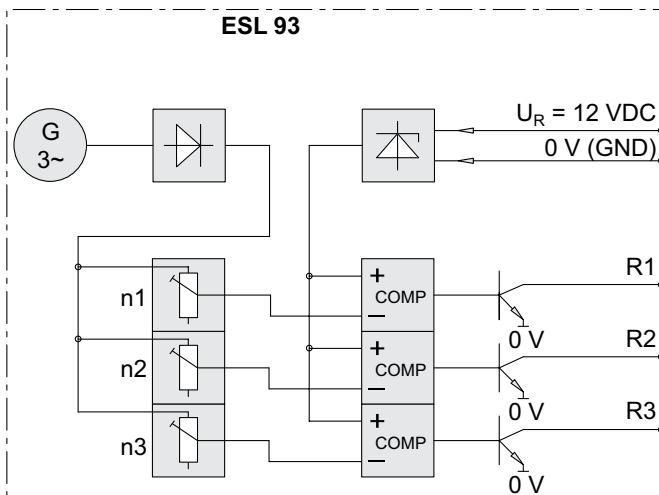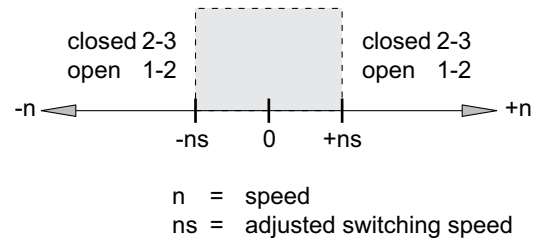

Recommended output circuit

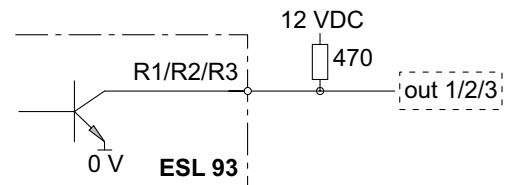

Switching characteristics

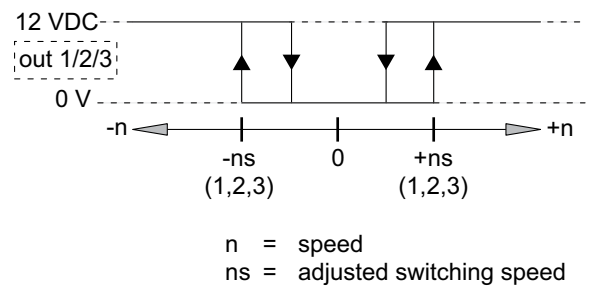


Combination

Twin tachogenerator with integrated electronic speed switch Solid shaft with EURO flange B10

TDPZ 0,2 + ESL

Dimensions

TDPZ 0,2 + ESL - Version with Euro flange (B10)

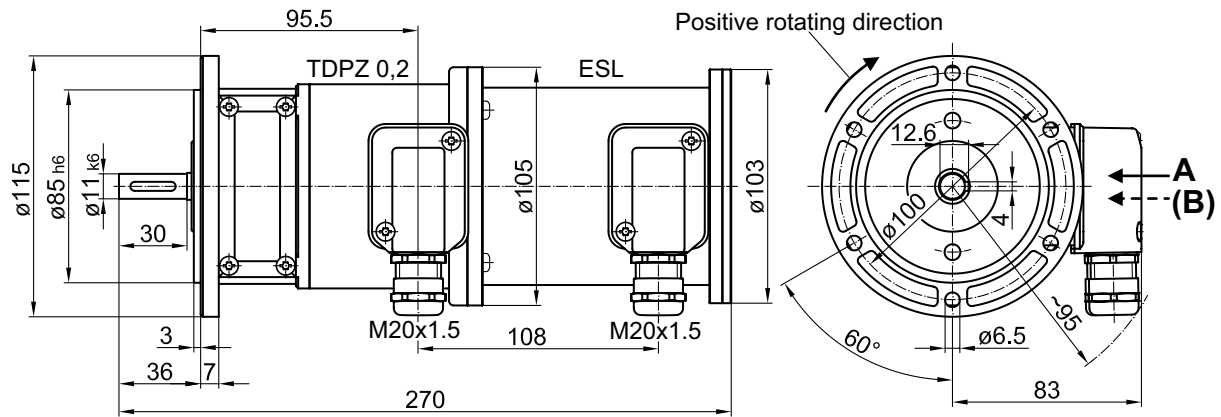

TDPZ 0,2 + ESL - Version with housing foot (B3)

