


**Through beam sensors**

**FEAM 08P3002**

**dimension drawing**

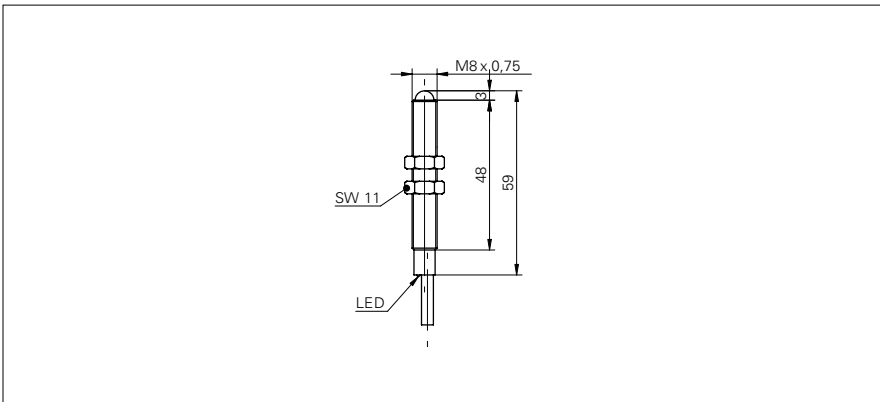

**general data**

type	through beam sensor
emitter / receiver	receiver
actual range $S_b$	2,5 m
nominal range $S_n$	3 m
alignment / soiled lens indicator	flashing light indicator
light indicator	LED red
sensitivity adjustment	no

**electrical data**

response time / release time	< 2,5 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	24 mA
current consumption typ.	24 mA
voltage drop Vd	< 2 VDC
output function	dark operate
output circuit	PNP
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

width / diameter	8 mm
height / length	59 mm
type	cylindrical threaded
housing material	brass nickel plated
front (optics)	PC
connection types	cable 3 pin, 2 m

**ambient conditions**

operating temperature	-25 ... +65 °C
protection class	IP 65

**photo**



**connection diagram**

