


Retro-reflective sensors

FPDM 12N3401/S35A

dimension drawing

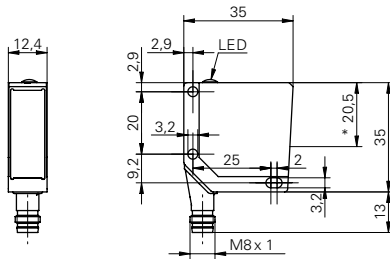

* emitter axis

general data

type	retro-reflective sensor
light source	pulsed red LED
actual range S_b	5 m
nominal range S_n	5,2 m
polarization filter	yes
alignment / soiled lens indicator	flashing light indicator
light indicator	LED yellow
sensitivity adjustment	no
wave length	660 nm
suppression of reciprocal influence	yes

electrical data

response time / release time	< 1 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	35 mA
current consumption typ.	25 mA
voltage drop V_d	< 1,8 VDC
output function	alarm output dark
output circuit	NPN
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data

width / diameter	12,4 mm
height / length	35 mm
depth	35 mm
type	rectangular
housing material	die-cast zinc
front (optics)	PMMA
connection types	connector M8 4 pin


ambient conditions

operating temperature	-25 ... +65 °C
protection class	IP 67

photo



connection diagram

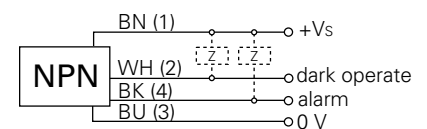

- output state: Version with alarm output must be ordered either dark operate or light operate.