


Inductive proximity switch

IFRM 03N3501/KS35L

dimension drawing



standard cable length 200 mm (L)

general data

| | |
|--------------------------------|---------------------|
| mounting type | flush |
| nominal sensing distance S_n | 0,8 mm |
| hysteresis | 2 ... 20 % of S_r |
| output indicator | LED red |

electrical data

| | |
|------------------------------------|-------------------------|
| switching frequency | < 3 kHz |
| voltage supply range +Vs | 10 ... 30 VDC |
| current consumption max. (no load) | 12 mA |
| output circuit | NPN break function (NC) |
| voltage drop V_d | < 2 VDC |
| output current | < 100 mA |
| short circuit protection | yes |
| reverse polarity protection | yes |

mechanical data

| | |
|-------------------------|----------------------|
| type | cylindrical smooth |
| material (sensing face) | POM |
| housing material | stainless steel |
| dimension | 3 mm |
| housing length | 22 mm |
| connection types | flylead connector M8 |


ambient conditions

| | |
|-----------------------|----------------|
| operating temperature | -25 ... +75 °C |
| protection class | IP 67 |

photo



connection diagram

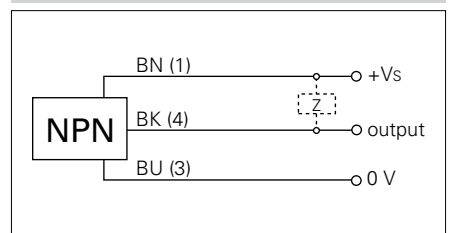

- 22 mm standard version
- flylead connector version