


# Diffuse sensors with background suppression

## OHDM 12P6901/S35A

### dimension drawing

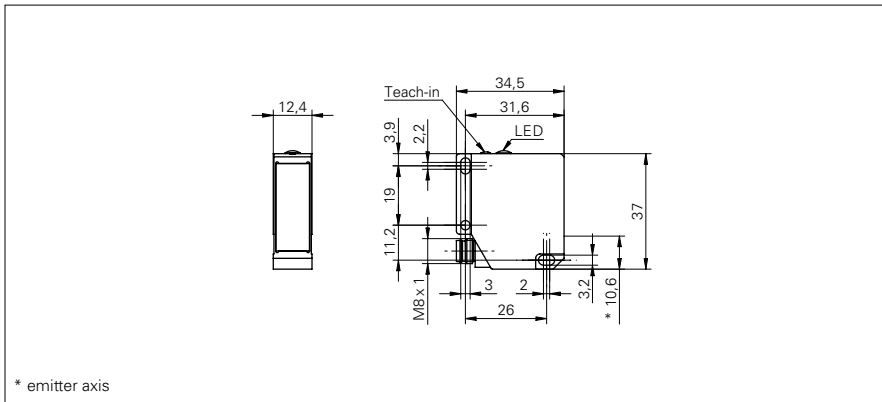

### general data

type	background suppression
light source	pulsed red laser diode
sensing distance Tw	17 ... 120 mm
sensing range Tb (at Tw max.)	16 ... 120 mm
sensing range Tb (at Tw min.)	16 ... 17 mm
power on indication	LED green
light indicator	LED red
sensing distance adjustment	Teach-in
laser class	2
wave length	675 nm
beam diameter	0,9 ... 0,5 mm


### photo



### electrical data

response time	< 1 ms
release time	< 2,7 ms
voltage supply range +Vs	12 ... 28 VDC
current consumption max. (no load)	80 mA
current consumption typ.	40 mA
voltage drop Vd	< 2,8 VDC
output function	light / dark operate
output circuit	PNP
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes, Vs to GND


### connection diagram

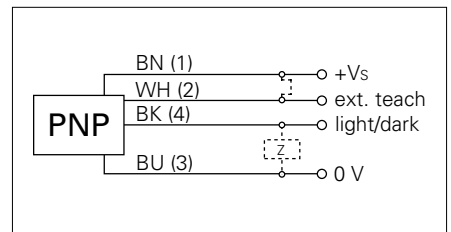

### mechanical data

width / diameter	12,4 mm
height / length	37 mm
depth	34,5 mm
type	rectangular
housing material	die-cast zinc
front (optics)	glass
connection types	connector M8 4 pin

### laser warning

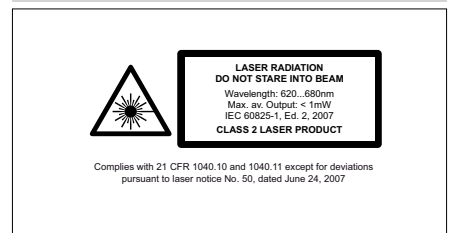

## Diffuse sensors with background suppression

## OHDM 12P6901/S35A

### ambient conditions

operating temperature	0 ... +50 °C
protection class	IP 67