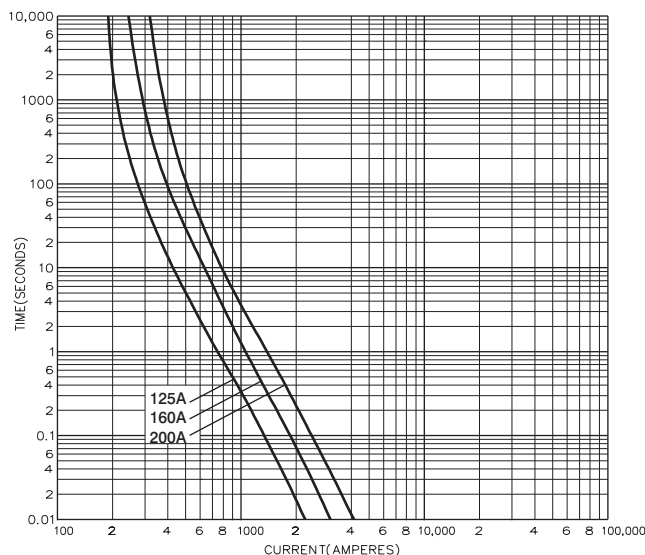
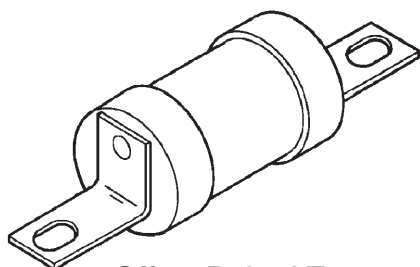
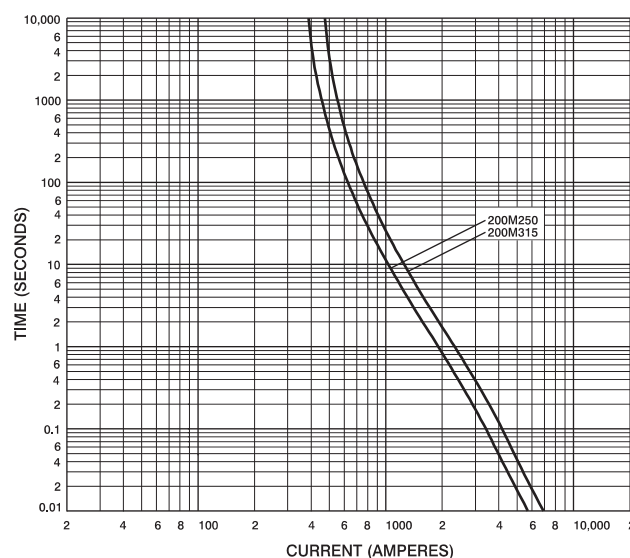
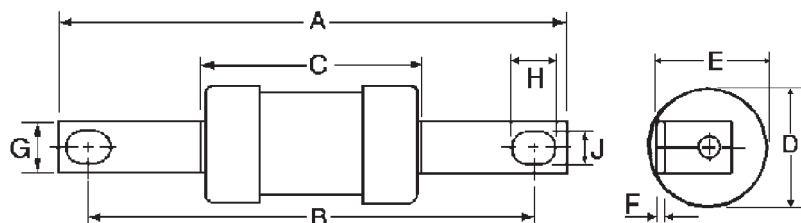


# BS88, IEC269 Industrial HRC Fuse Links

## Offset Bolted Tags 415V ac 125-200 Amps

**DEO**

### Time-Current Characteristic Curves

**Non Motor Rated**

**Motor Rated**

**Offset Bolted Tag**

**Dimensional Data**

Catalog Number	I²t (Amps² Seconds)			Nom. Watts Loss	Rated Voltage	Dimensions (mm)								
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H	J
DEO125	125	29500	71000	11	415 ac	110	94.0	47.0	31.0	29.5	3.2	19.0	10.0	9.0
DEO160	160	57000	135000	13										
DEO200	200	120000	290000	14										
DEO200M250	200M250	200000	480000	11										
DEO200M315	200M315	265000	635000	9										

**Packaging - 5 per carton**

This bulletin is intended to clearly present product data and provide technical information that will help the end user with design applications. If there is any information that you require that is not recorded on this Data Sheet, please call our Application Engineers at Bussmann UK. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Bussmann Division**  
**Cooper (U.K.) Ltd**  
 Burton-on-the-Wolds  
 Leicestershire, LE12 5TH  
 United Kingdom  
 Tel: (44) (0)1509 88 27 37  
 Fax: (44) (0)1509 88 27 86

**Head Office**  
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



**Bussmann Information Fax (00 1) 314 527 1450**  
 Bussmann WEB site - <http://222.bussmann.com>

A **COOPER** Industries Company