

## FWH

6x32mm high speed ferrule fuses



### Catalog symbols:

- FWH-(amp)A6F
- FWH-(amp)A6FR (RoHS compliant)
- FWH5-(amp)A6F
- FWH5-(amp)A6FR (RoHS compliant)

### Description:

Eaton's Bussmann® series of FWH 6x32mm ferrule high speed fuses are for the protection of DC common bus, DC drives, power converters/rectifiers and reduced rated voltage starters.

### Specification:

#### Ratings

- Volts
  - 500Vac (0.25-1A and 3.15-30A)
  - 1000Vac (2A)
  - 600Vdc (1-5A)
- Amps
  - 0.25-30A
- Interrupting rating
  - 50kA AC (0.25-1A and 3.15-20A)
  - 30kA AC (2A)
  - 20kA AC (25-30A)
  - 50kA DC (1-5A)


### Agency information

- CE
- RoHS compliant
- UL® Recognized JFHR2, E91958, 0.25-7A
- UL Recognized JDYX2, E19180, 10-30A
- CSA® Component Acceptance file Class 1422-30, 1422-90 (53787) 0.25-7A

### Opening times:

Amp range	150%	200%	300%
0.25-7A	> 30 min.	> 30 min.	≤ 10 sec.
10-30A	> 30 min.	> 30 min.	≤ 10 sec.

### Dimensions:

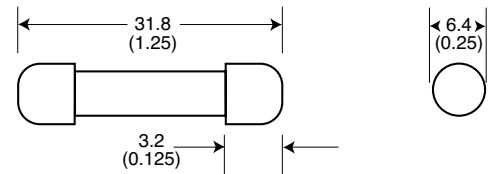

### Features:

- Low watts loss in a compact size
- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through ( $I^2t$ )

### Typical applications:

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters



Powering Business Worldwide

## Catalog numbers:

Rated voltage		I <sup>2</sup> t (A <sup>2</sup> s)					Catalog numbers	
Amps	Vac	Vdc	Pre-arcing	Clearing @ 500Vac	Watts loss (W)		Standard	RoHS compliant
0.25	500	—	0.01	0.05	2.7		FWH-250A6F	FWH-250A6F
0.5	500	—	0.05	0.25	1.2		FWH-500A6F	FWH-500A6F
1	500	600	0.4	2	1.7		FWH-001A6F	FWH-001A6F
2	1000	600	1.3	3.5	3.2		FWH-002A6F	FWH-002A6F
3.15	500	600	3.1	7.7	2.9		FWH-3.15A6F	FWH-3.15A6F
4	500	600	—	—	—		FWH-004A6F	FWH-004A6F
5	500	600	15	40	2.1		FWH-005A6F	FWH-005A6F
6.3	500	—	36	90	2.3		FWH-6.30A6F	FWH-6.30A6F
7	500	—	50	125	2.5		FWH-007A6F	FWH-007A6F
10	500	—	9.9	139	2.86		FWH5-010A6F	FWH5-010A6FR
12.5	500	—	20	60	3.53		FWH5-12-5A6F	FWH5-12-5A6FR
15	500	—	44	146	3.08		FWH5-015A6F	FWH5-015A6FR
16	500	—	48	177	4.48		FWH5-016A6F	FWH5-016A6FR
20	500	—	75	259	4.26		FWH5-020A6F	FWH5-020A6FR
25	500	—	126	345	—		FWH-025A6F	FWH-025A6FR
30	500	—	145	430	—		FWH-030A6F	FWH-030A6FR

0.25-7A 300% minimum opening current at rated voltage.

10-30A 200% minimum opening current at rated voltage.

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

Bussmann Division  
114 Old State Road  
Ellisville, MO 63021  
United States  
Eaton.com/bussmannseries

© 2015 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 720038 — BU-SB15288  
December 2015

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.  
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.

