



## MK-Z-12/4 Connector

- Metal/plastic housing
- Turnable metal screw
- Quick mounting without tools
- 4 pin
- High protection class

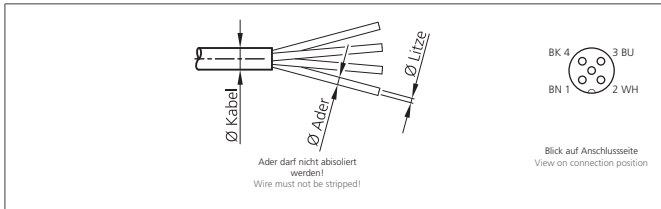

### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.  
These instruments shall exclusively be used by qualified personnel.

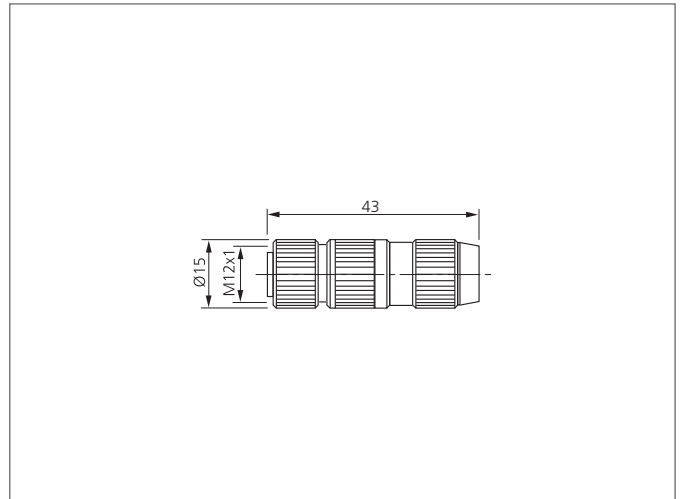

| TECHNICAL INFORMATION (typ.) | +20°C, 24V DC   |
|------------------------------|---|
| Design                       | straight  |
| Service voltage              | 32 V DC   |
| Ambient temperature          | -25 ... +85 °C  |
| Protection class             | IP 67   |
| Casing material              | Metal/Plastic   |
| Connection sensor side       | Socket, M12x1, 4-poled                                      |
| Connection control side      | Field-wireable, Insulation displacement connectors, 4-poled |
| For cable diameters          | 2,9 ... 5,1 mm  |
| For Ø vein                   | 1,0 ... 1,6 mm, (Wire must not be stripped!)                |
| For braids                   | 0,14 ... 0,34 mm <sup>2</sup>                               |