


OGU 05/100 PN3K-TSSL **Optical Label Sensor**




- Metal casing
- Integrated electronic module
- Sensitivity adjustable
- High operating frequency
- Light / dark switching
- Bright ring LED
- High protection class
- 5-year warranty

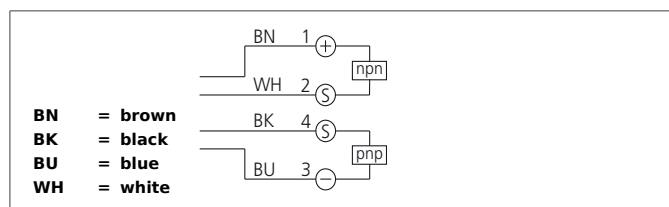

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
 These instruments shall exclusively be used by qualified personnel.

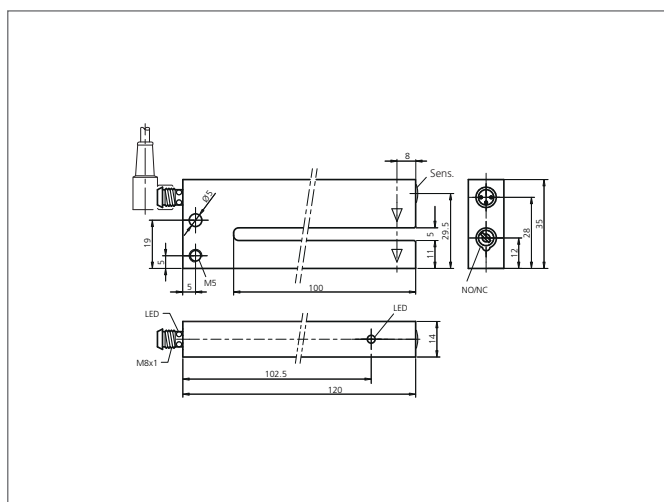

TECHNICAL INFORMATION (typ.)	
Operating principle	+20°C, 24V DC Optical
Evaluation	digital
Size	35 x 120 x 14 mm (Dimensions)
Design	fork
Fork opening	5 mm
Branch length	100 mm
Slot width	5,0 mm
Emitted light	Infrared, 880 nm, non-clocked
Service voltage	10 ... 35 V DC (Supply Class 2)
Internal power consumption	< 45 mA
Sensitivity adjustment	potentiometer
Switching output	pnp+npn, 200 mA, NO/NC, switchable
Switching hysteresis	< 0,1 mm
Voltage drop	< 2,8 V
Switching frequency	10.000 Hz
Ambient temperature	-10 ... +60 °C
Ambient light immunity	10 kLx
Insulation voltage endurance	500 V
Protection class	IP 67
Protection degree	III, operation on protective low voltage
Casing material	Die-cast zinc black lacquered finish
Connection	Connector, M8, 4-poled
Connecting cable	TK ... /4