

# OGU 061 P3K-TSSL

## Fork Light Barrier


- Metal casing
- Integrated electronic module
- Sensitivity adjustable
- High operating frequency
- Light / dark switching
- Bright ring LED
- High protection class
- 5-year warranty



### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

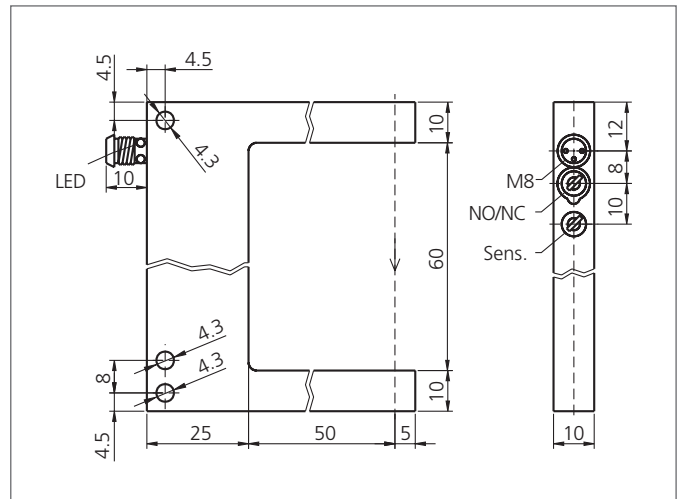

| TECHNICAL INFORMATION (typ.) | +20°C, 24V DC                            |
|------------------------------|--|
| Operating principle          | Optical                                  |
| Evaluation                   | digital                                  |
| Size                         | 80 x 80 x 10 mm (Dimensions)             |
| Design                       | fork                                     |
| Fork opening                 | 60 mm                                    |
| Branch length                | 55 mm                                    |
| Emitted light                | Red, clocked                             |
| Service voltage              | 10 ... 35 V DC                           |
| Internal power consumption   | < 30 mA                                  |
| Resolution                   | Ø 0,5 mm                                 |
| Sensitivity adjustment       | potentiometer                            |
| Switching output             | pnp, 200 mA, NO/NC, switchable           |
| Switching hysteresis         | < 0,25 mm                                |
| Voltage drop                 | 2,8 V                                    |
| Switching frequency          | 4.000 Hz                                 |
| Reproducibility              | 0,06 mm                                  |
| Ambient temperature          | -10 ... +60 °C                           |
| Ambient light immunity       | 40 kLx                                   |
| Insulation voltage endurance | 500 V                                    |
| Protection class             | IP 67                                    |
| Protection degree            | III, operation on protective low voltage |
| Casing material              | Aluminium black anodized                 |
| Connection                   | Connector, M8, 3-poled                   |

**OGU 061 P3K-TSSL**  
**Fork Light Barrier**



**TECHNICAL INFORMATION (typ.)**

**+20°C, 24V DC**

Connecting cable

TK ...