SK-TPN-10
Sensor Clamp

- Input: pnp and npn
- Output: pnp NO, pnp NC, npn NO, npn NC
- Pulse stretching
- Robust casing
- DIN-rail mountable

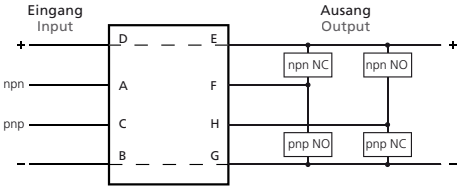



Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Service voltage	10 ... 30 V DC
Internal power consumption	22 mA
Switching output	pnp/npn, 100 mA, NO/NC
Pulse stretching	1 ... 10 s
Display	LED: green - service voltage, red - pnp Schließer-NO, yellow - pnp Öffner-NC
Switching frequency	20.000 Hz
Short-circuit protection	no