


OGUFIX 121 P2K-TSSL

Fork Light Barrier


- Quick commissioning, no setting elements
- No risk of wrong adjustments
- Value for money
- Mountable side by side
- Dark switching
- Metal casing
- High protection class
- 5-year warranty

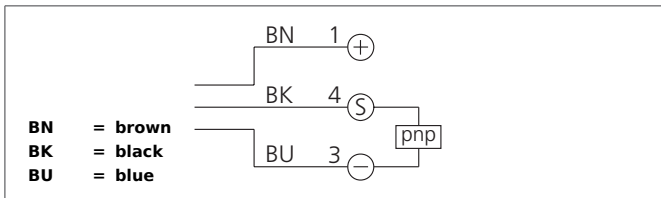

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

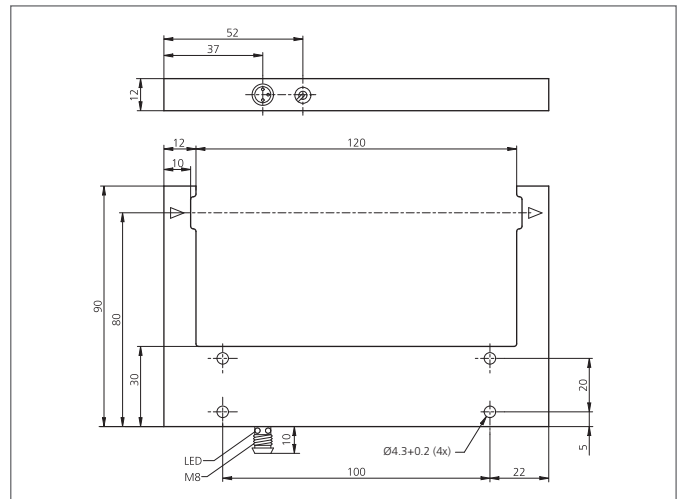

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Operating principle		Optical
Evaluation		digital
Size		144 x 90 x 12 mm (Dimensions)
Design		fork
Fork opening		120 mm
Branch length		60 mm
Emitted light		Red, clocked
Service voltage		10 ... 35 V DC (Supply Class 2)
Internal power consumption		< 30 mA
Resolution		Ø 1,5 mm
Sensitivity adjustment		no setting elements
Switching output		pnp, 200 mA, NO
Switching hysteresis		< 0,25 mm
Voltage drop		2,8 V
Switching frequency		1.500 Hz
Reproducibility		0,06 mm
Ambient temperature		-10 ... +60 °C
Ambient light immunity		40 kLx
Insulation voltage endurance		500 V
Protection class		IP 67
Protection degree		III, operation on protective low voltage
Casing material		Die-cast zinc grey lacquered finish
Connection		Connector, M8, 3-poled

OGUFIX 121 P2K-TSSL
Fork Light Barrier



TECHNICAL INFORMATION (typ.)

+20°C, 24V DC

Connecting cable

TK ...