
## PRKT 4-3-44/5.05 **Connecting cable**



- Protection class IP 69K at tightening torque PRK ... = 0.6 Nm
- High protection class
- Flexible lead design
- Sturdy metal coupling ring

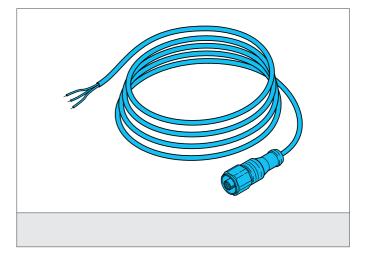

## Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Size	M12 x 1 (thread)
Design	straight
Length	5.000 mm
Service voltage	< 250 V
Protection class	IP 69K, (at tightening torque 0,6 Nm)
Connection	M12, 4-poled, flying leads
Service voltage Protection class	< 250 V IP 69K, (at tightening torque 0,6 Nm)

Fon + 49 (0) 71 81 / 98 79 - 0 🖩 Fax + 49 (0) 71 81 / 98 79 - 179 🗉 info@di-soric.com 🗉 www.di-soric.com 💿 di-soric | Subject to modifications | 20/12/17 | Page 1 (1)